

电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	50	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR		
Storage Temperature Range	TSTR		
/ Lead Soldering Temperature/Time	TSOL	260 ≤ 6S	/

≤

≤


≤

≤

光电参数

Ta=25 Optical-electrical parameter(ta=25)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test conditions
Luminous Intensity	Iv	80	/	210	mcd	IF=20mA
Dominant Wave Length	λ d	600	/	610	nm	IF=20mA
Peak Wave Length	λ p	/	605	/	nm	IF=20mA
Forward Voltage	VF	1.8	/	2.4	V	IF=20mA
Half wave width		/	20	/	nm	IF=20mA
Viewing Angle	2θ1/2	/	120 °	/	deg	IF=20mA
Reverse Current	IR	/	/	≤ 1	μ A	VR=5V



Part No. YL-608UOC-06





外形尺寸


Outline Dimension

Remarks: 1. mm







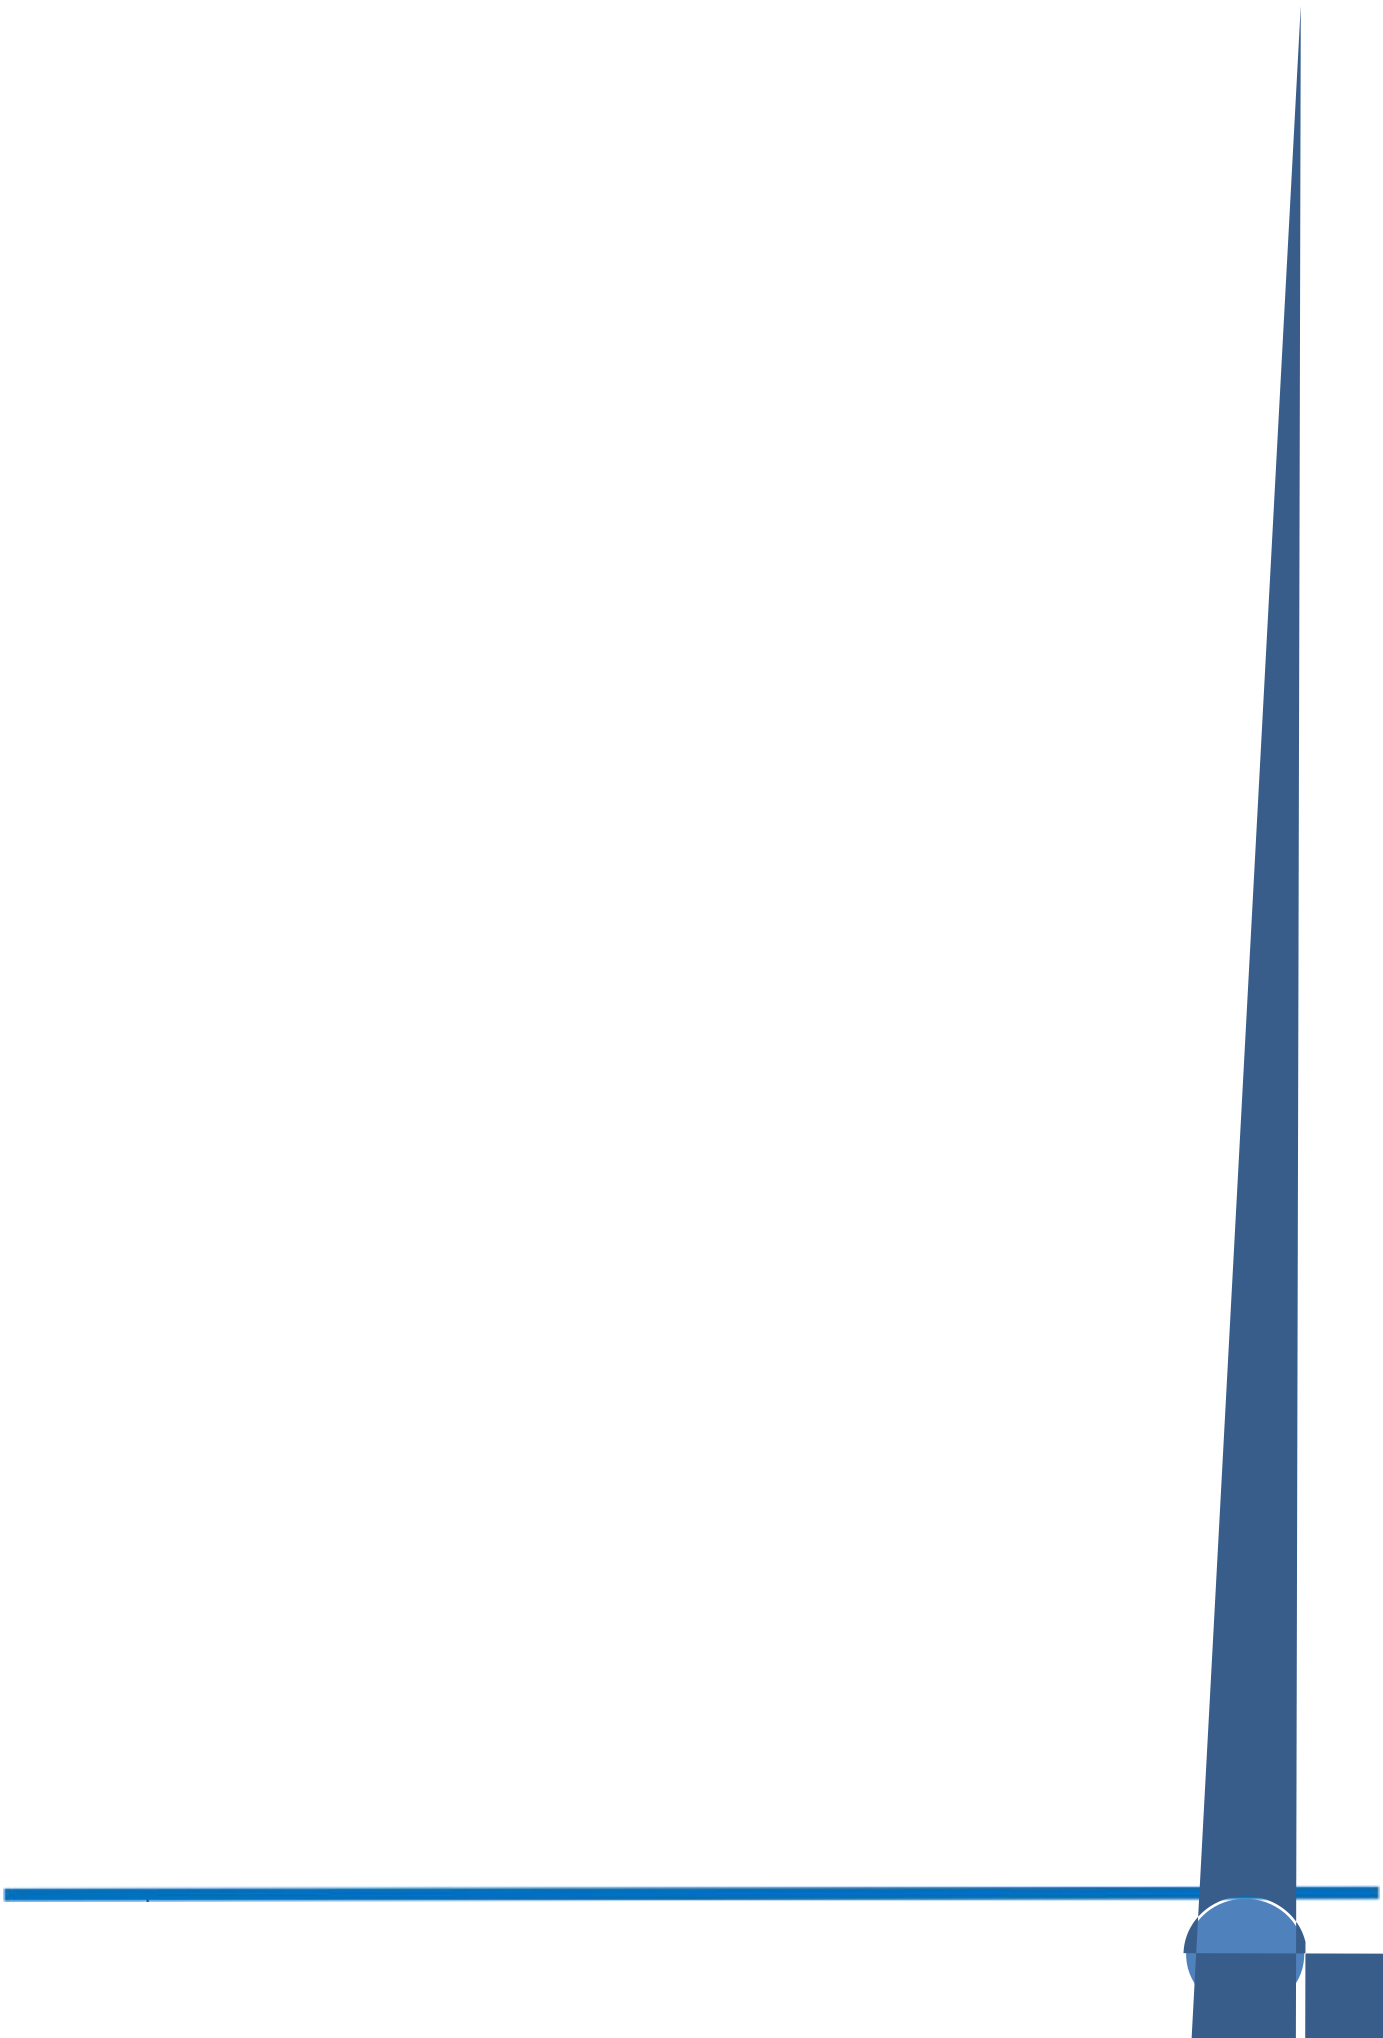



使用注意事项（3）

Precautions (3)