# 典型特性曲线

## Typical Characteristics Curves

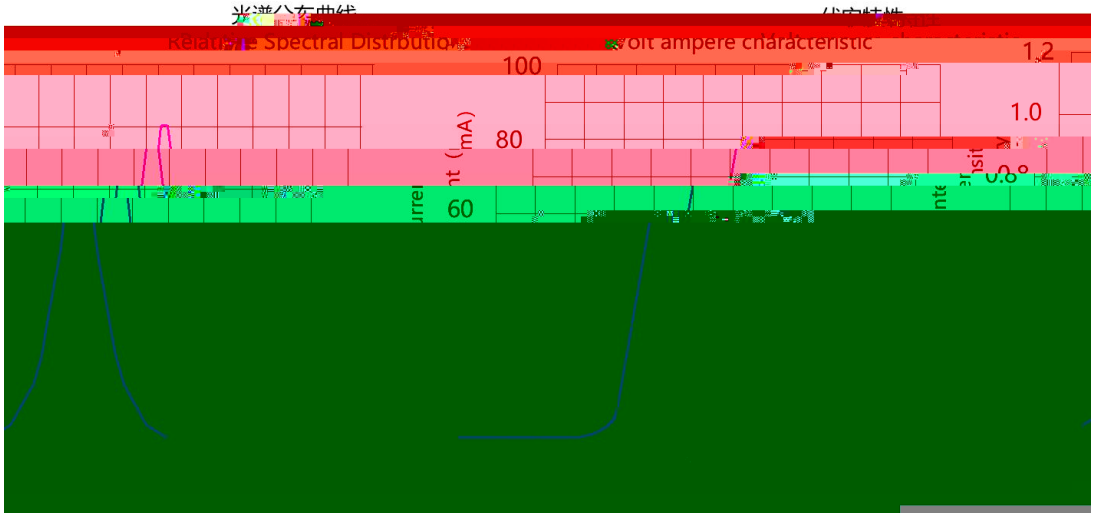

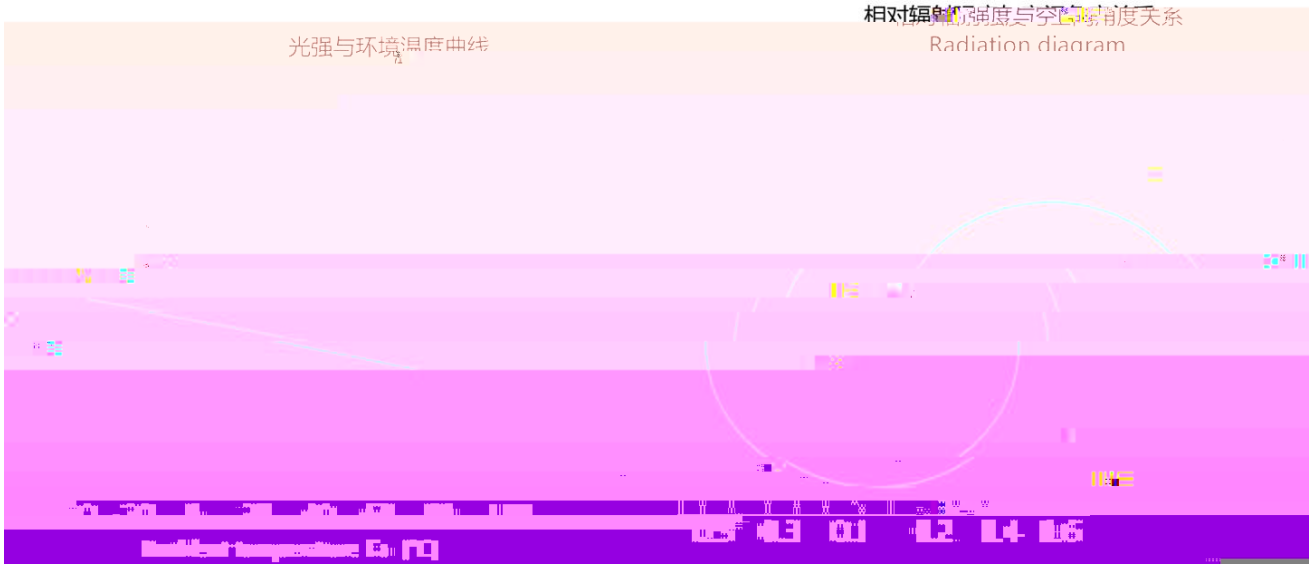


25 5 /Note If not otherwise indicated the test environment temp erature is 25 5

# 使用注意事项（2）

## Precautions (2)

设计建议

LED

A LED B

LED $V_F$ LED

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current

# 使用注意事项（3）

Precautions (3)

其他事项