



DLA-6SGD

F20


技术数据表

特点 () :
* : F20/23*23*19.5mm
Appearance dimensions : F20/23*23*19.5mm
* : /
Luminous color and colloid: Prussian green/green colloid
* A RoHS
Environmental protection products meet ROHS requirements
* MS :2
0
*
*

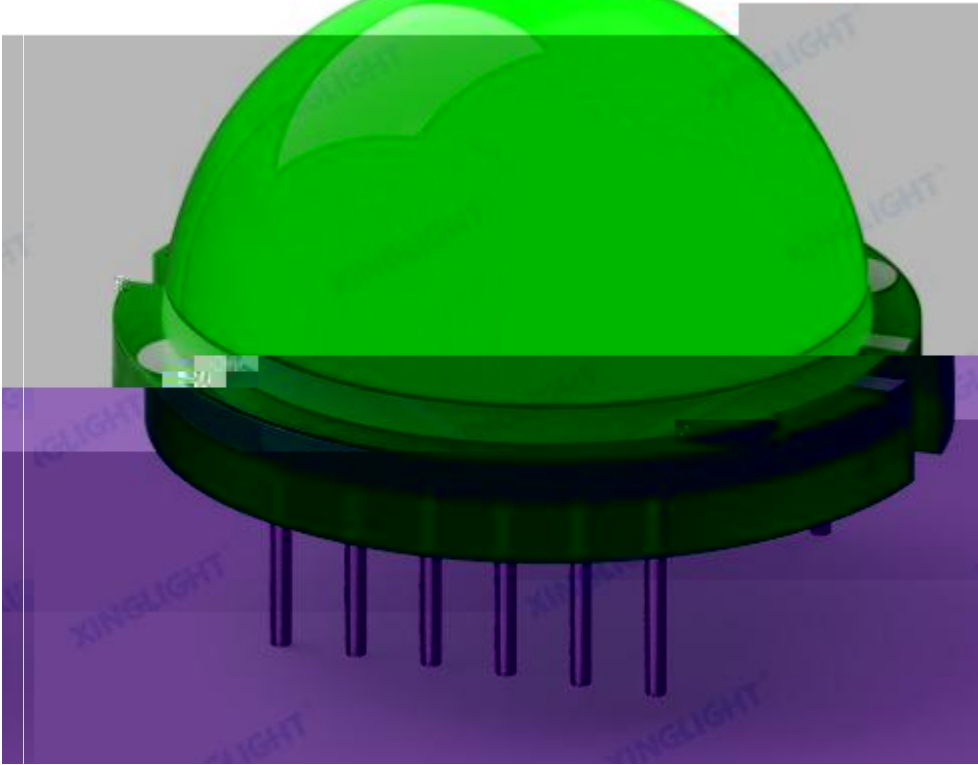




Catalogue



电性参数





亮度分档

:

代码	最小值	最大值	单位	测试条件
----	-----	-----	----	------





电压分档

:

波长分档



典型特性曲线

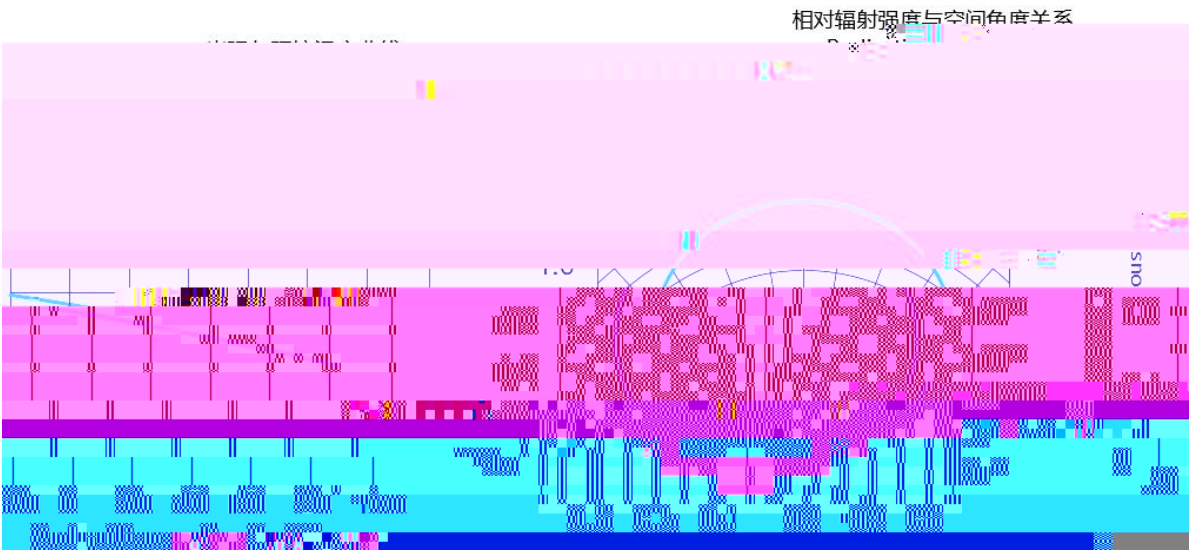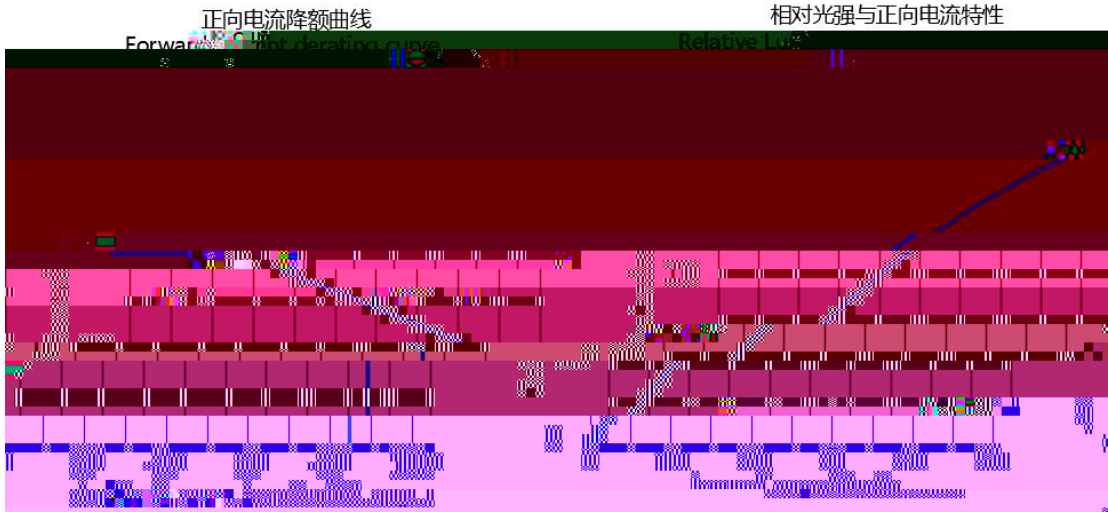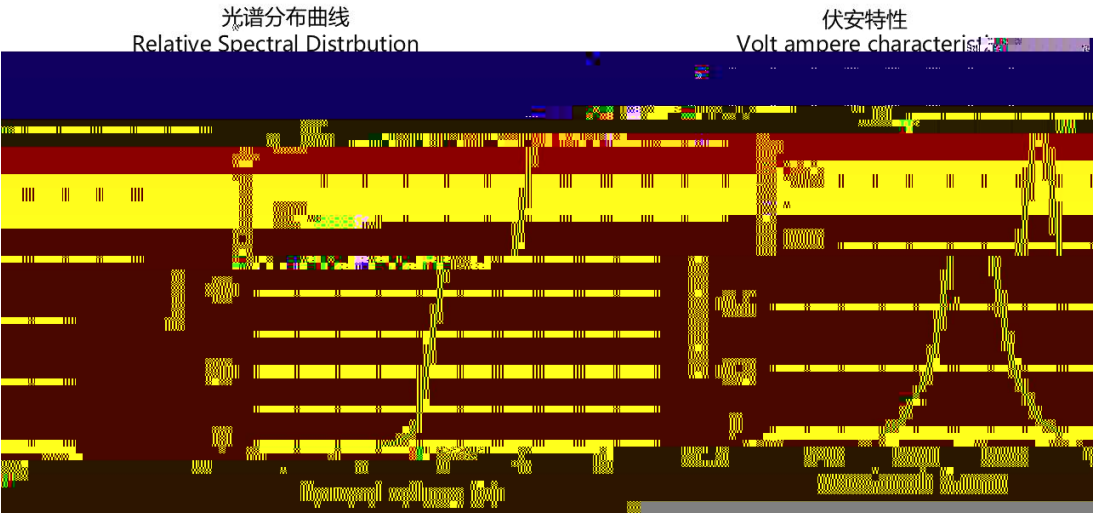


可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ± 5 , IF=25mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ± 5 -40 ± 5 30mins 5mins 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ± 5 -45 ± 5 5mins 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~ 0 °	3times	22 PCS	0/1




外形尺寸

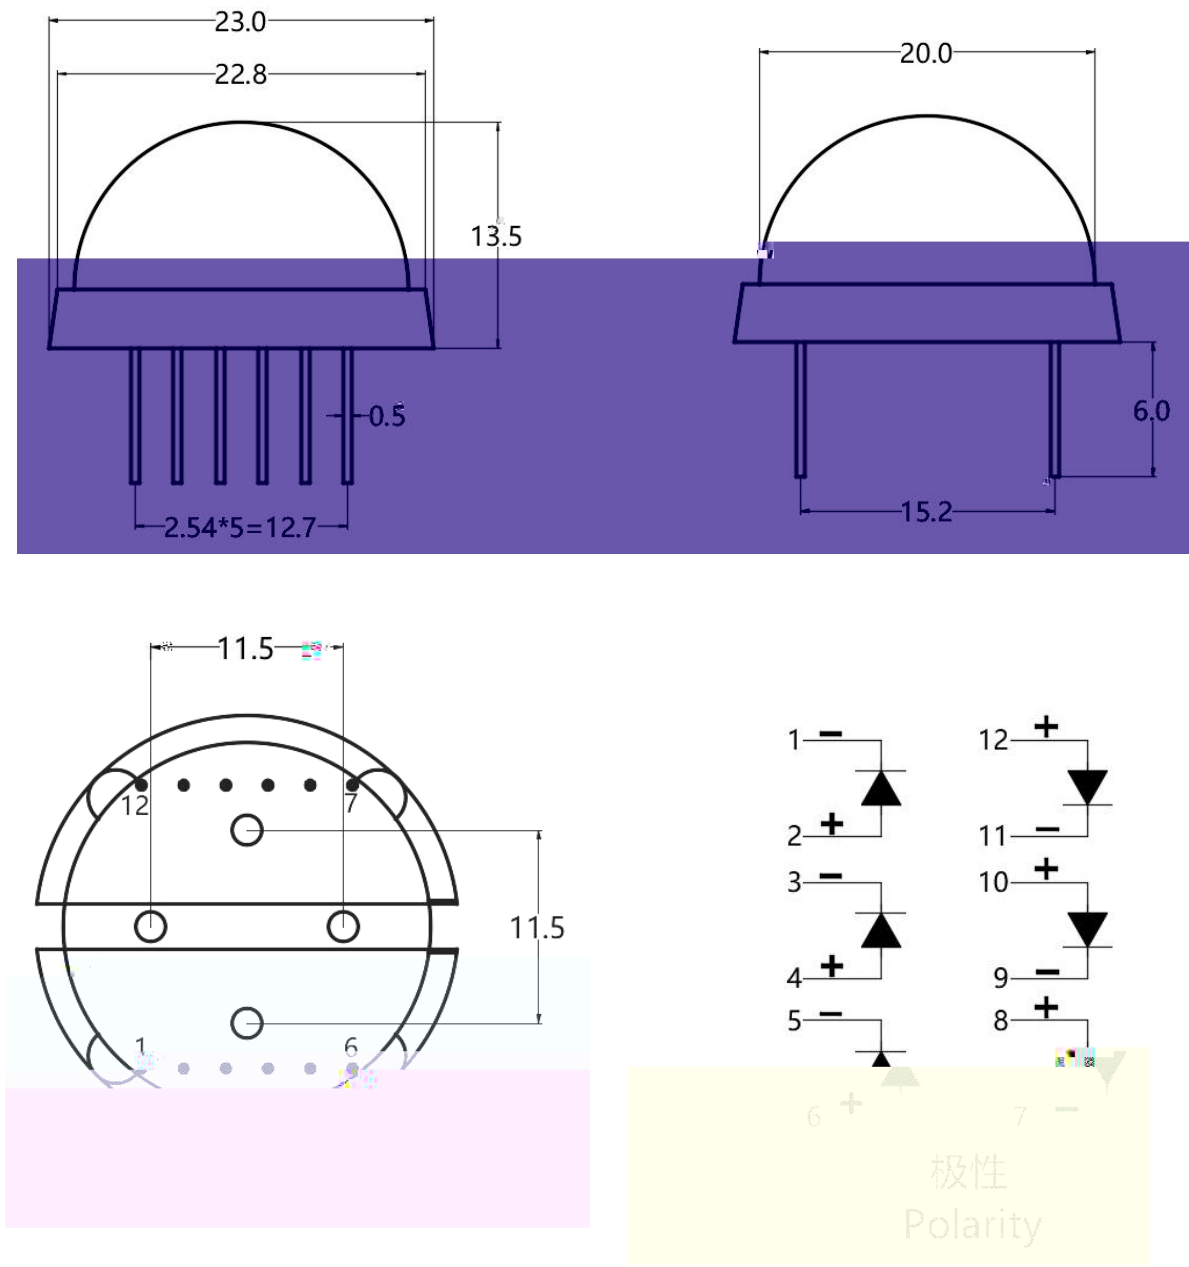


1.

2. mm .





包装

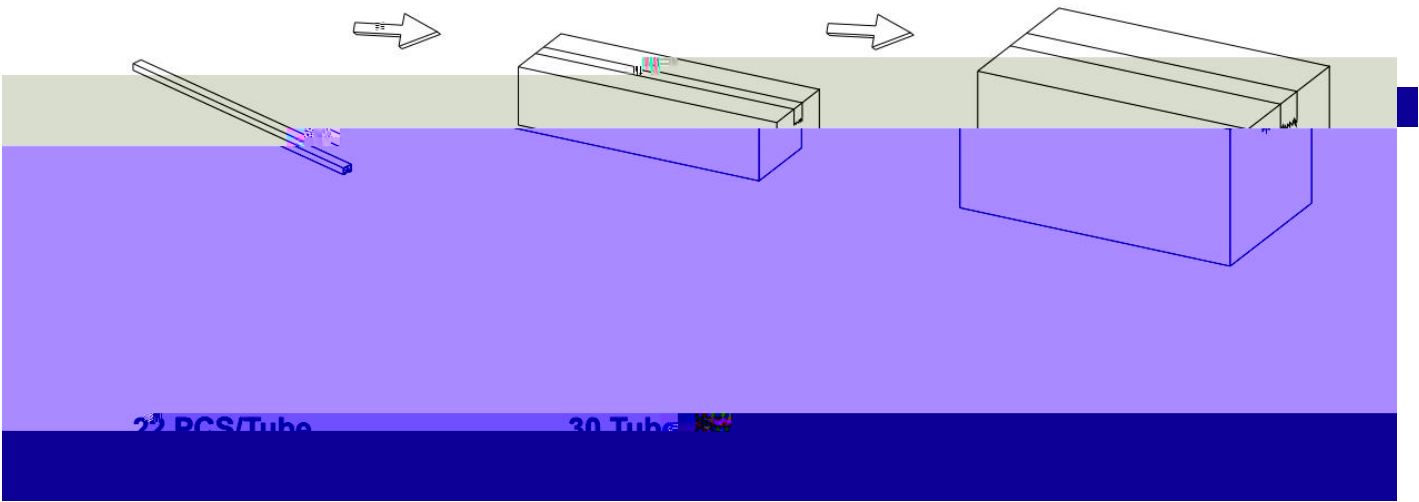


◇ 标签说明: Label Explantion

MPN: 型号	VF: 电压代码
WL: 波长代码	IV: 亮度代码
ORIGIN: 产地	QTY: 数量

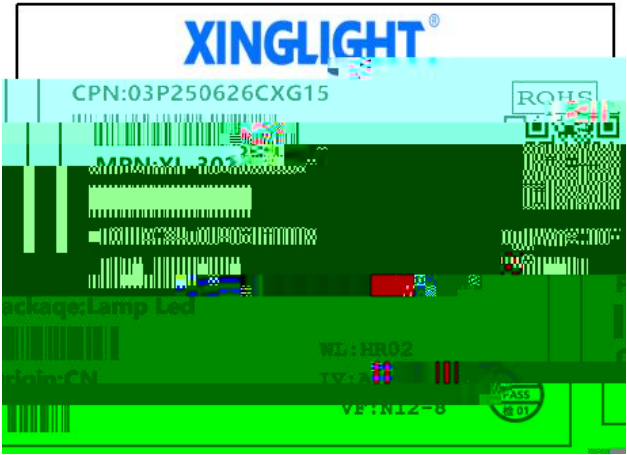

使用注意事項





使用注意事項 ()

(

8、其他事項：

*

*

