XINGLIGHT®

Part N

Part

亮度分档



可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	20mA Continuous lighting at the maximum rated current at room	1000 1000 hours -24 +72) -24hours +72hours	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
	High temperature and high humidity storage	IR-Reflow In-Board, 2 Times Ta= 85±5 , RH= 90 95%	240 240hours ± 2) ± 2hours)	MIL-STD-202F:103B JIS C 7021:B-11
	High-temperature storage	Ta= 85±5	1000 1000 hours -24 +72) -24hours+72hours	MIL-STD-883D:1008 JIS C 7021:B-10
	Low temperature	Ta= -40±5		JIS C 7021:B-12
	Cold and hot cycle	105 25 -55 25 30mins 5mins 30mins 5mins	100 100 Circles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1010
	Hot and cold impact	IR-Reflow In-Board, 2 Times 100± 5 -40 ± 5 20mins 20mins	100 100 Circles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1011
	Anti-tin test	T.sol= 260 ± 5	10 ± 1secs 2 2times	MIL-STD-202F:210A MIL-STD-750D:2031
Environmental testing	Infrared reflowwelding There is lead process	heat up speed(183) 3 / keep temperature 125(±25) 120 keep temperature 183 60-150 maximum temperature 235 +5/-0 keep 235 +5/-0 10-15 cooling rate 6 /	--------	MIL-STD-750D:2031.2 J-STD-020C
	Infrared reflow welding Lead-free process	heat up speed(217) 3 / keep temperature 175(±25) 180 keep temperature 217 60-120 maximum temperature 255 +0/-5 keep 255 +0/-5 5-10 cooling rate 6 /	--------	MIL-STD-750D:2031.2 J-STD-020C
	Weldability test	Soldering temperature T.sol= 235 ± 5 Immersion speed 25±2.5 mm/ 95% Tin loading Immersion time 2± rate ≥ 95% pad area Immersion time: 2 ± 0.5 seconds	0.5	MIL-STD-202F:208D MIL-STD-750D:2026 MIL-STD-883D:2003 IEC 68 Part 2-20 JIS C 7021:A-2

Part

包装（2）

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Anti-Electrostic Foil Bag

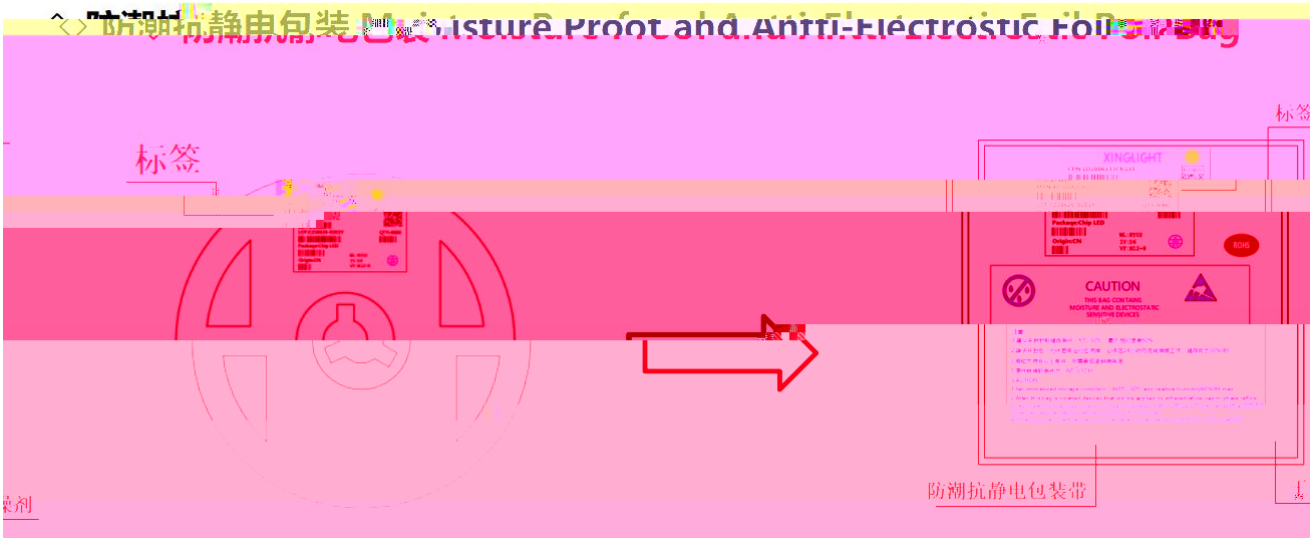

◇ 外包装箱 Cardboard Box

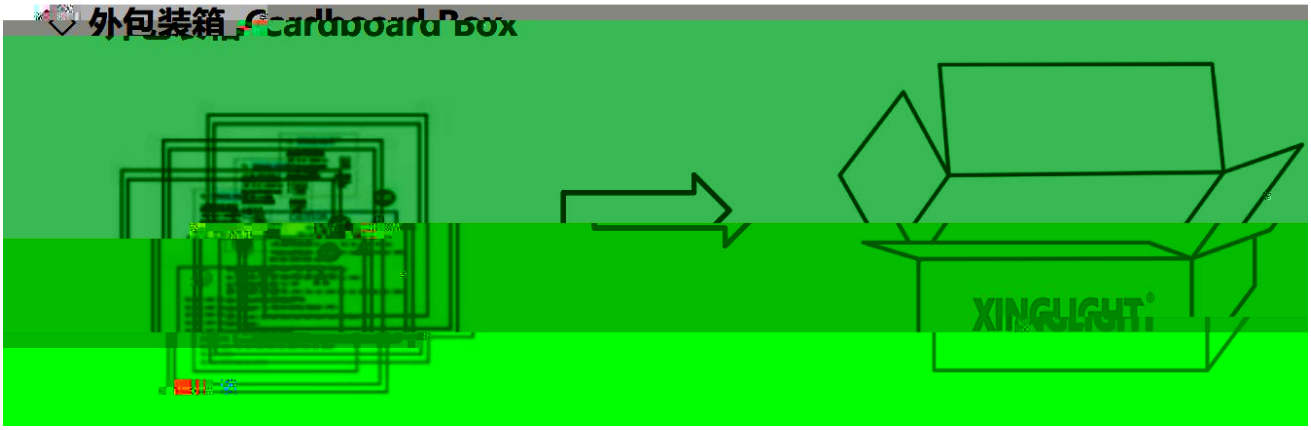

◇ 标签说明 Label Expantion

CPN：批号/料号　　LOT：日期/封装颜色

MPN：型号　　VF：电压代码

WL：波长代码　　IV：亮度代码

ORIGIN：产地　　QTY：数量

PACKAGE：

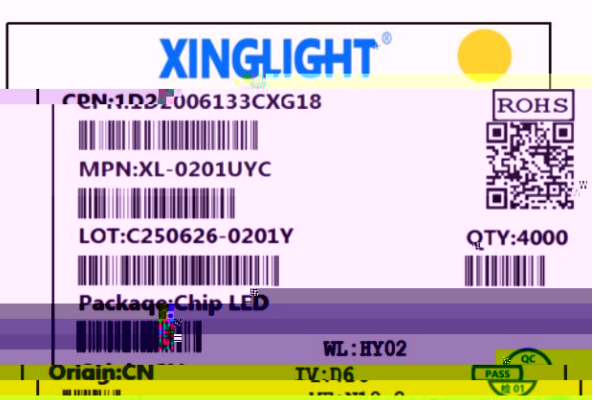

Part

Part

Ã%9‰