







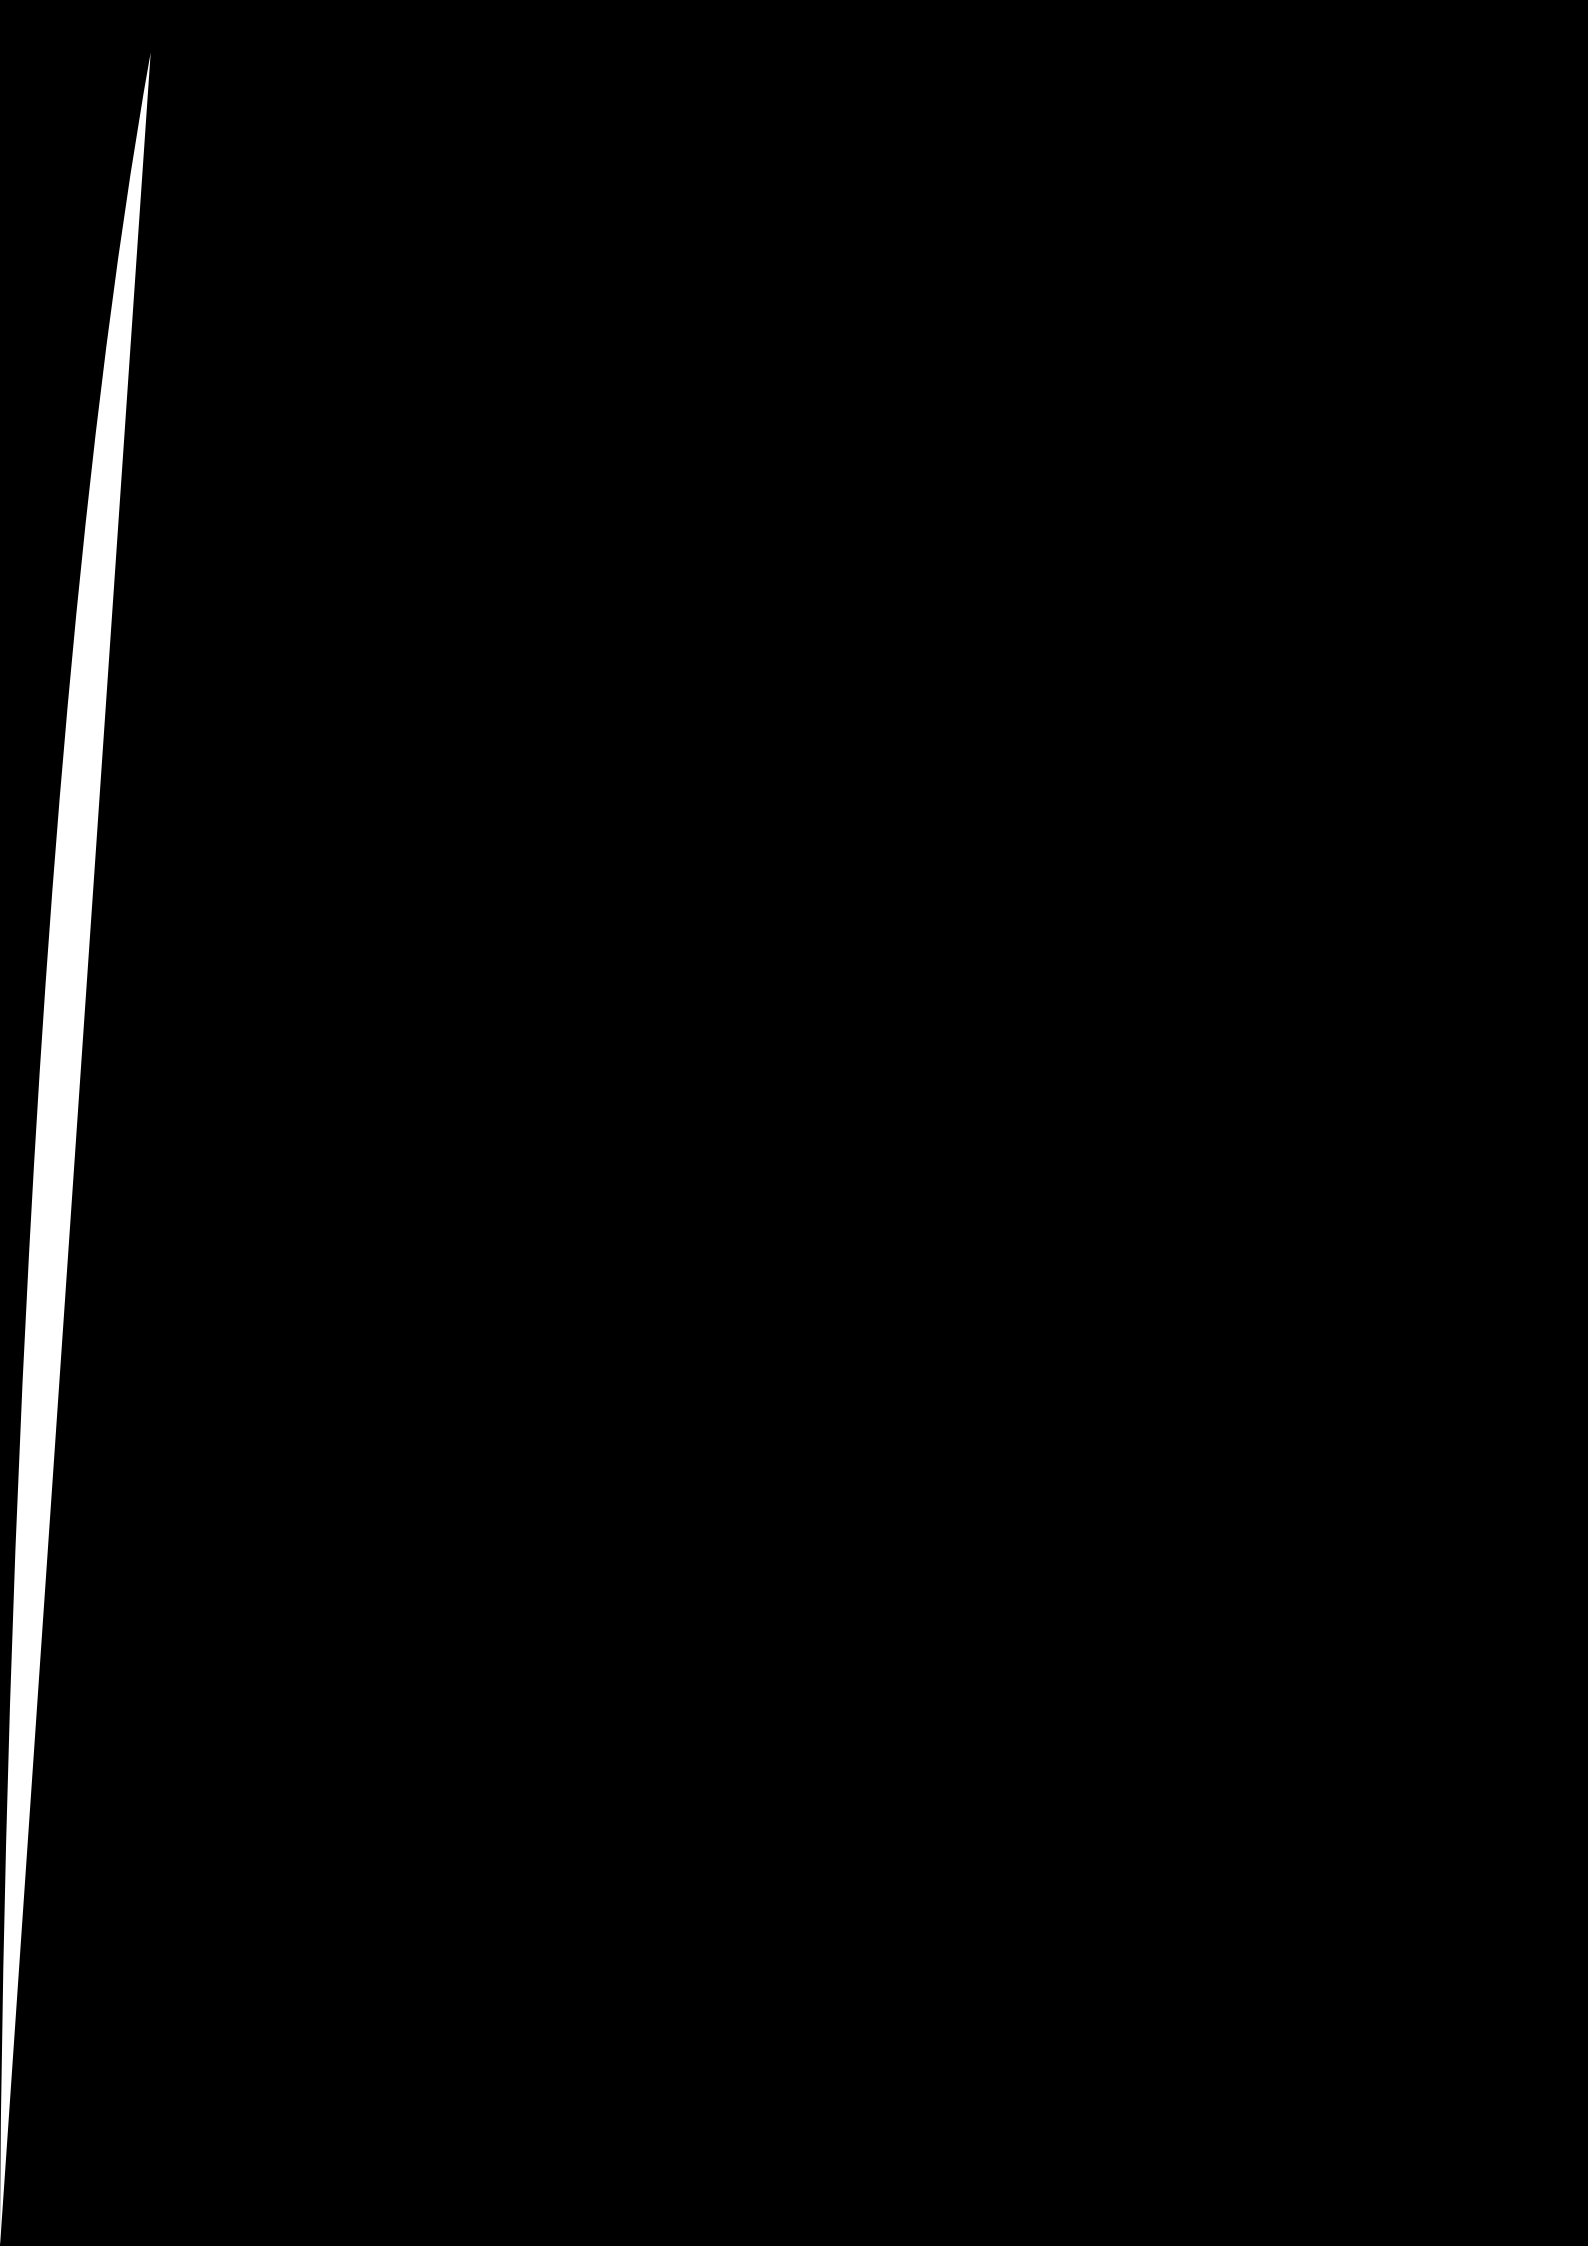

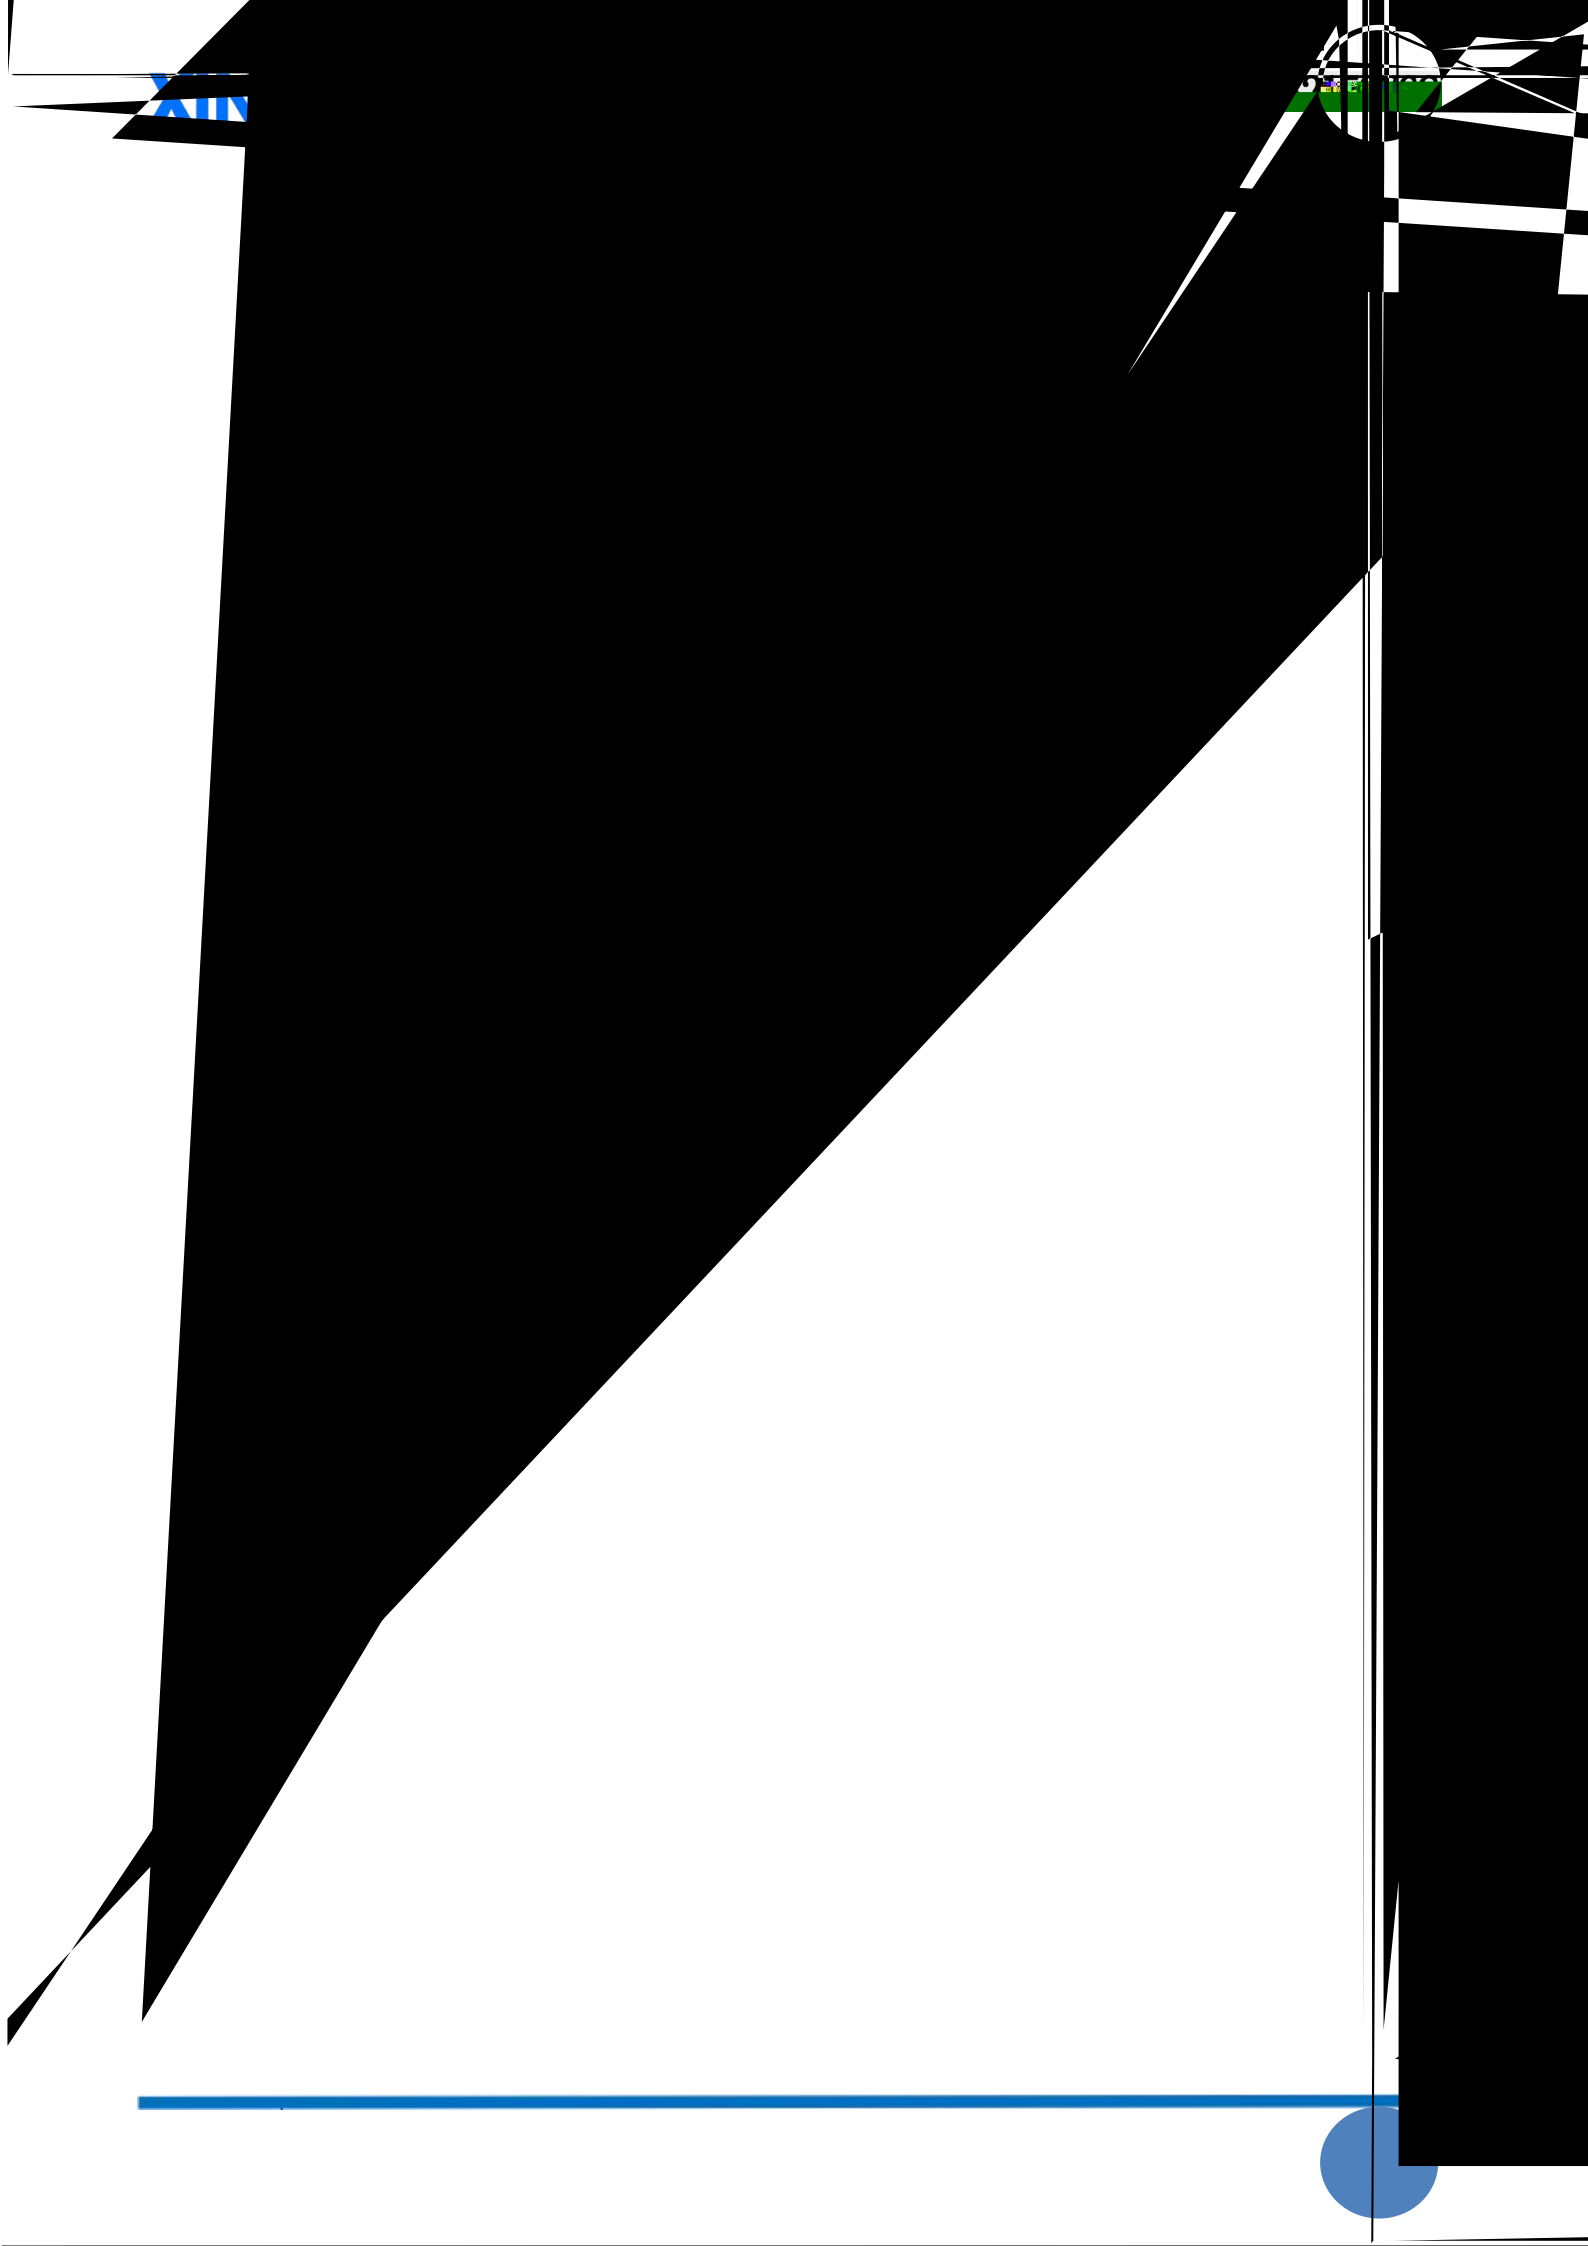

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Reference standard
Endurance test	Working life	20mA Continuous lighting at the maximum rated current at room	1000	1000 hours MIL-STD-750D:1026
			-24	+72 MIL-STD-883D:1005
			) -24hours	JIS C 7021:B-1
	High temperature and high humidity	IR-Reflow In-Board, 2 Times Ta= 85±5 , RH= 90 95%	240	240hours MIL-STD-202F:103B
			± 2) ± 2hours)	JIS C 7021:B-11
	High-temperature storage	Ta= 85±5	1000	1000 hours MIL-STD-883D:100;o
			-24 +72) -24hours+72hours	














使用注意事项（3）

Precautions (3)

4. 其他事项

Others

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

5. 眼睛保护忠告:

Safety Advice For Human Eyes

LED

LED

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

If there are any modifications to the specification sheet, no further notice will be given