

0805 红 贴片式 九二 管

[illegible]

应用领域 (Product application) :

~~CONFIDENTIAL~~

2. D



电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	50	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR		
Storage Temperature Range	TSTR		
/ Lead Soldering Temperature/Time	TSOL	260 ≤ 6S	/

≤

≤

≤

≤

光电参数

Ta=25 Optical-electrical parameter(ta=25)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test conditions
Luminous Intensity	Iv	80	/	120	mcd	IF=20mA
Dominant Wave Length	λ d	620	/	625	nm	IF=20mA
Peak Wave Length	λ p	/	630	/	nm	IF=20mA
Forward Voltage	VF	1.9	/	2.1	V	IF=20mA
Viewing Angle	2θ1/2	/	120 °	/	deg	IF=20mA
Half wave width		/	20	/	nm	IF=20mA
Reverse Current	IR	/	/	≤1	μ A	VR=5V






包装 (1)


Packaging (1)

图 5 带盘尺寸 Belt and disk dimensions

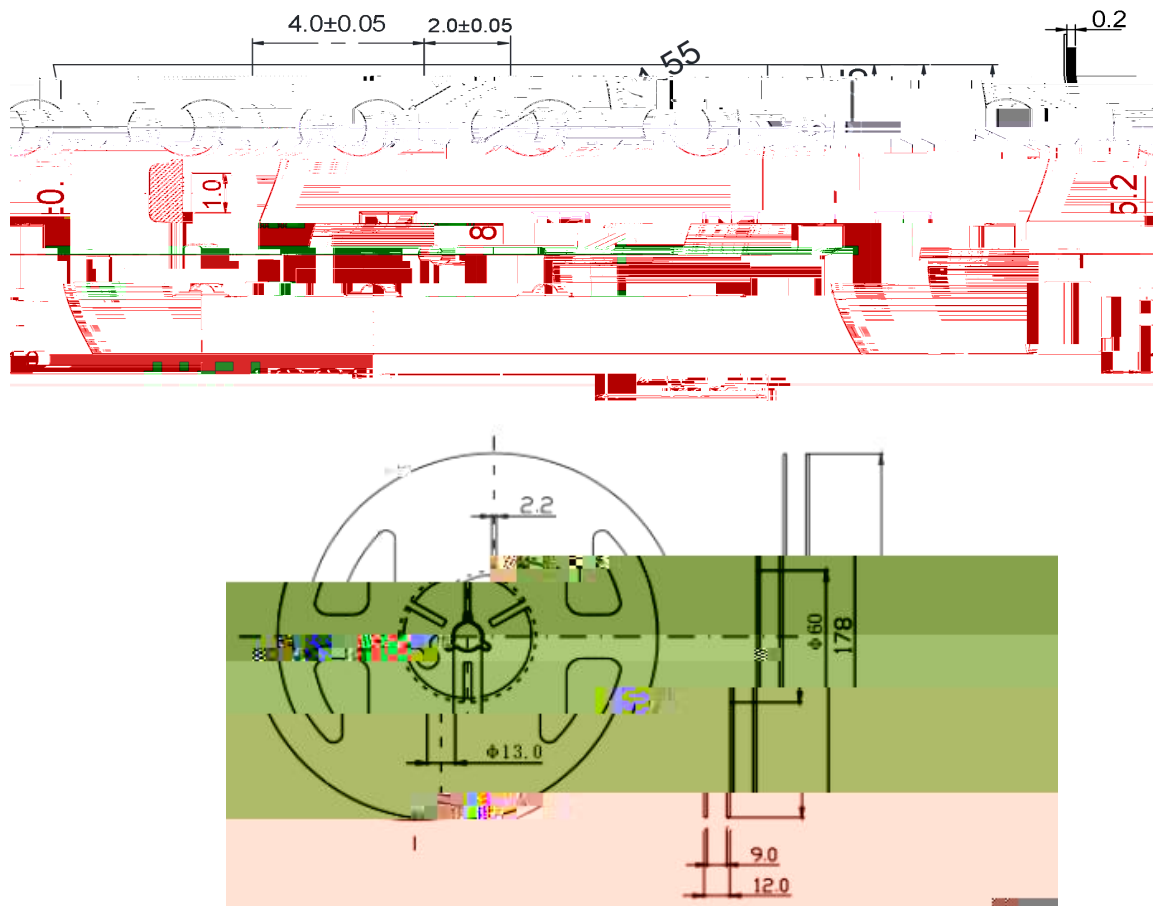

2.

图 6 盘及载带卷出方向及空穴规格 Disk and carrier belt direction of roll

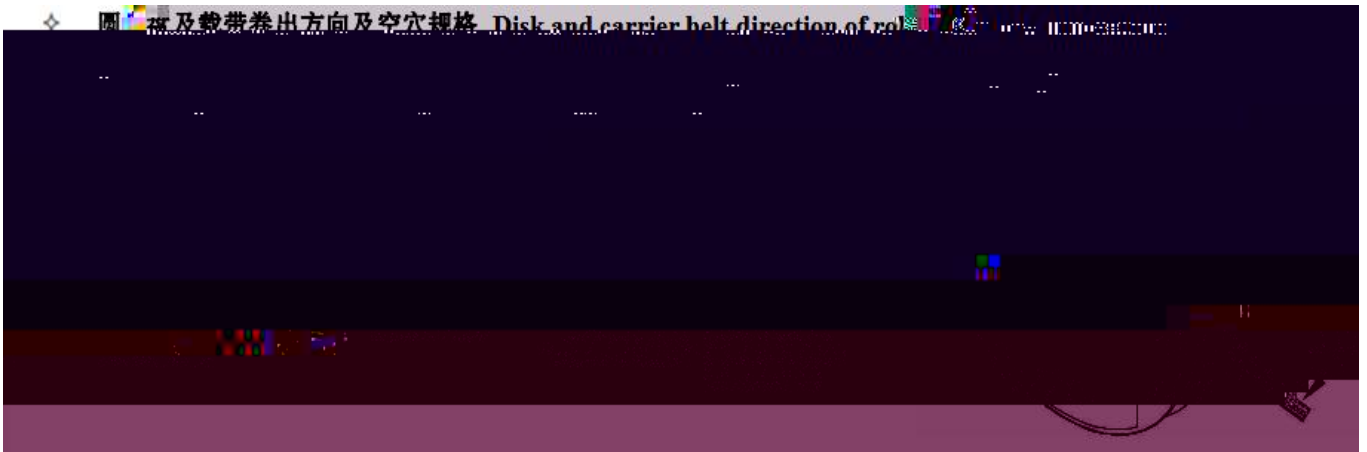








使用注意事项（2）

Precautions (2)

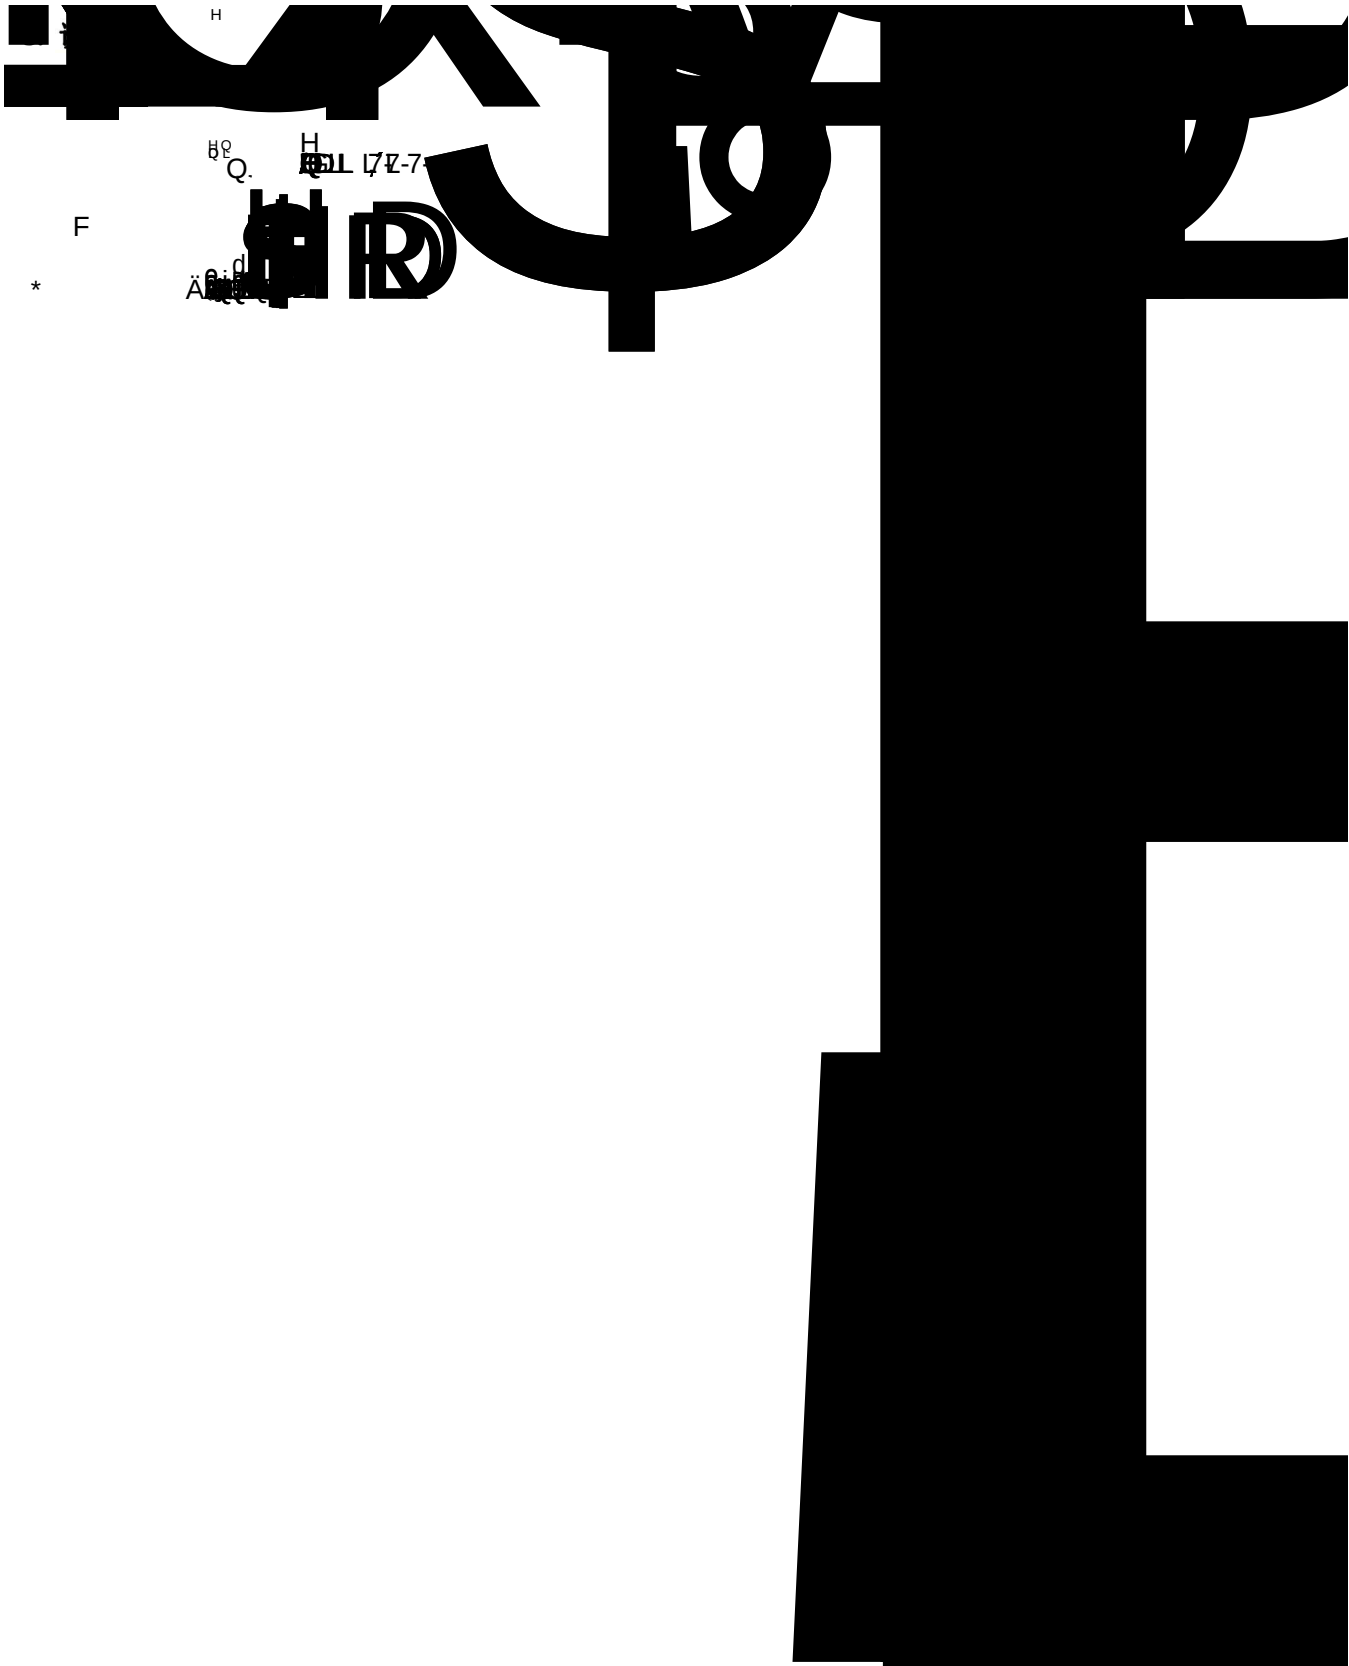

使用注意事项

Precautions (3)

4. 其他

Others