

Part No. :XL-5050RGC-A



Ta=25Ñ ! öüŸúŞ a łŸΨŸΨ włúΩ° (ta=25 Ñ)




Consumed power	Pd	R	50	mW
		G	70	
		B	70	
Peak Forward current	IFP	R	80	mA
		G	80	
		B	80	
Forward working current	IF	R	20	mA
		G	20	
		B	20	
Reverse voltage	VR	R	5	V
		G	5	
		B	5	
Antistatic ability	9{5	2000	1000	1000

Part No. :XL-5050RGC-A

Part No. :XL-5050RGC-A

典型特性曲线

Typical Characteristics Curves

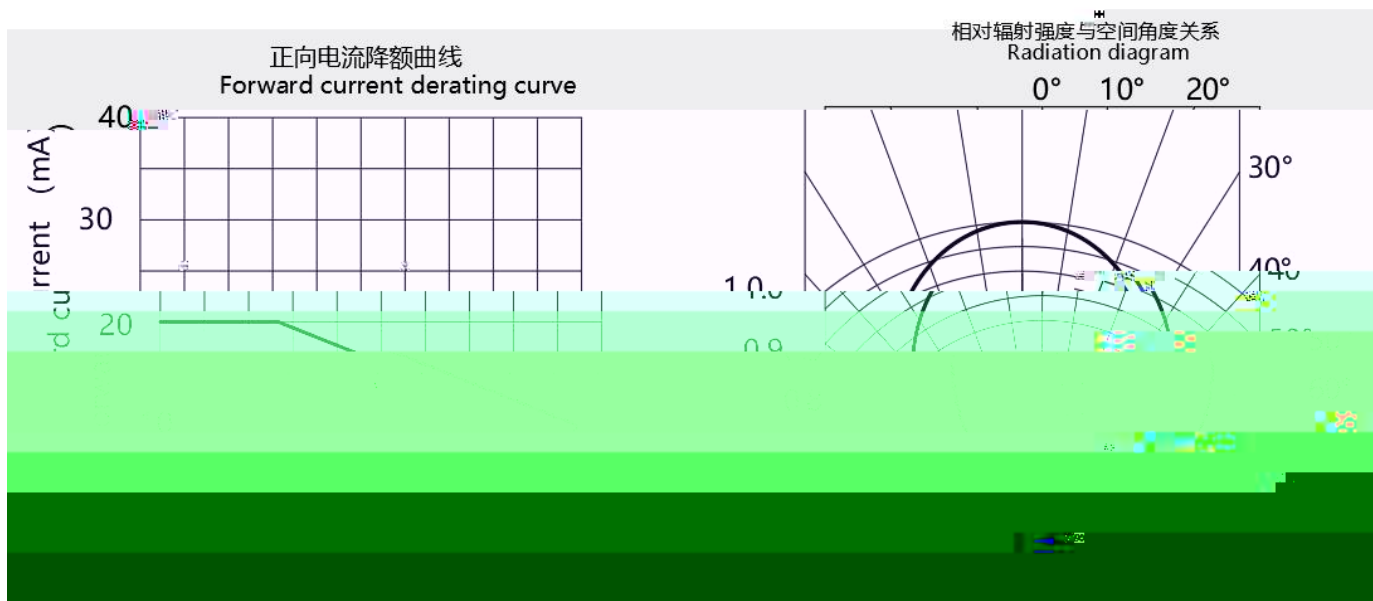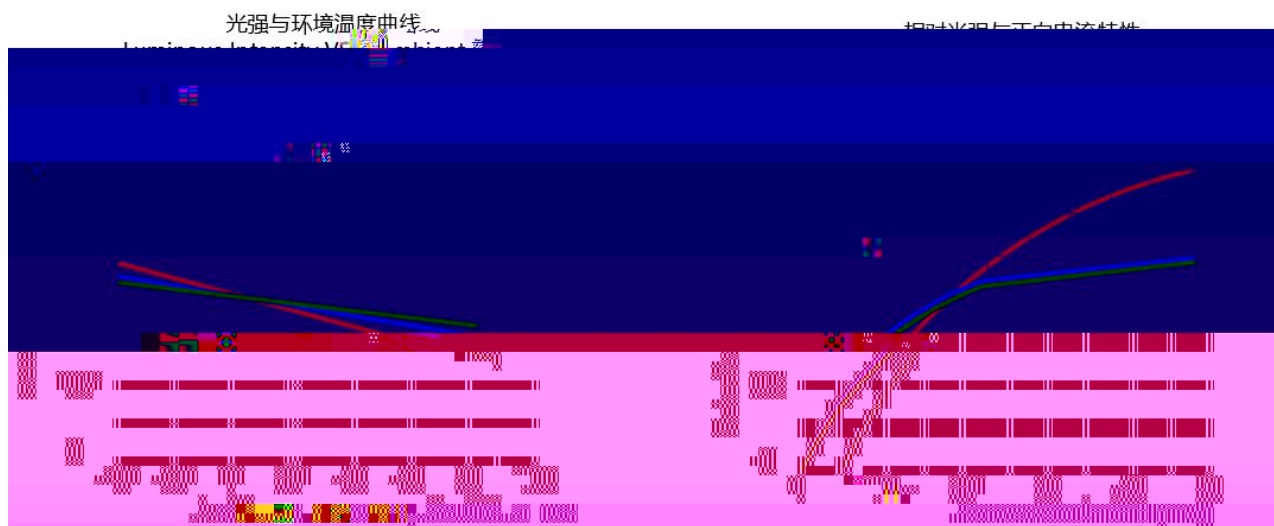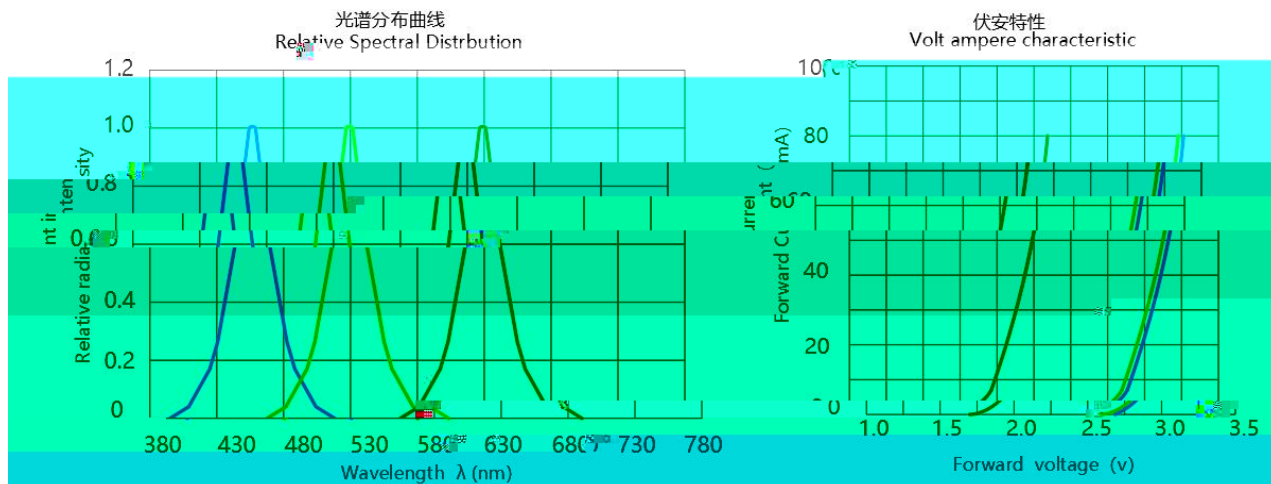











XINGLIGHT

XPB

YB

Part No. :XL-5050RGC-A



