





电性参数

Ta=25 Absolute Maximum Rating(ta=25)



Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	70	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR		
Storage Temperature Range	TSTR		
/ Lead Soldering Temperature/Time	T*g		

光电参数 Ta=25 Optical-electrical parameter(ta=25)



典型特性曲线

Typical Characteristics Curves

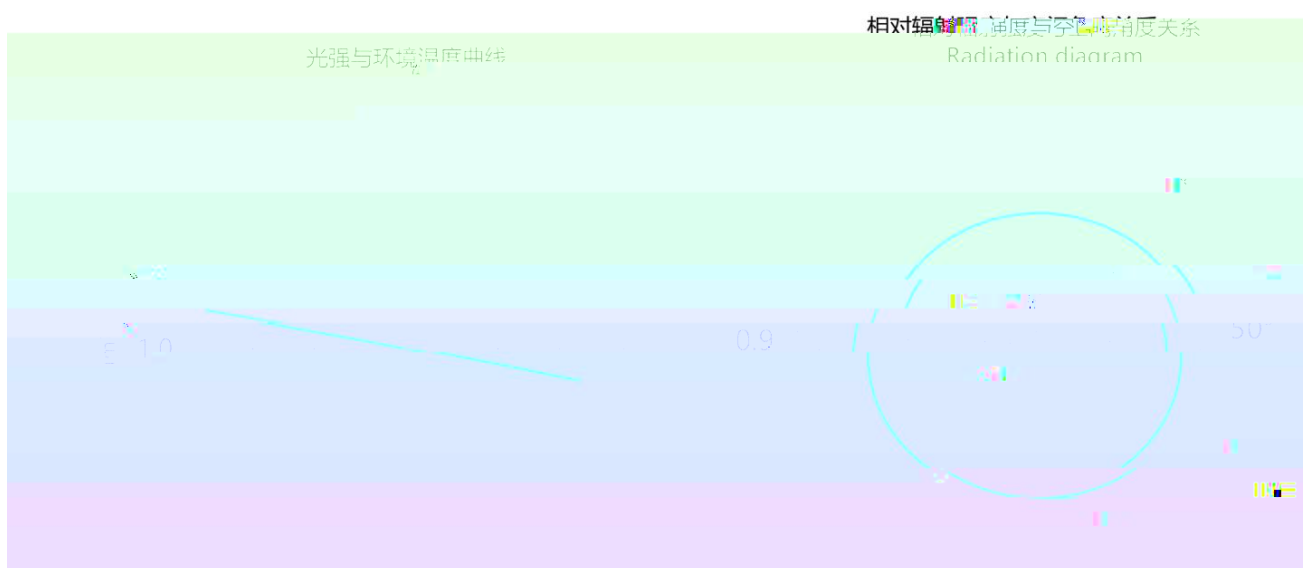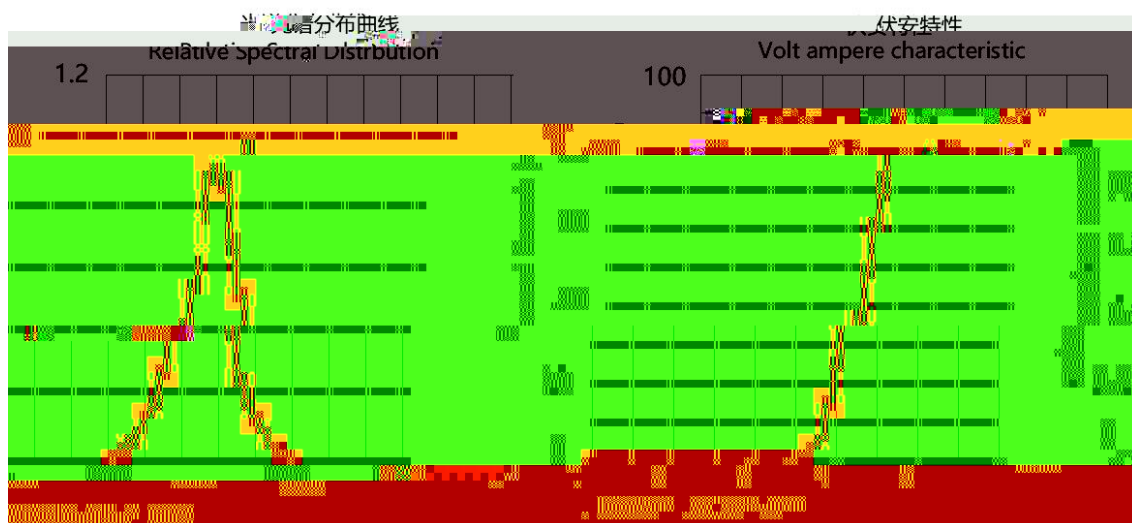





±

±



外形尺寸

Outline Dimension

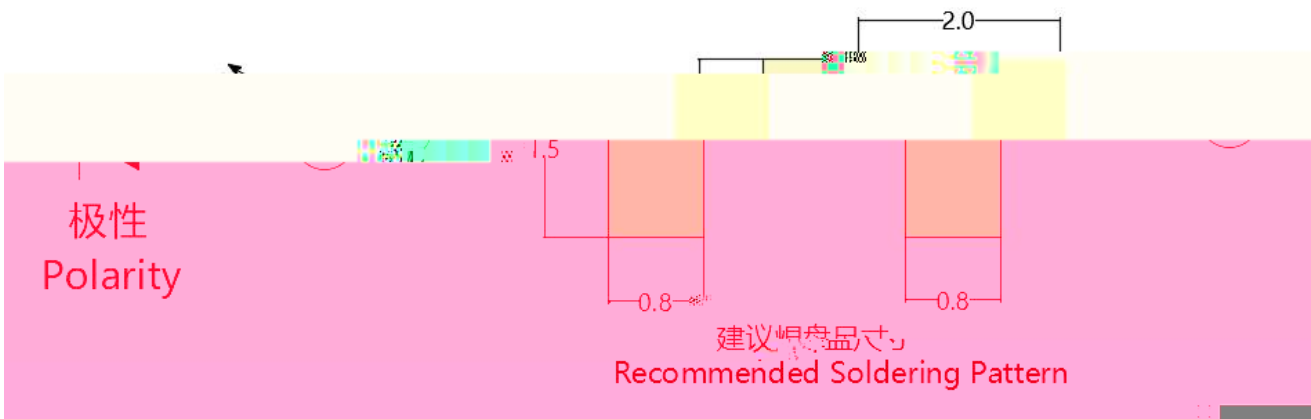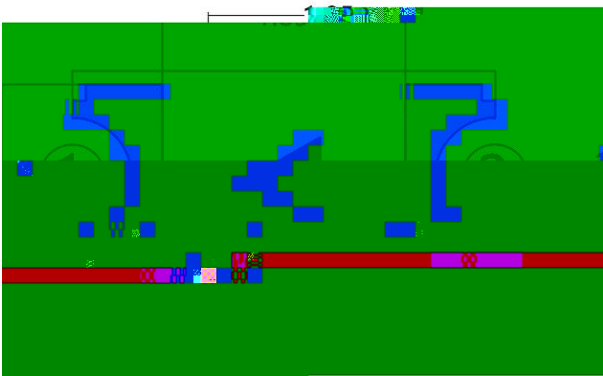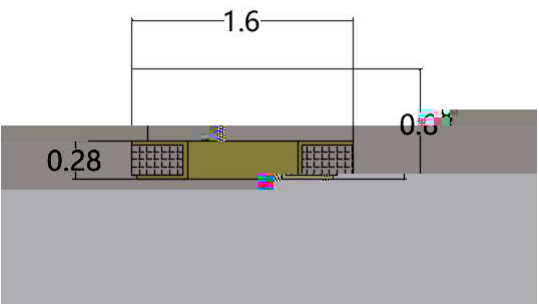
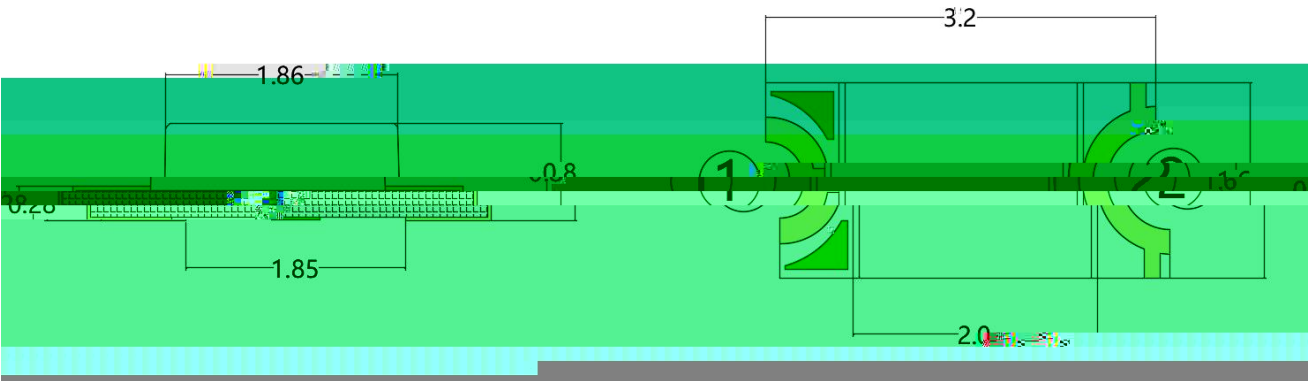


- Remarks:
- 1. mm
 - 2. $\pm 0.25\text{mm}$


包装 (1)

Packaging (1)

载带与圆盘尺寸 Belt and disk dimensions

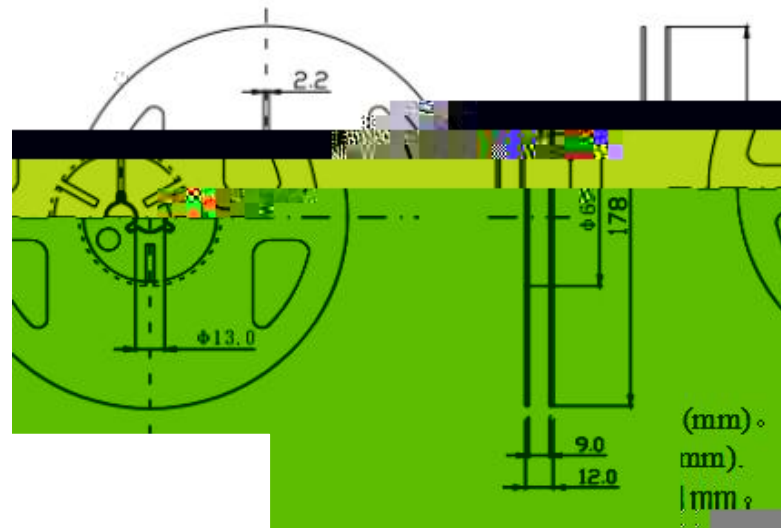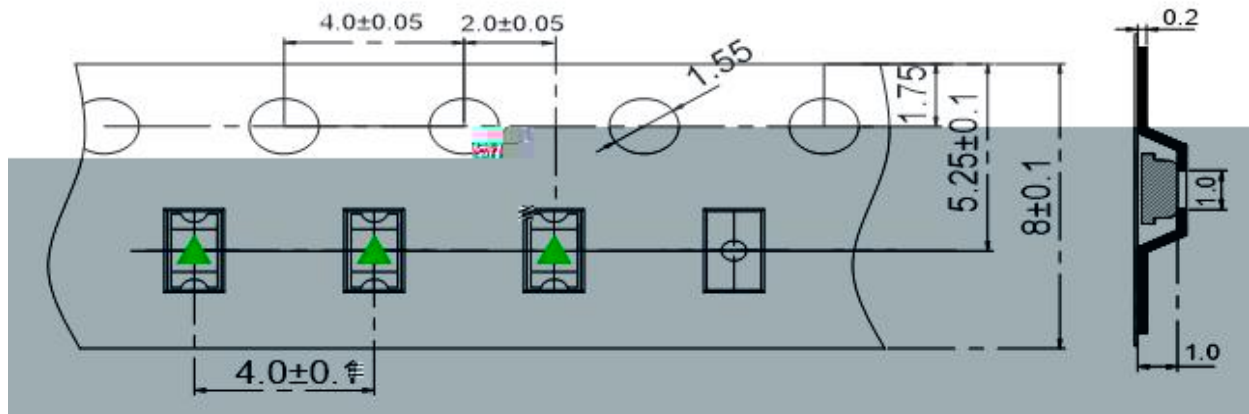

2.

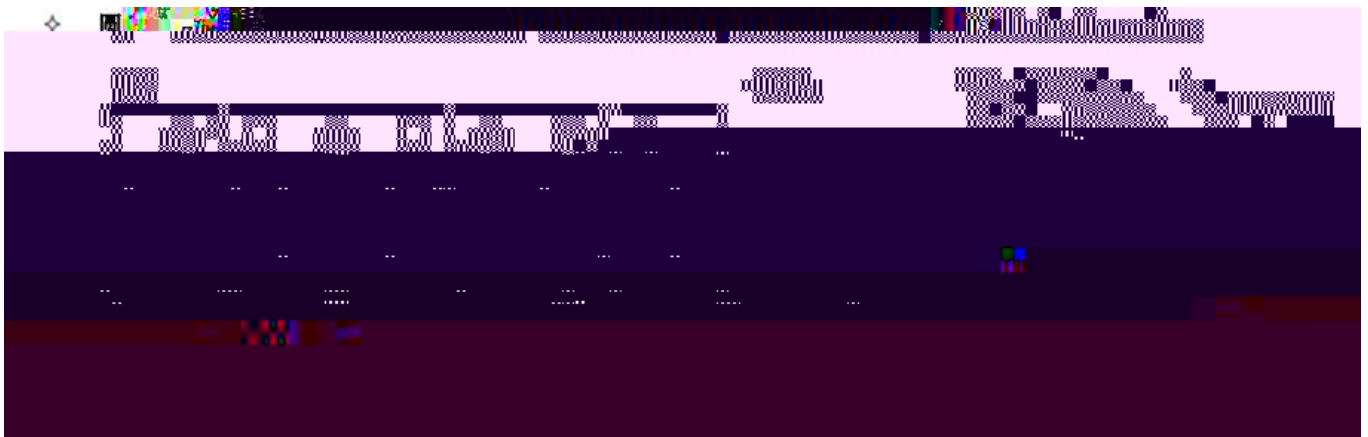



使用注意事项 (2)

Precautions (2)

3. 设计

Design Consideration

