






电性参数

Ta=25℃ Absolute Maximum Rating(ta=25℃)

Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	75	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR	-40 ~ +85 C	℃
Storage Temperature Range	TSTR	-40 ~ +85 C	℃
/ Lead Soldering Temperature/Time	TSOL	260℃ ±6S	/

* 0.1ms 1/10 * Note: Pulse width 0.1ms, Duty 1/10

光电参数 Ta=25℃ Optical-electrical parameter(ta=25℃)

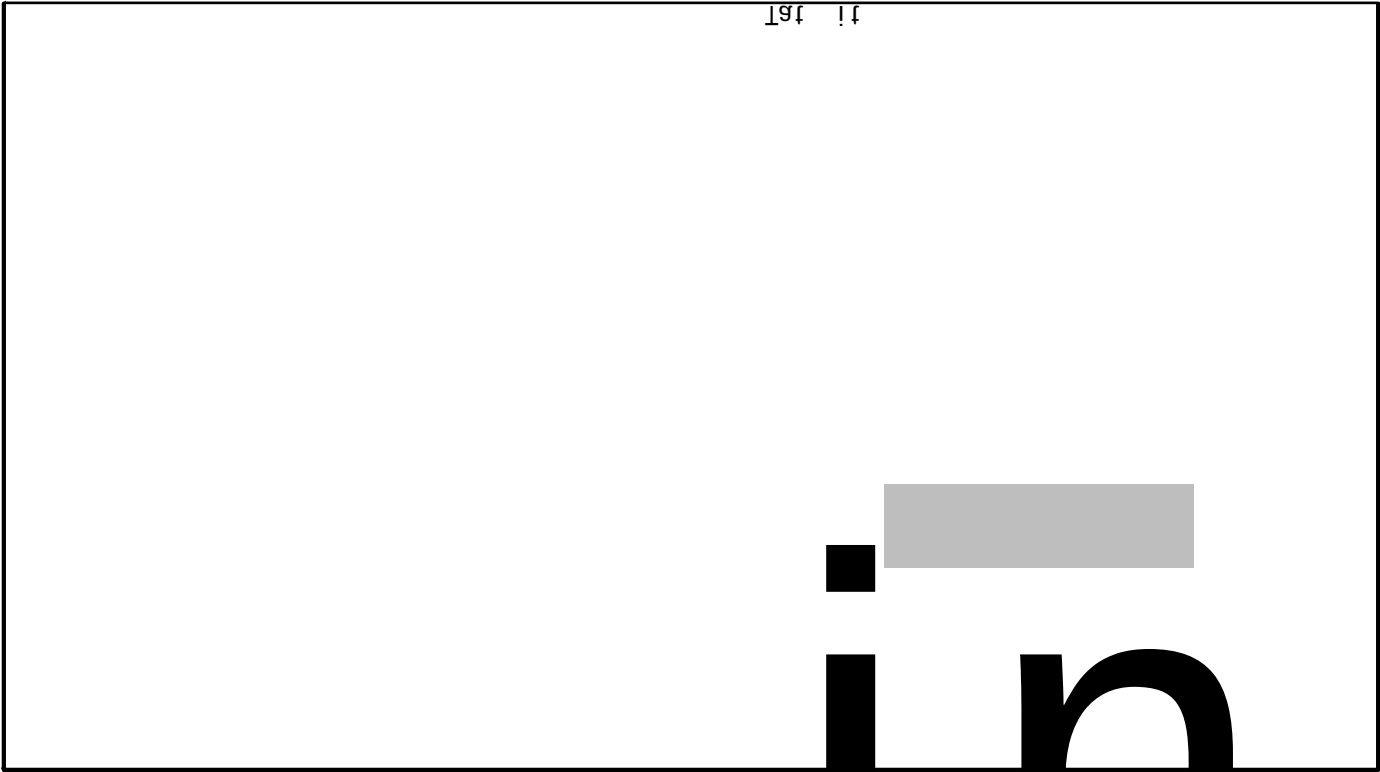



可靠性试验

Rehabilit Test Items And Conditions

Class	Test item	Testing environment	Testing time	Reference standard
-------	-----------	---------------------	--------------	--------------------


Working life	20mA	Continuous lighting at the maximum rated current at		
--------------	------	---	--	--

Endurance test




Packaging (1)

載帶與圓盤尺寸

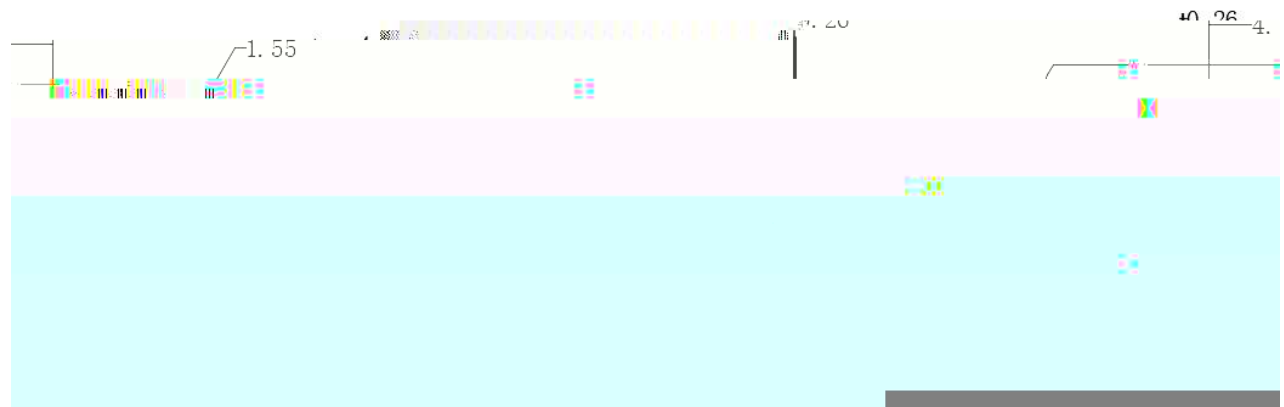


1. (mm) mm
1. Size unit is mm (mm).
2. $\pm 0.1\text{mm}$ mm
2. The dimensional tolerance is $\pm 0.1\text{mm}$.

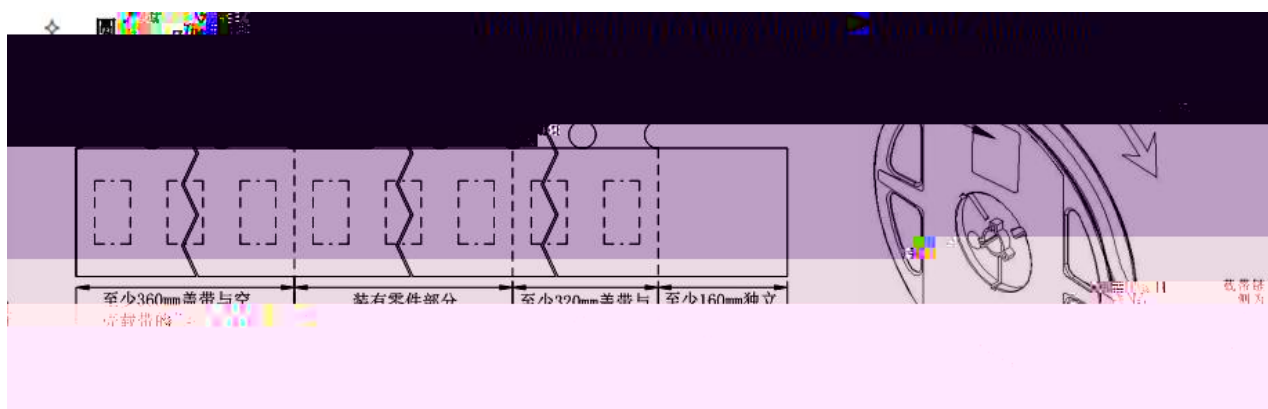

包装 (2)

Packaging (2)


◇ 防潮防静电包装 Moisture Proof and Anti-Static Packaging

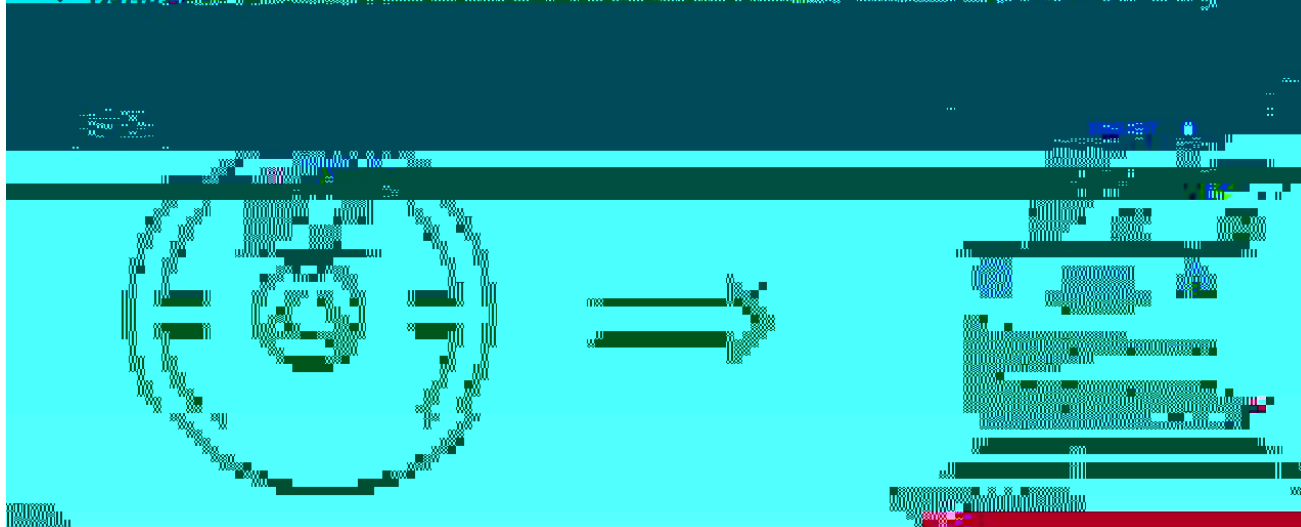

◇ 防静电包装 ESD Protection



◇ 标签说明 Label Expansion

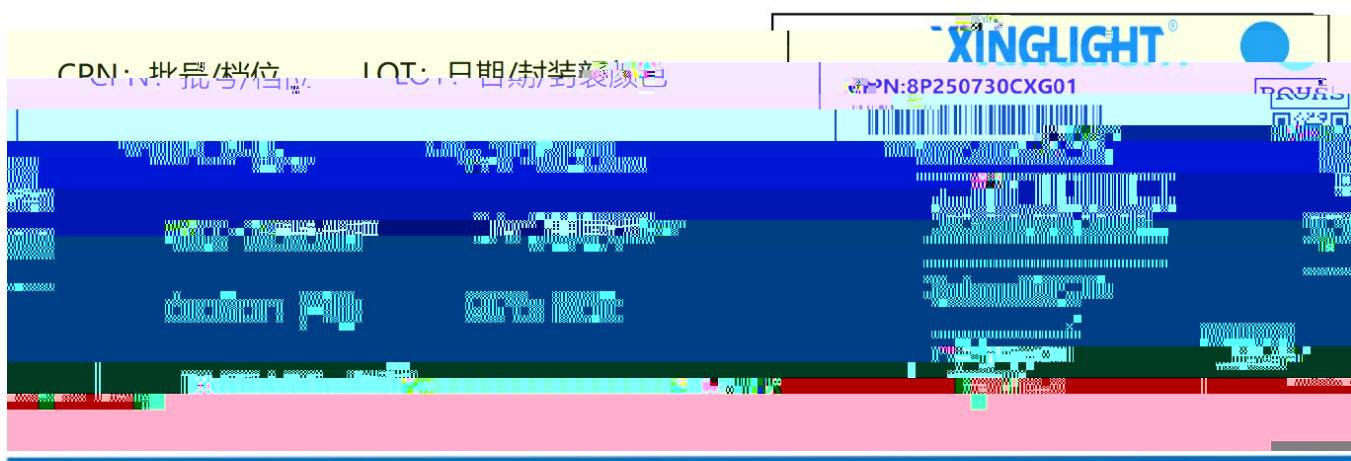






KINGLIGHT®



使用注意事项（2）

Precautions (2)

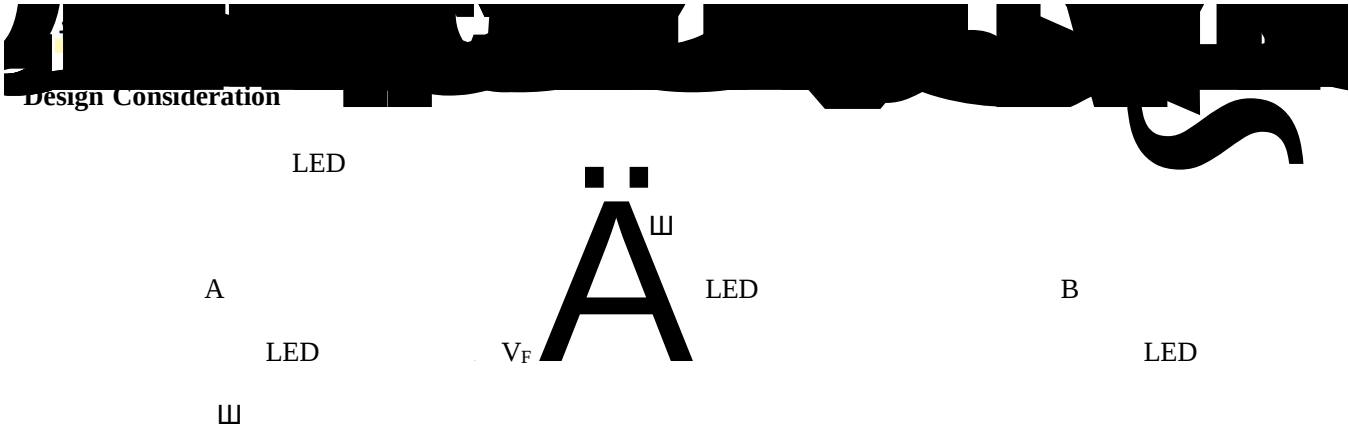

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified

