# 典型特性曲线

## Typical Characteristics Curves

光谱分布曲线
Relative Spectral Distrbution

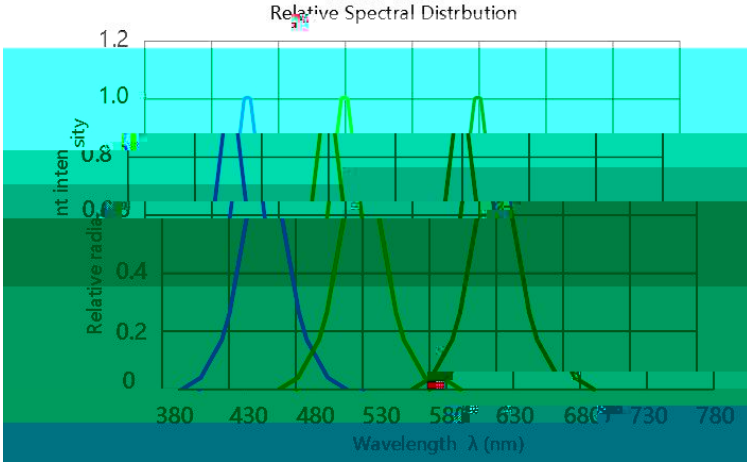


伏安特性
Volt ampere characteristic

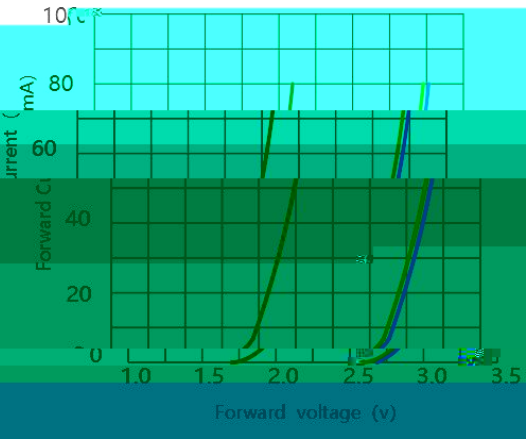


光强与环境温度曲线

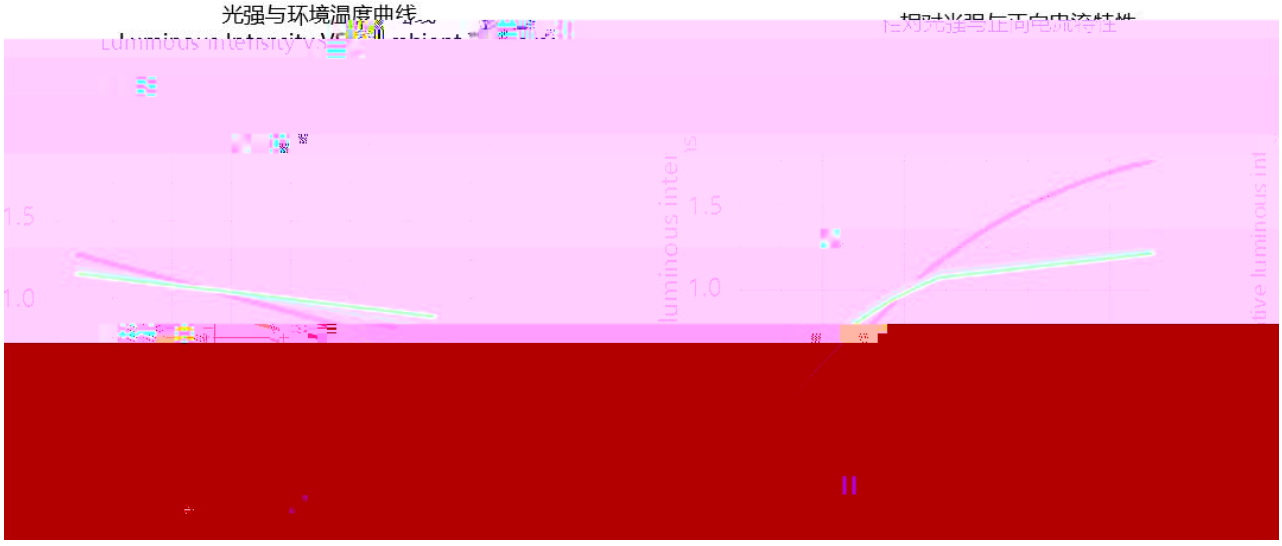

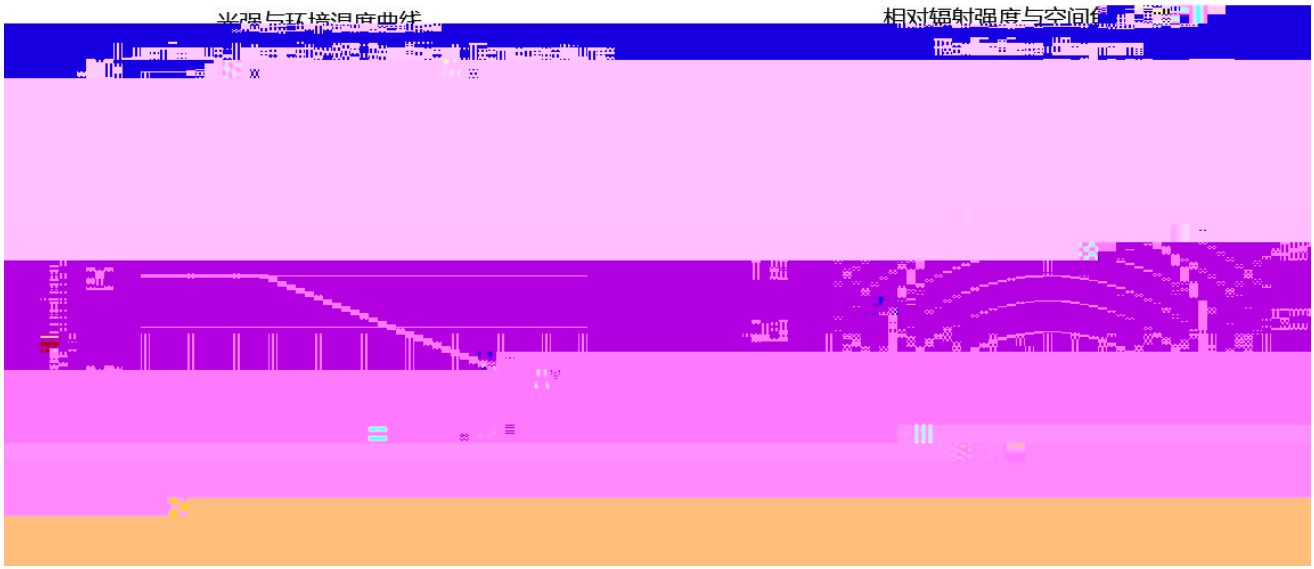

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

# 外形尺寸
## Outline Dimension

Remarks: 1. All dimensions are in mm

## 使用注意事项（2）

## Precautions (2)

设计建

LED

A LED B

LED $V_F$ LED

Y"q8" y -

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A, which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current