



目录

电性参数

典型特性曲线

可靠性实验


外形尺寸

包装







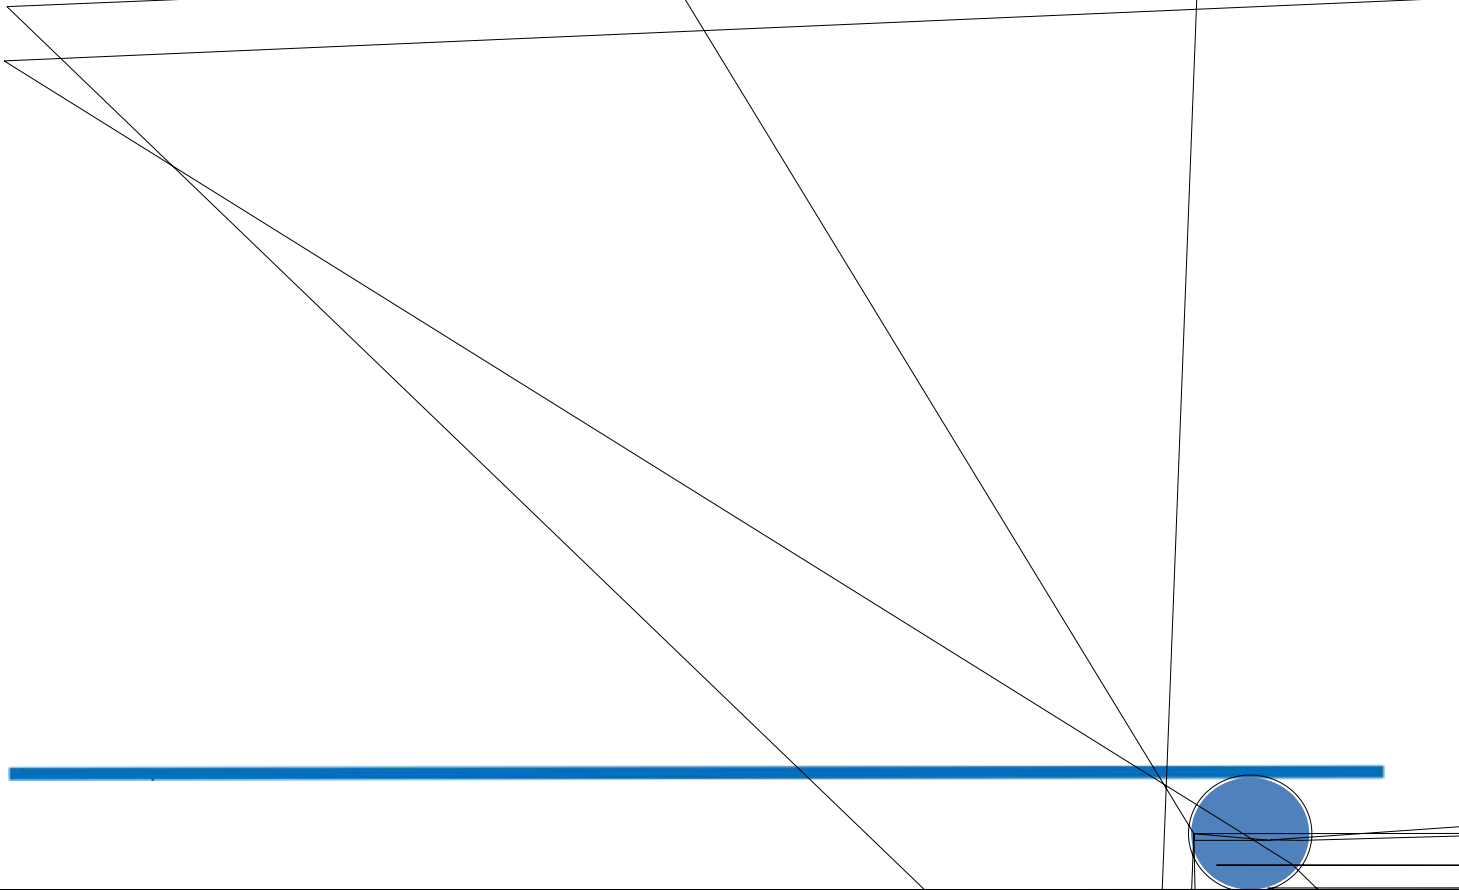

可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	γ 20mA	Continuous lighting at the maximum rated current at room	1000 -24 -24hours	1000 +72 +7	STD-750D:1026 STD-883D:1005 C 7021:B-1
	High temperature and high humidity	IR-Reflow In-Board, 2 Times Ta= 85±5 , RH= 90 95%		240 ± 2 2hours)	240	STD-202F:103B C 7021:B-11
	High-temperature storage	Ta= 85±5		1000 -24	1000 +72	STD-883D:1008 C 7021:B-10
	Low temperature	Ta= -40±5		-24hours	+72	C 7021:B-12
	Cold and hot cycle	105	Ü	я		

Environmental testing	tembers		ST!!		STD:B' ij	

Q 6

M

2













