






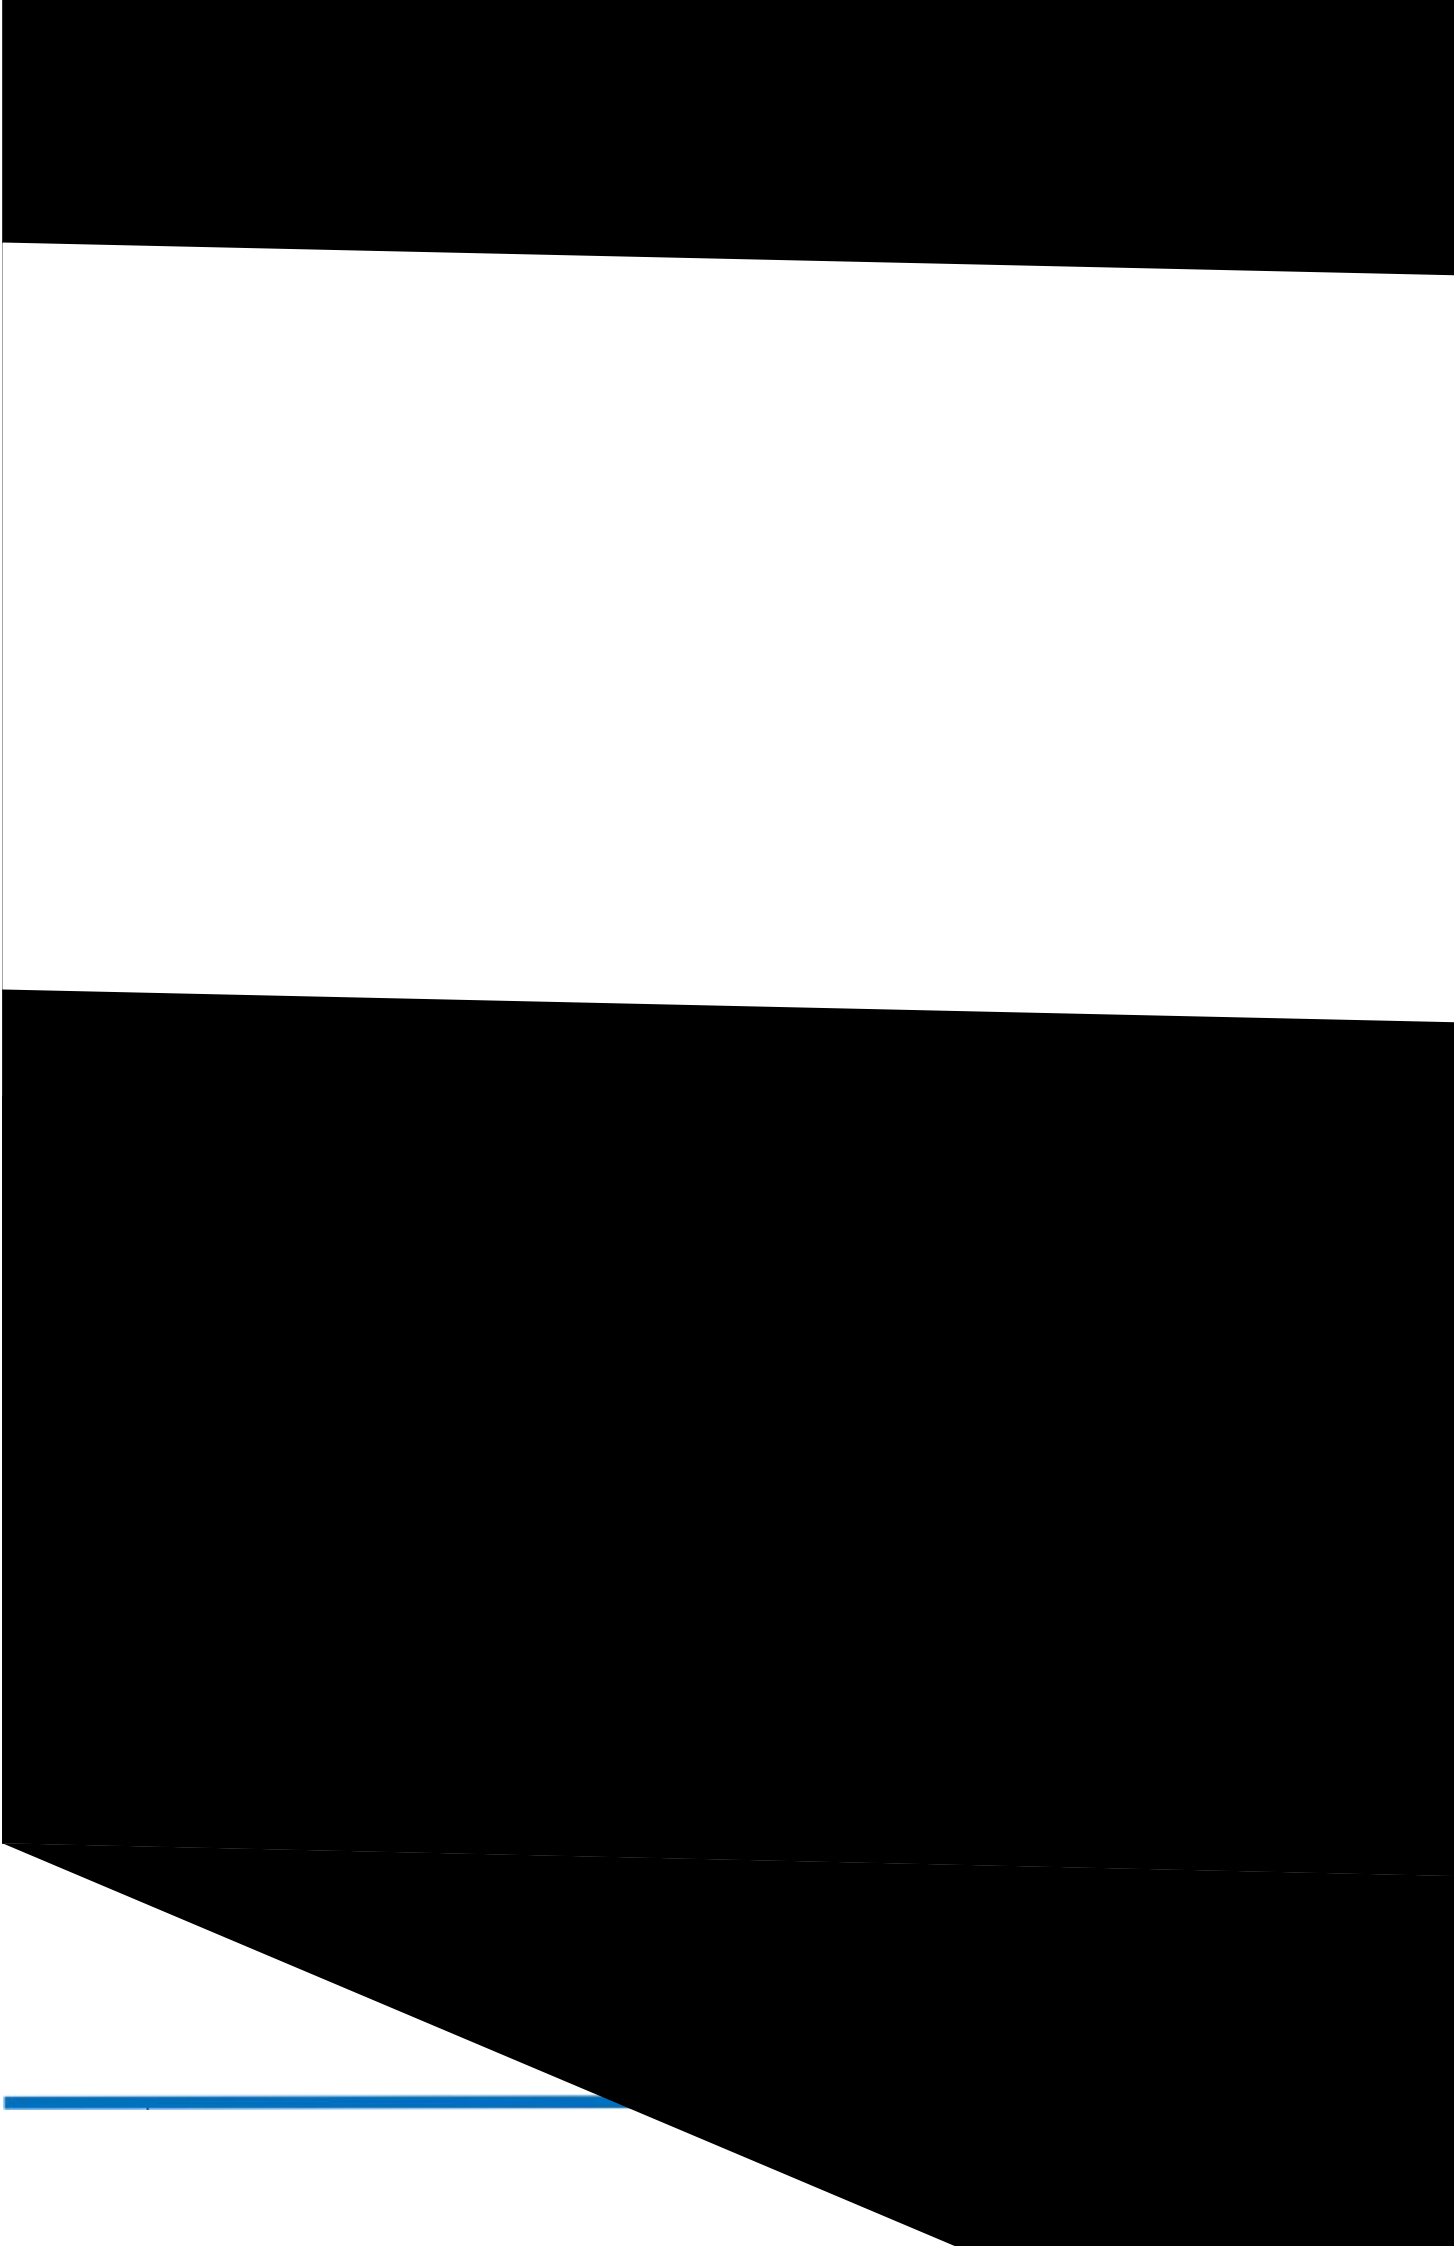

亮度分档

代码	最小值	最大值	单位	测试条件
D2	80	120	mcd	IF=20mA
D3	120	150		
D4	150	180		
D5	180	210		
D6	210	240		
E3	450	500		
E4	500	550		
E5	550	600		
E6	600	700		
E7	700	800		

±10% Brightness error±10%

电压分档

代码	最小值	最大值	单位	测试条件
N11-4	1.9	2.1	V	IF=20mA
N11-5	2.1	2.3		
N13-2	2.6	2.8		
N13-3	2.8	3.0		
N11-8	2.7	2.9		
N11-9	2.9	3.1		

±0.1V Voltage error±0.1V

波长分档

Wavelength grading:

代码	最小值	最大值	单位	测试条件
HR02	620	625	nm	IF=20mA
HB04	460	465		
HB05	465	470		
HG03	520	525		
HG04	525	530		
HG05	530	535		

±1nm Wavelength error±1nm

The testing conditions vary for different appli cation areas











Packaging (1)




continued discussion

A



© 2007 by The McGraw-Hill Companies, Inc.



171

