








色区分档



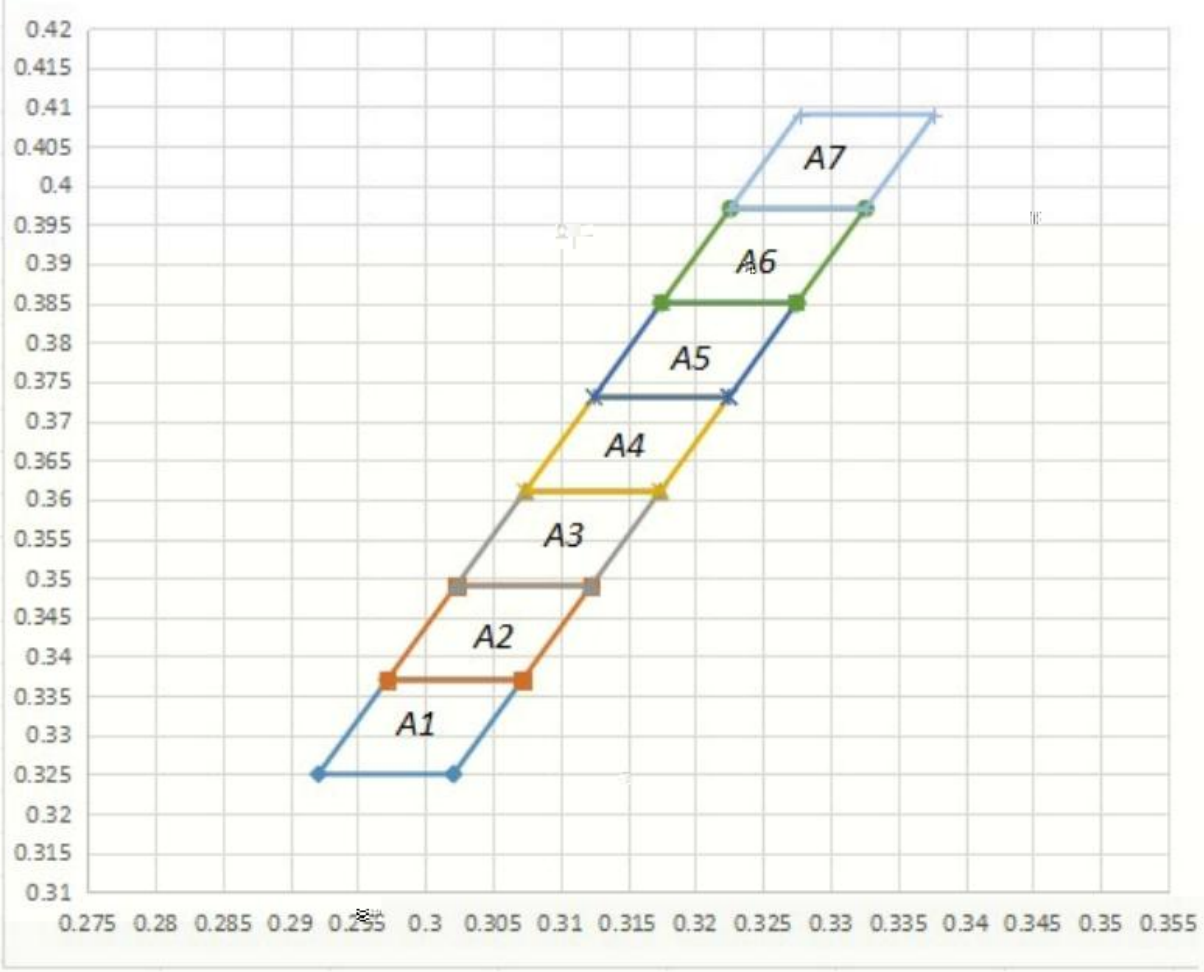


色区代码	C1:X1	C1:Y1	C1:X2	C1:Y2	C1:X3	C1:Y3	C1:X4	C1:Y4
A1	0.3021	0.325	0.2921	0.325	0.2972	0.337	0.3072	0.337
A2	0.3072	0.337	0.2972	0.337	0.3023	0.349	0.3123	0.349
A3	0.3123	0.349	0.3023	0.349	0.3074	0.361	0.3174	0.361
A4	0.3174	0.361	0.3074	0.361	0.3025	0.373	0.3225	0.373
A5	0.3225	0.373	0.3175	0.373	0.3126	0.385	0.3326	0.385
A6	0.3275	0.385	0.3175	0.385	0.3226	0.397	0.3326	0.397
A7	0.3326	0.397	0.3226	0.397	0.3277	0.409	0.3377	0.409

XY ±0.01 XY coordinate error ± 0.01

典型特性曲线

Typical Characteristics Curves

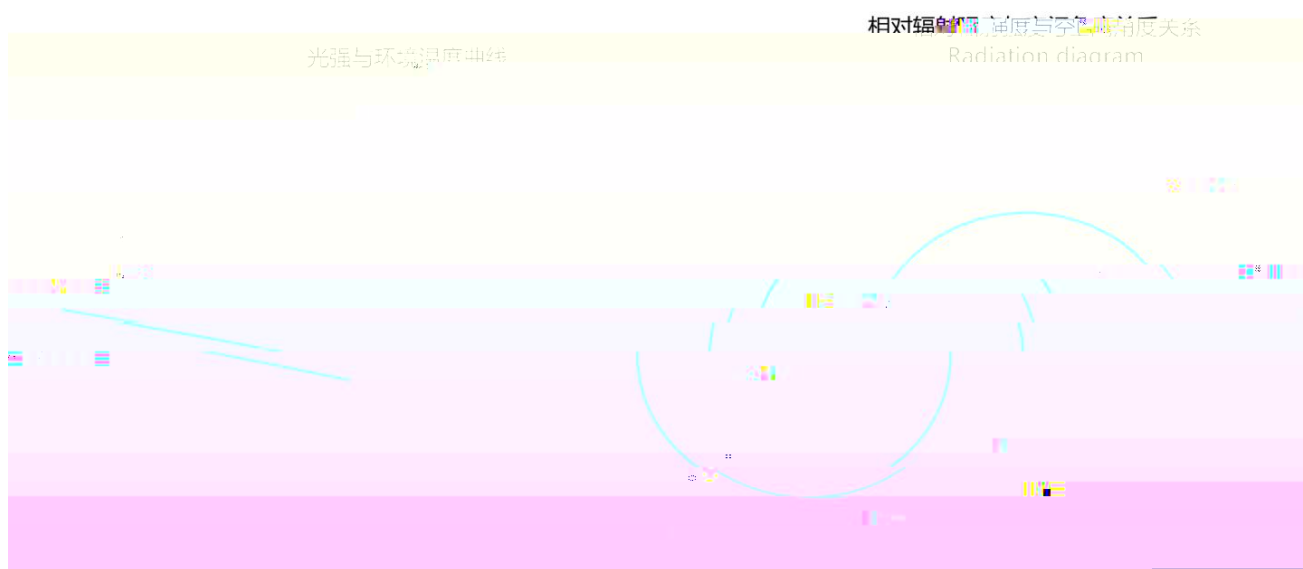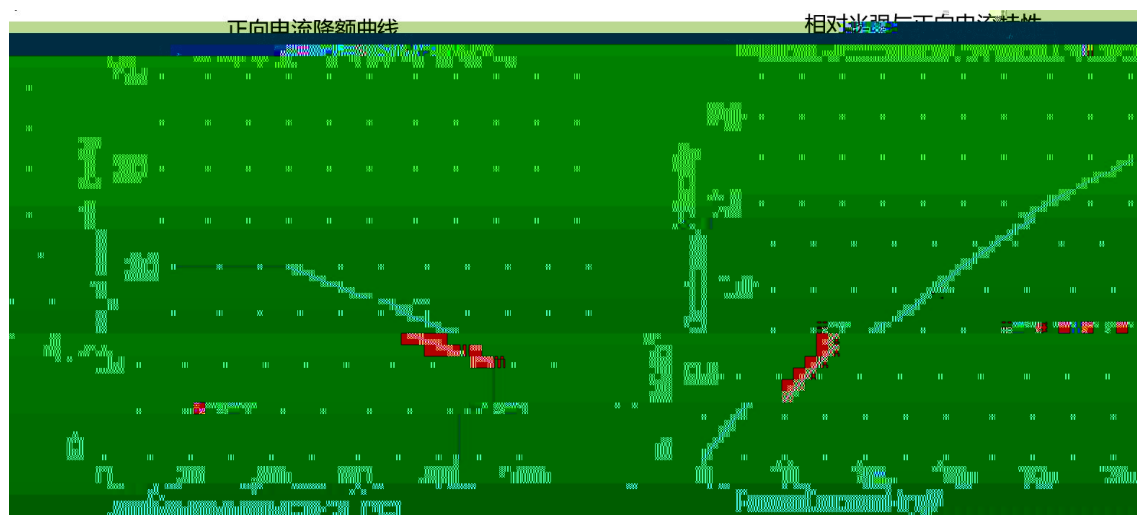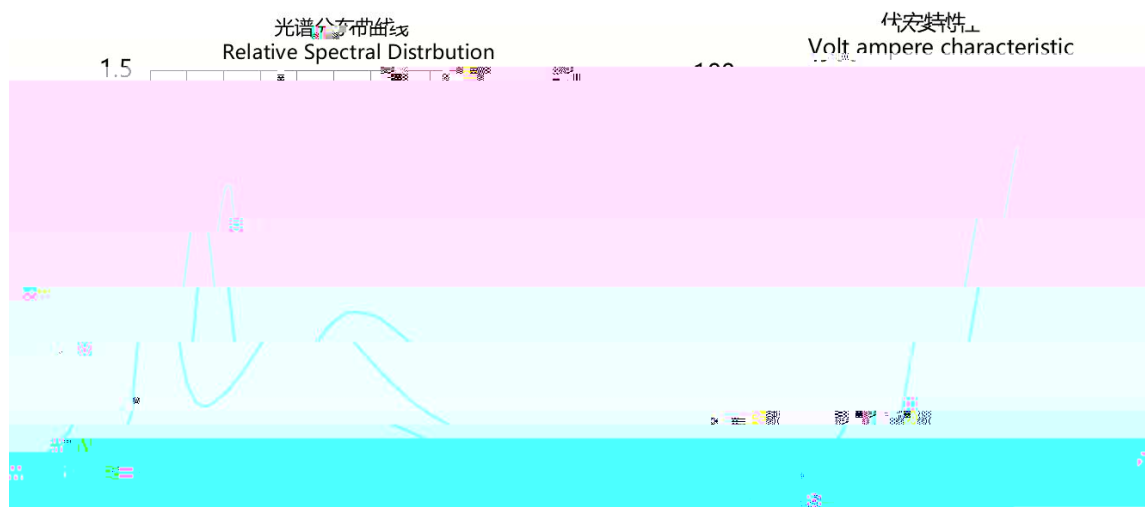

25 ± 5 /Note If not otherwise indicated the test environment temperature is 25 ± 5

Reliability Test Items And Conditions

Endurance
te







Moisture proof and anti-electrostatic package with moisture absorbent material is used, to keep moisture to a minimum.

30 60%RH

Before opening the package, the product should be kept at 30 or less and humidity less than 60% RH, and be used within a year.

30 ed

40%RH

d

168

7

00.TMS

00 bHL 90 y

D



