


XINGLI

art

WS2812b

1.3535

4-q

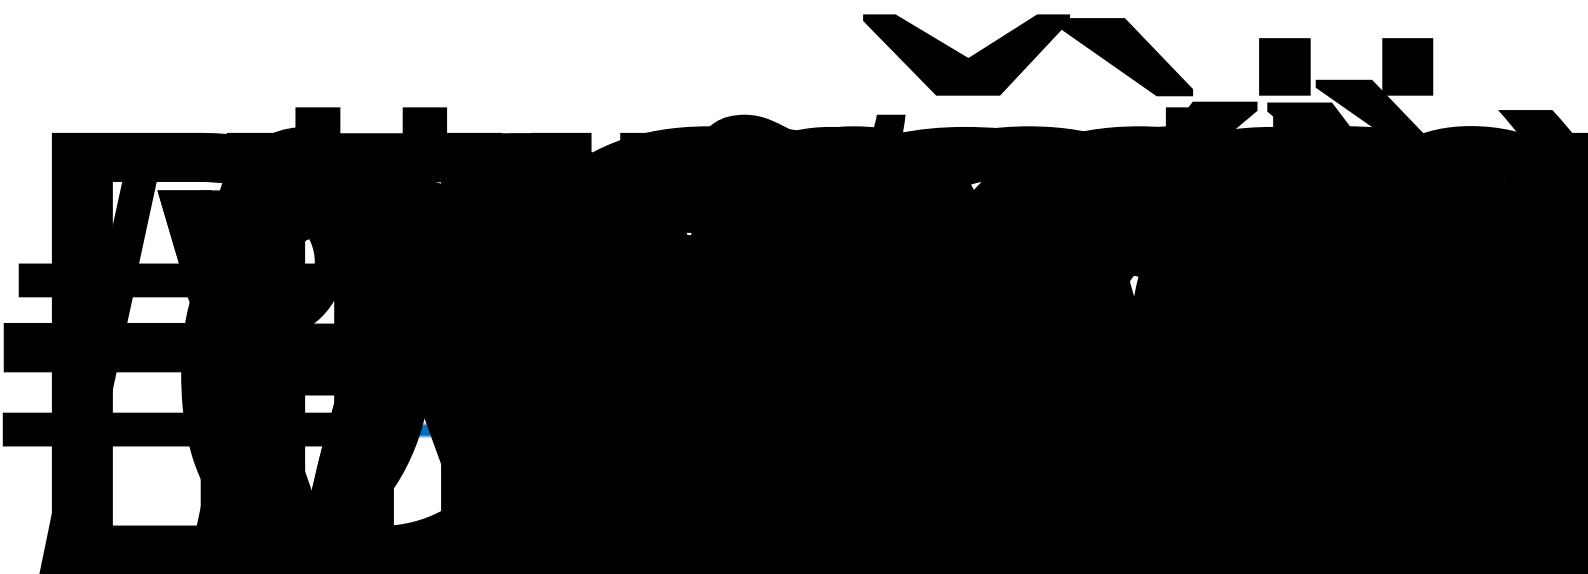

电性参数

Electrical Parameters

Ta=25℃ Absolute Maximum Rating (Ta=25℃)

8fwm

Part 11

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Condition
Data transfer speed	fDATA	-	800	-	KHz	
R/G/B PWM PWM FREQUENCY OF R/G/B port	fPWM	-	4.0	-	KHz	

Data forward transmission delay









包装（1）

Packaging (1)

包装（2）

Packaging (2)





焊接指导 (1)

Guideline for Solder

使用烙铁人手焊接

30

回流焊

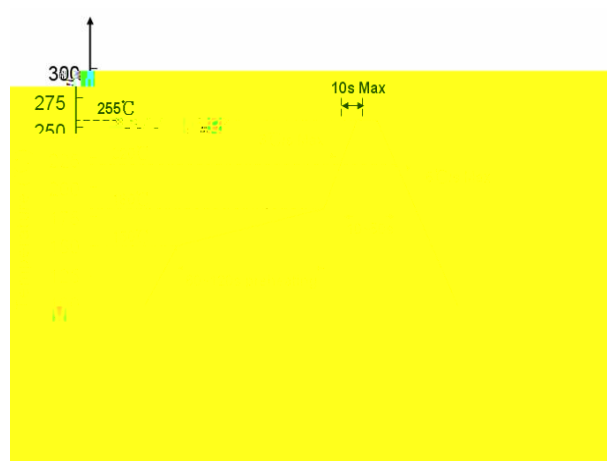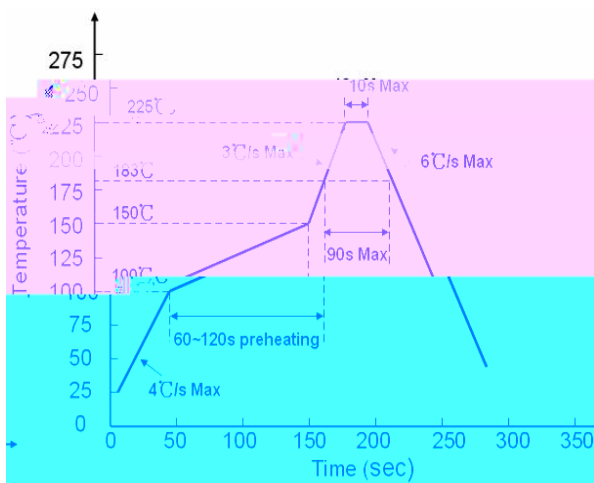

8H

±

±



