


XINGLI

art

WS2812b

1.3535

4-q

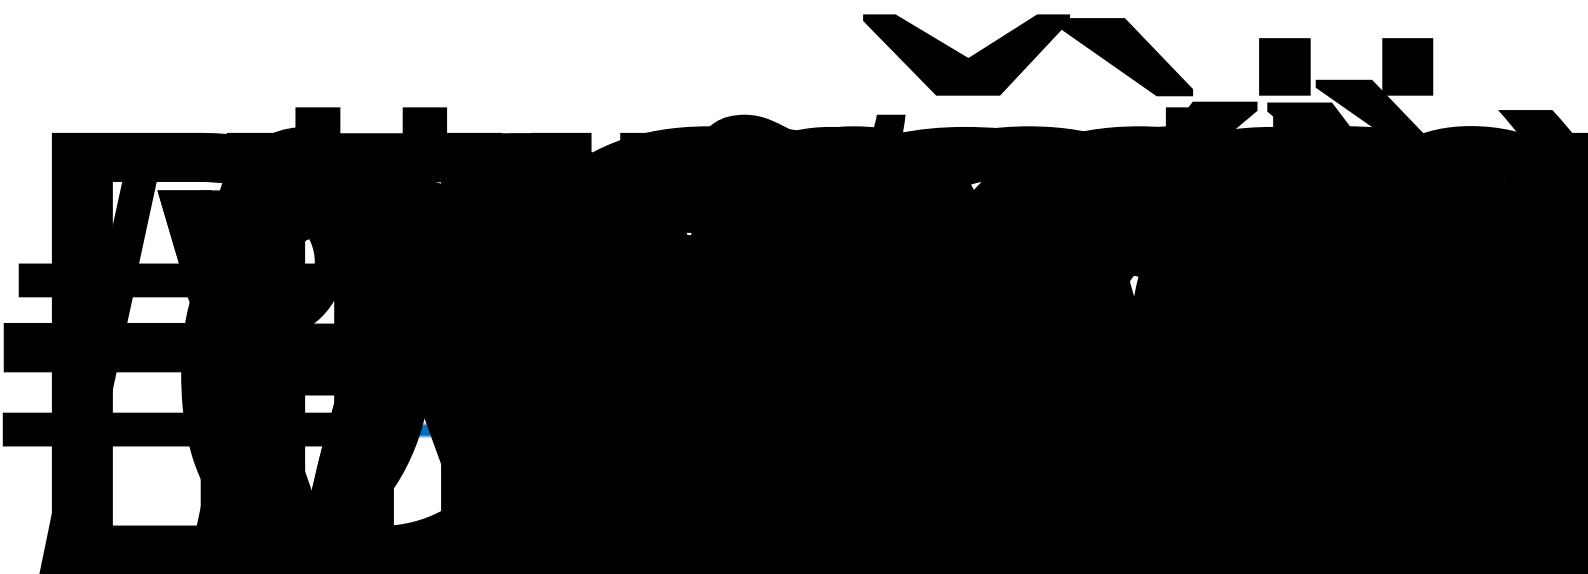



XINBLIGHT

Ä Ta=25 Average Maximum Rating (m25)

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Condition
Data transfer speed	f _{DATA}	-	800	-	KHz	
R/G/B PWM PWM FREQUENCY OF R/G/B port	f _{PWM}	-	4.0	-	KHz	
Data forward transmission delay						



包装（1）

Packaging (1)

包装（2）

Packaging (2)



焊接指导 (1)

Guideline for Solder



1. 使用烙铁人手焊接

Hand Soldering

30

2. 回流焊接

Reflow Soldering:

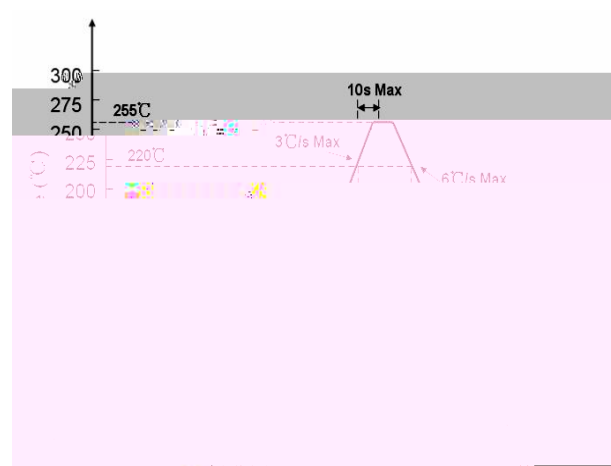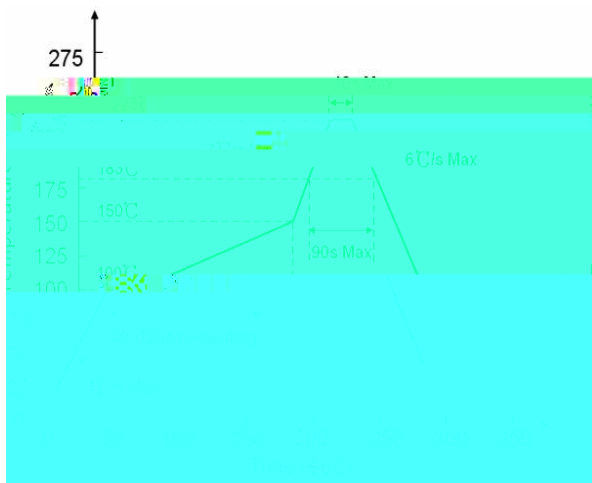

8H

±

±



使用注意事项（3）

Precautions (3)

4.

