典型特性曲线

Typical Characteristics Curves

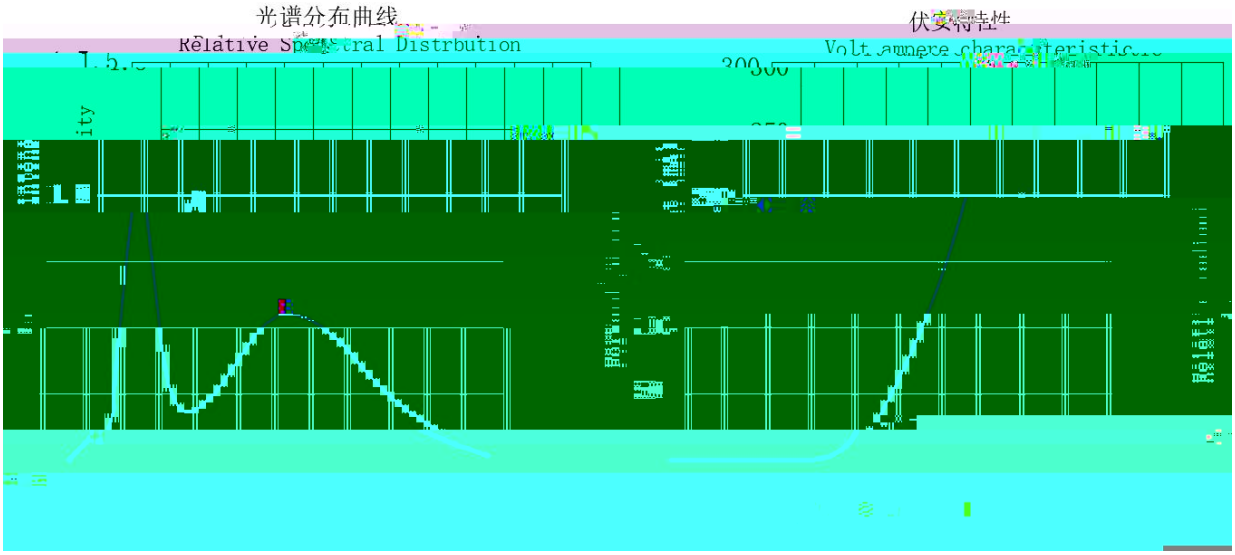

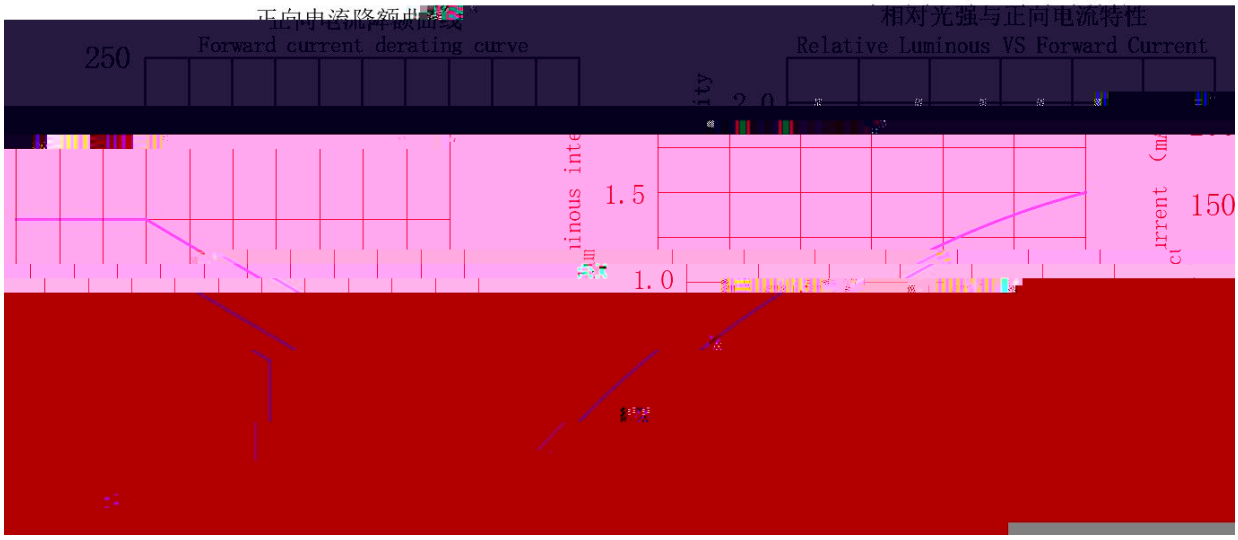

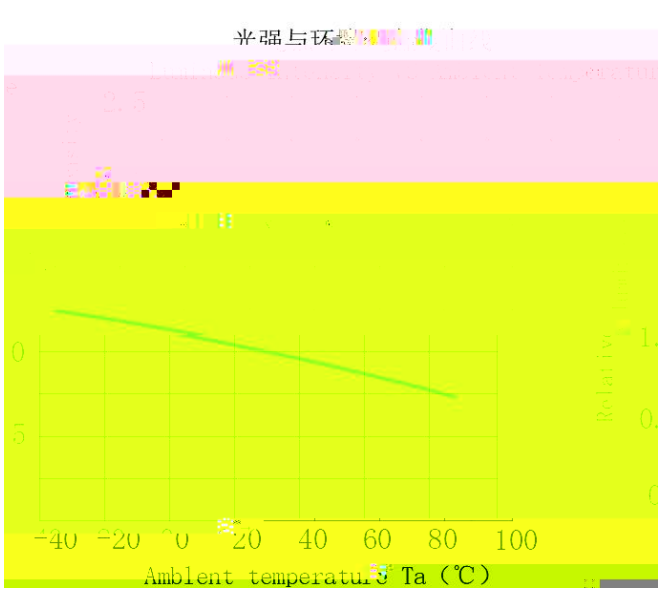

相对辐射强度与空间角度关系

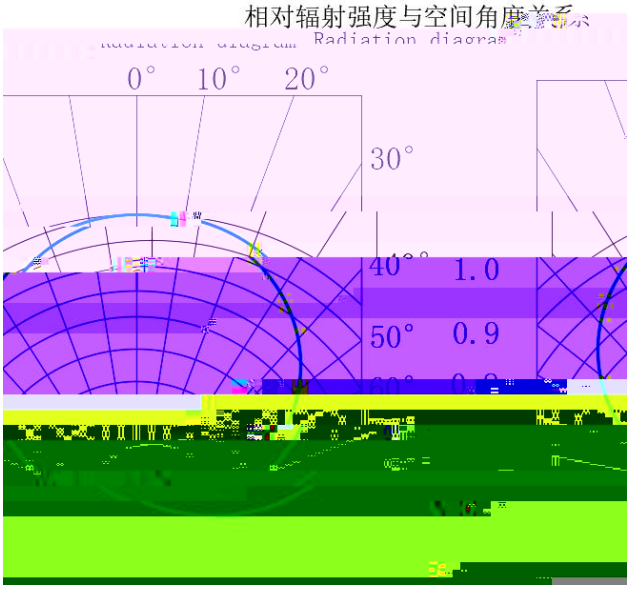

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Reference standard
Working life	30mA	Continuous lighting at the maximum rated current at room temperature	1000hrs	
Endurance test				

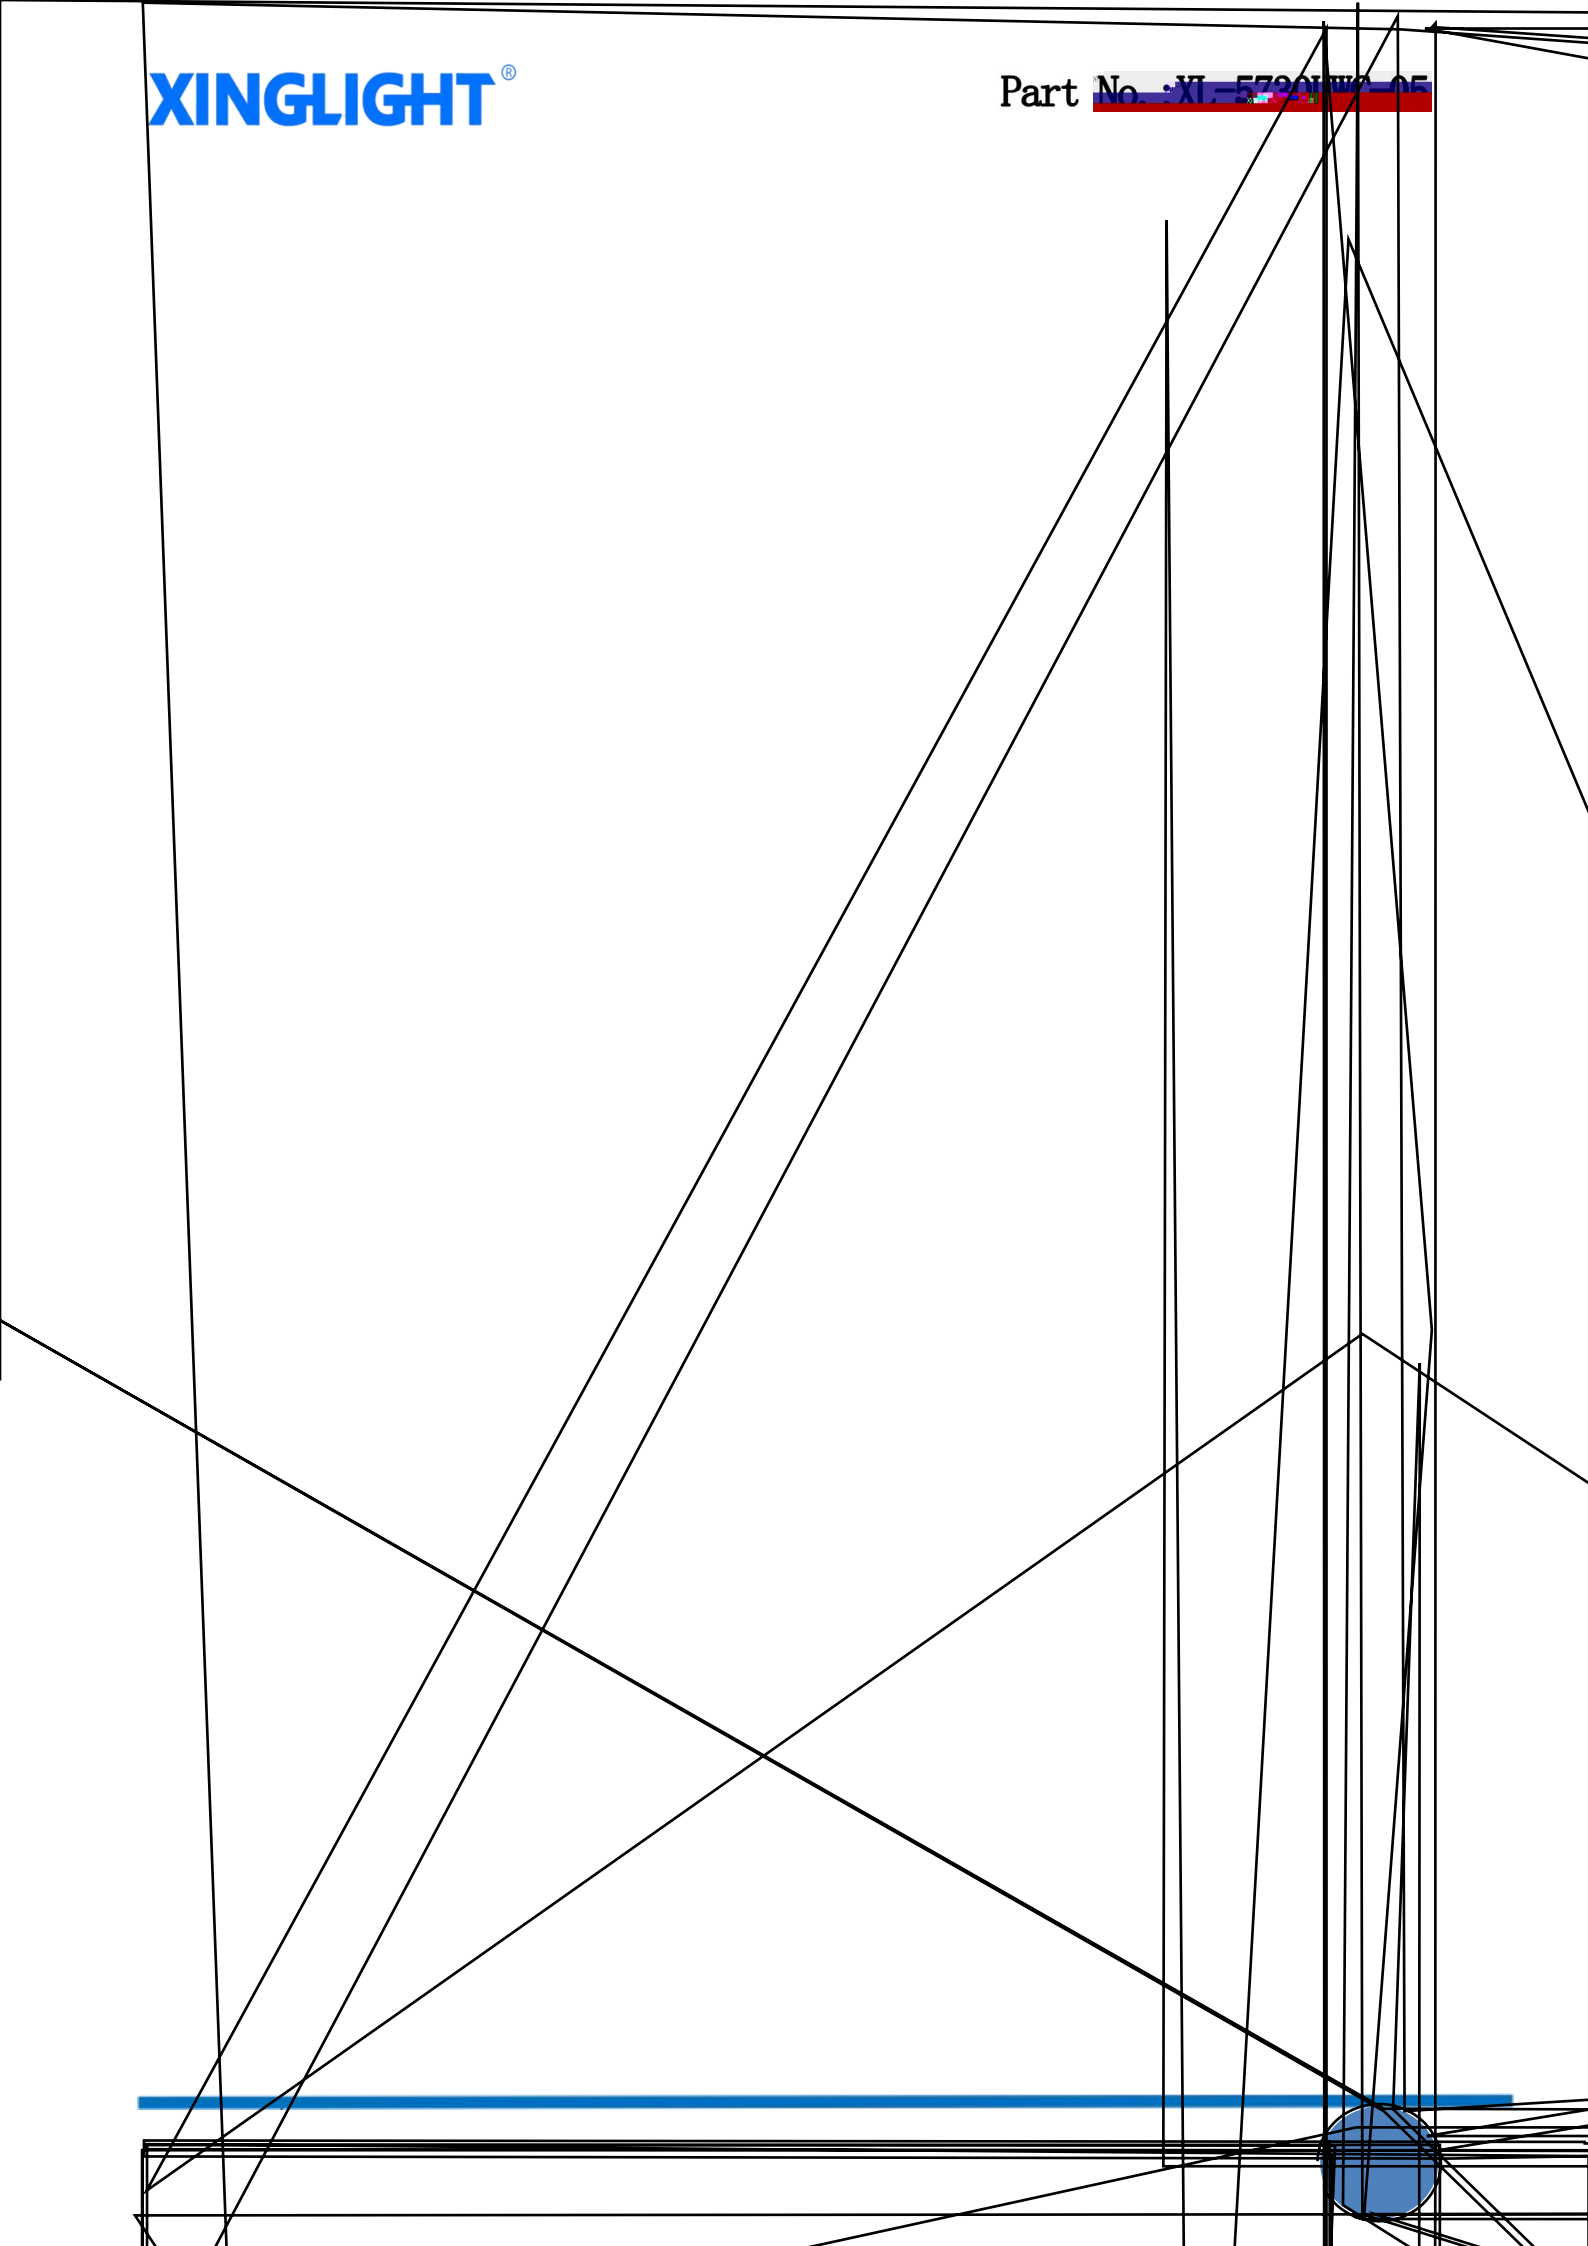

XINGLIGHT®

Part No. : XL-5720UWC-05

使用注意事项（3）

Precautions (3)

其他事项