



®

Pat

11-0000

Pat

© 1999-2000



Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Pulse Forward Current	IFP(R)	200	mA
	IFP(IR)	200	
Forward Currentn	IF(R)	50	mA
	IF(IR)	50	
5%	(,		



可靠性试验

Reliability Test Items And Conditions

Test Items	Reference	Test Conditions	Time
------------	-----------	-----------------	------

Criteria For Judging Damage)






包装 (2)

Packaging (2)

◇ 防潮防静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

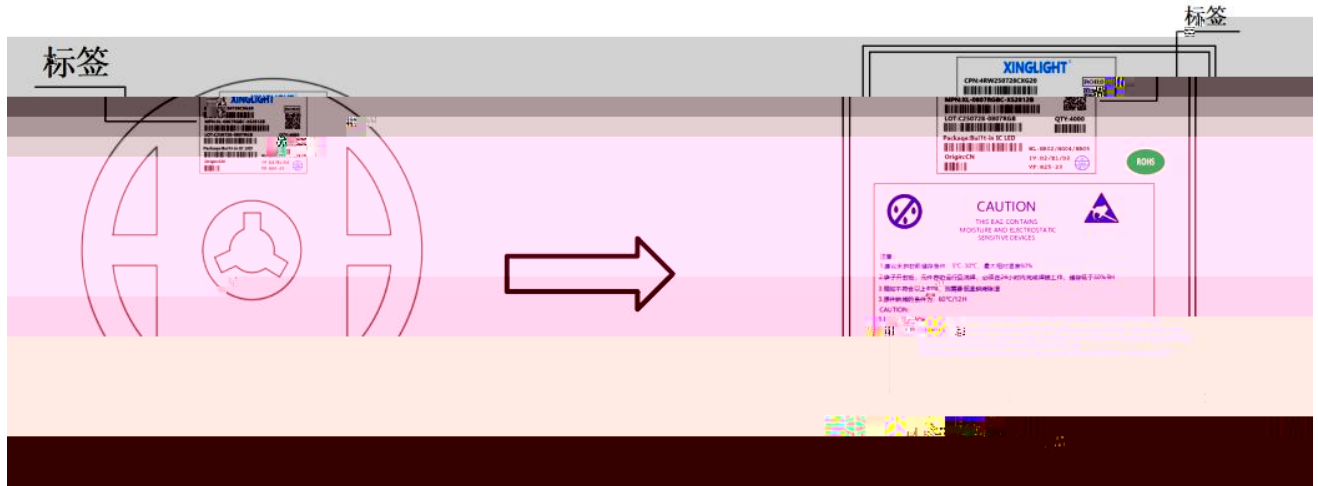

◇ 防潮防静电 Cardboard Bag



◇ 标签说明 Label Expansion





使用注意事项（2）

Precautions (2)

3. 设计建议:

Design Consideration



