








Date transmission mode

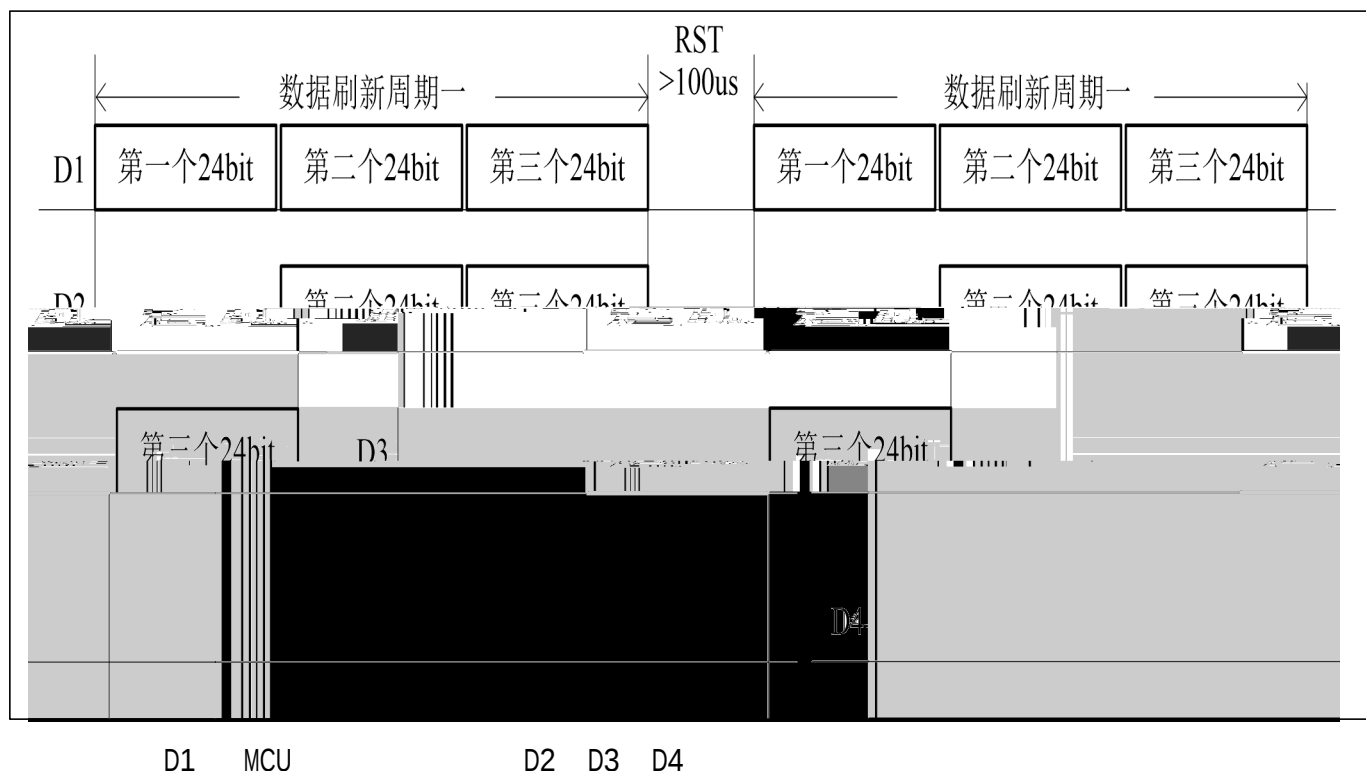


D1 MCU

D2 D3 D4

Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit


24bit data structure

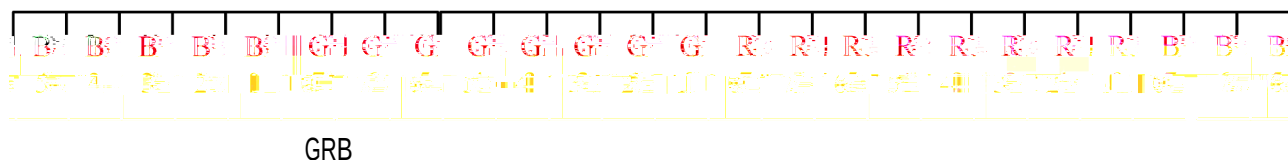

GRB

Note: high order first send, send data in the order of GrB

:Time sequence waveform:


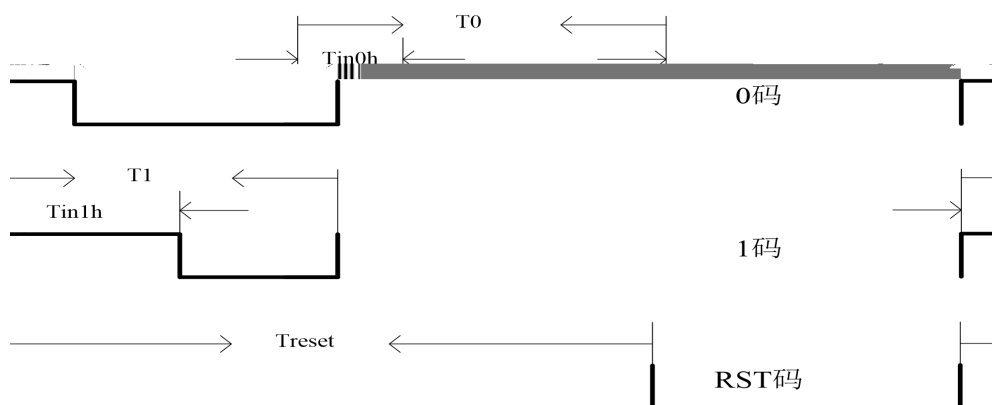






外形尺寸

Outline Dimension

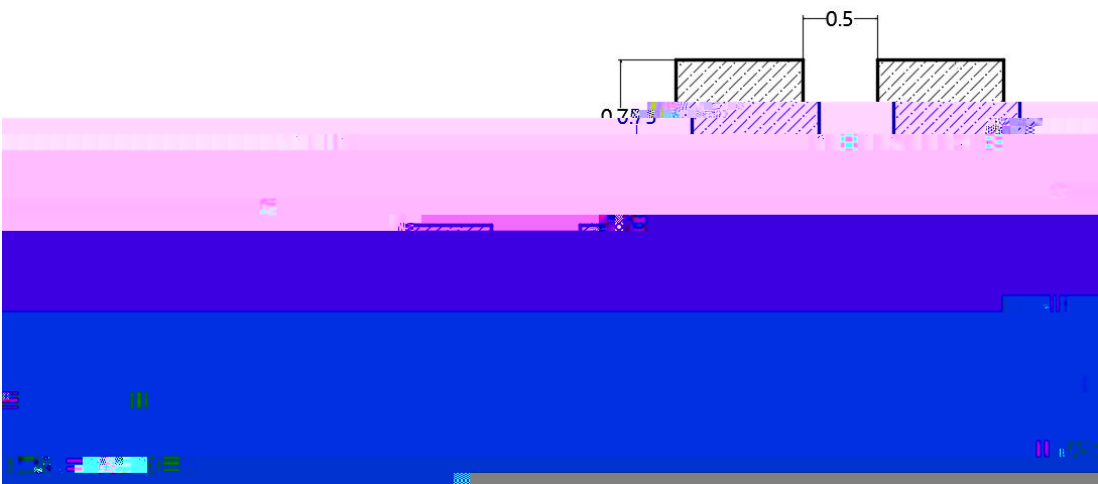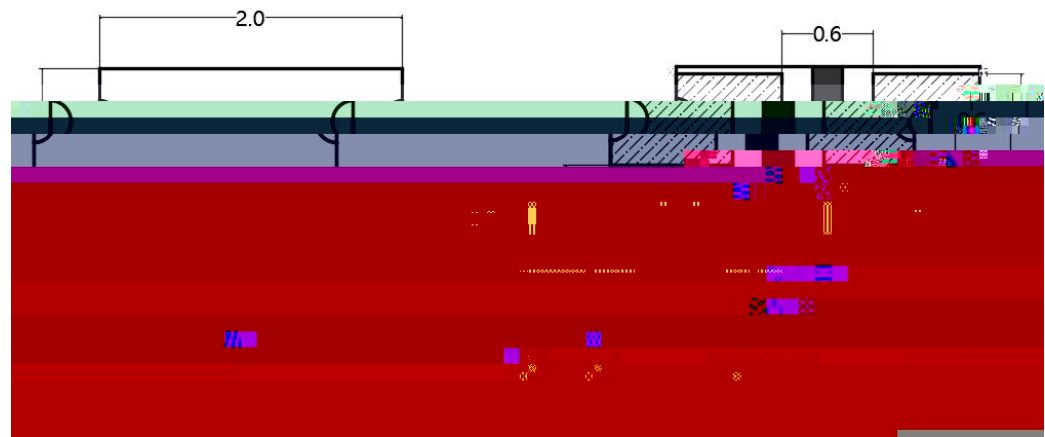


		IC RGB



包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

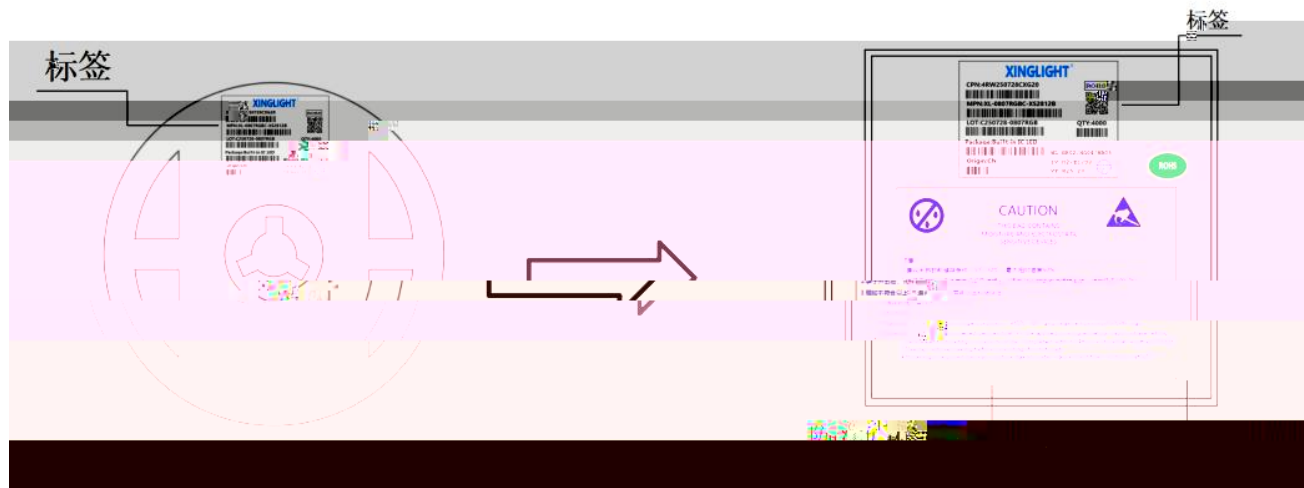

◇ 标签说明 Label Explanation

CPN: 批号/档位		LOT: 日期/封装颜色		XINGLIGHT	
MPN: 型号		VF: 电压代码		CPN: 4RW250728CXG20	ROI
WL: 波长代码		IV: 亮度代码		MPN: XL-0807RGB	QTY: 4000
				LOT: C250728-0807RGB	
				Package Size: 100x100x100	
				Weight: 100g	

Guideline for Solder

使用烙铁人工焊接

30

3/10/1998 11:00 AM
KODS-010 1 21/12/1998 11:00 AM





使用注意事项（3）

Precautions (3)

其他事项