





## 目录

---

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指南


使用注意事项








## Date transmission mode

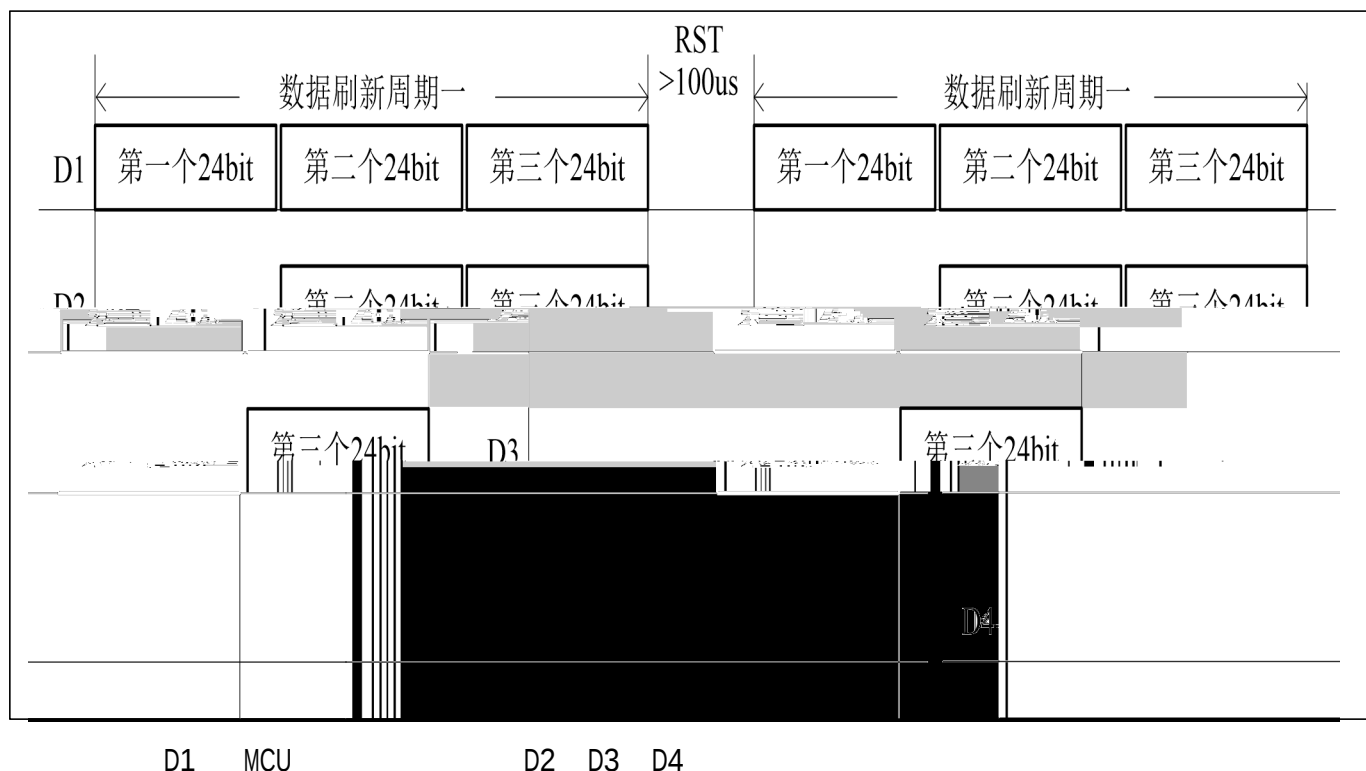


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

## 24bit 24bit data structure

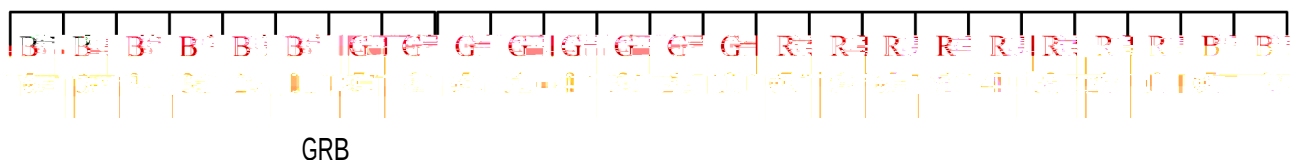

Note: high order first send, send data in the order of GrB

## Time sequence waveform:

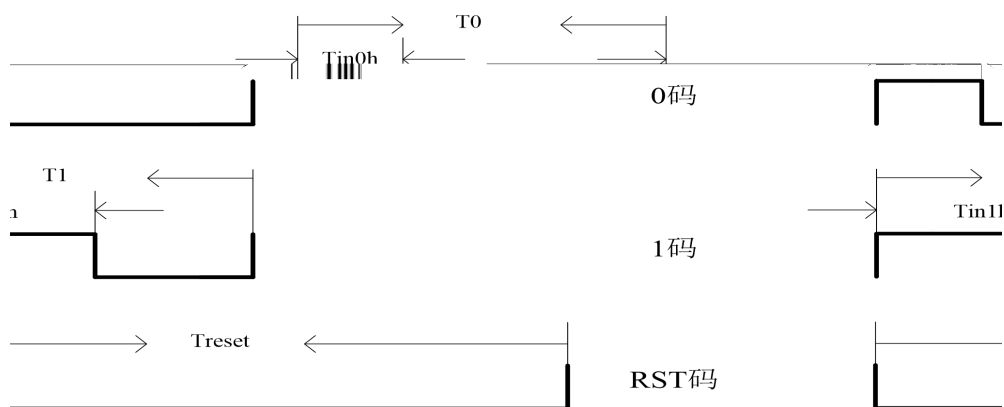












## 包装 (2)

### Packaging (2)

#### ◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

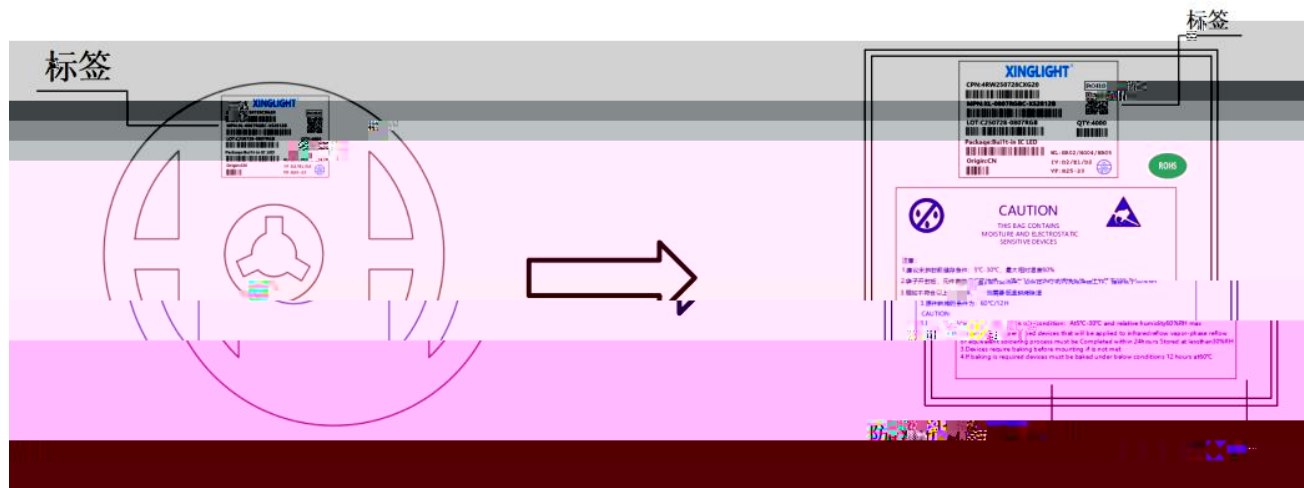

#### ◇ 标签说明 Label Explanation

| CPN: 批号/档位 |  | LOT: 日期/封装颜色 |  | XINGLIGHT            |         |
|------------|--|--------------|--|----------------------|---------|
| MPN: 型号    |  | VF: 电压代码     |  | CPN:4RW250728CXG20   | ROI     |
| WL: 波长代码   |  | IV: 亮度代码     |  | MPN:XL-0807RC        | QTY:400 |
|            |  |              |  | LOT:C250728-0807RC01 |         |

## 焊接指导 (1)

Guideline for Solder

使用烙铁手工焊接

严禁手工焊接







