










Date transmission mode

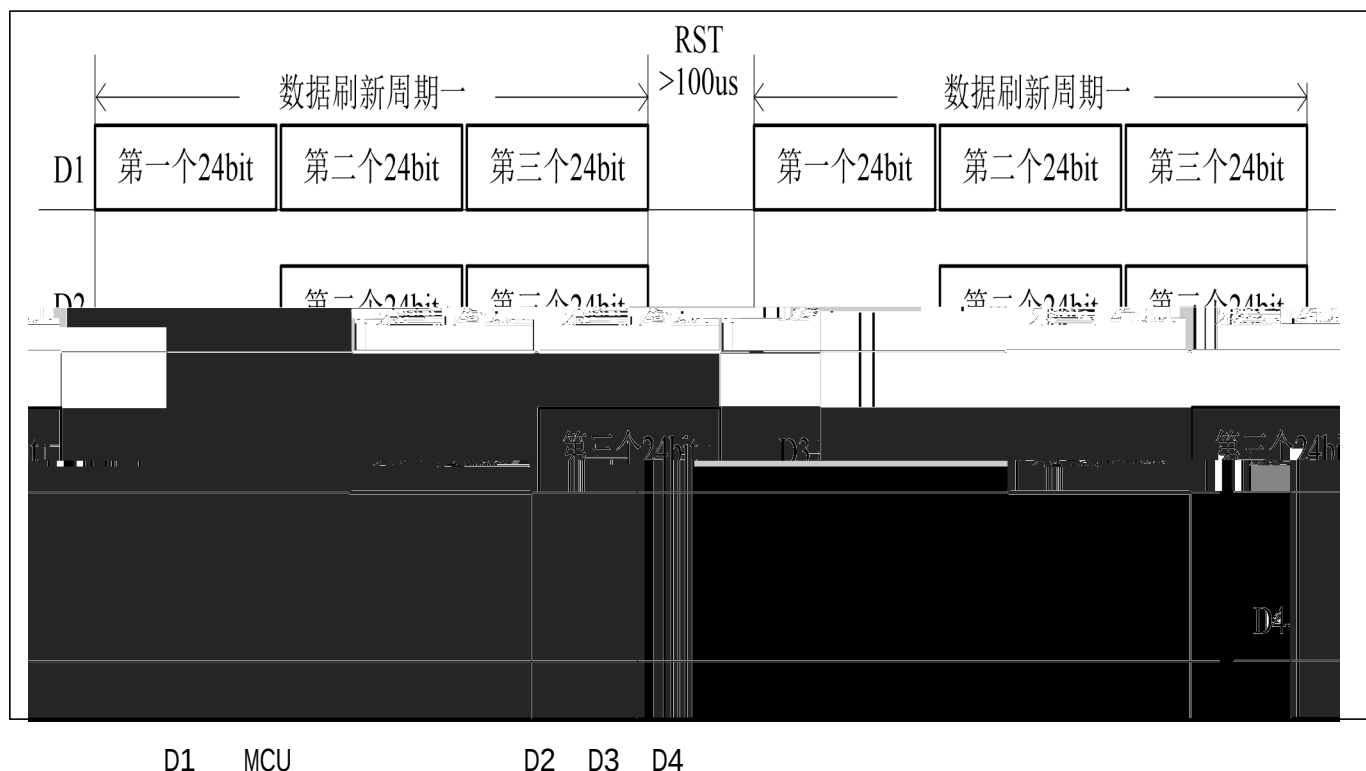


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure



Note: high order first send, send data in the order of GrB

:Time sequence waveform:



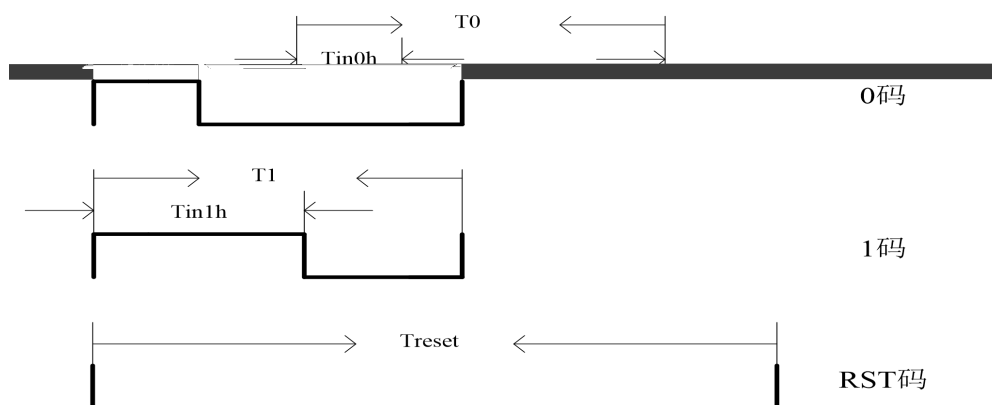






外形尺寸

Outline Dimension

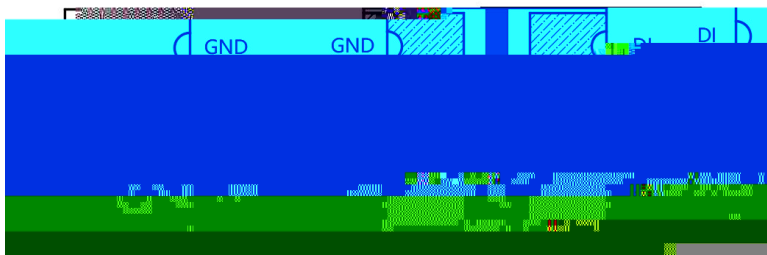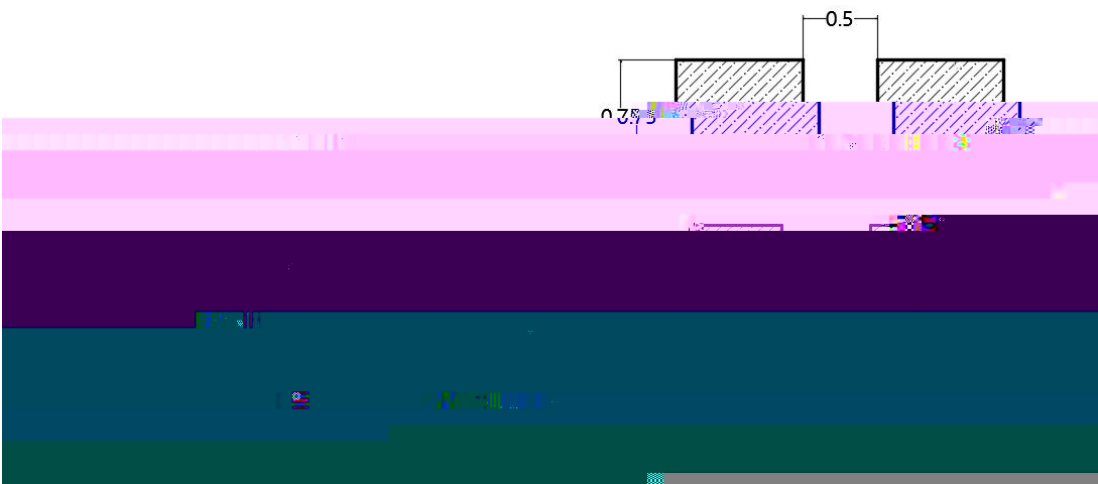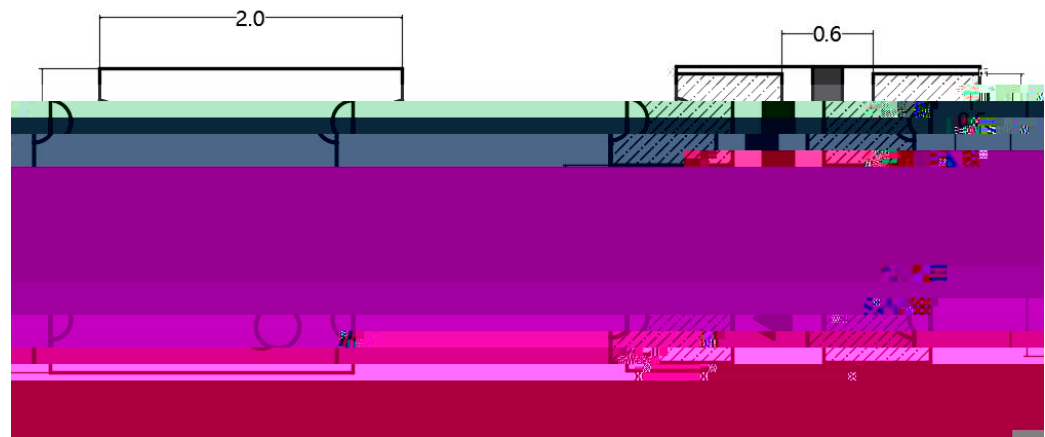


		IC RGB



包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

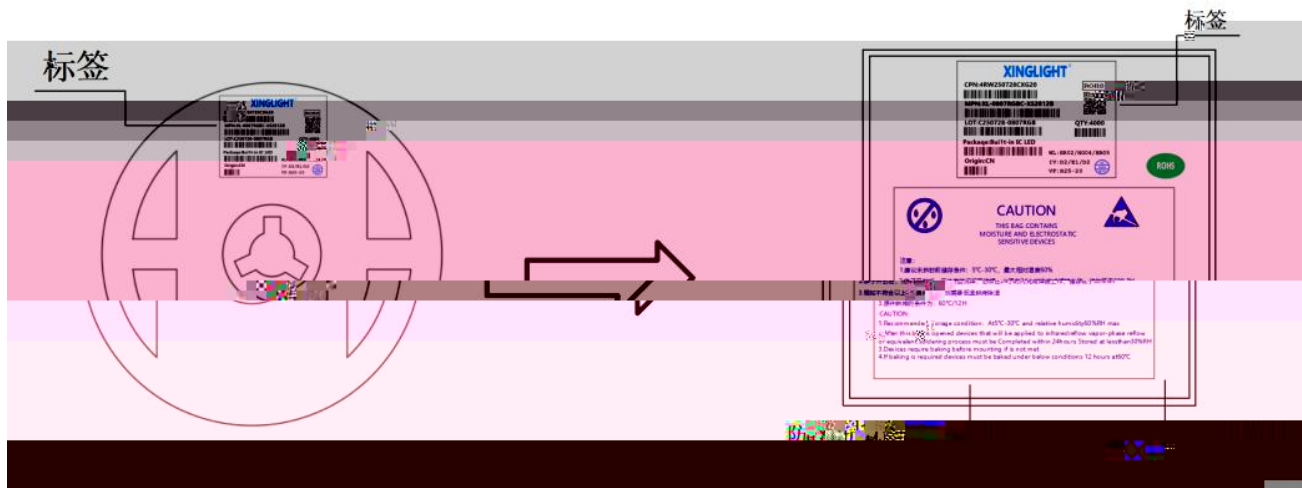

◇ 标签说明 Label Explanation



Guideline for Soldering

30

3/HE INDEX 1 A. 61'SCEM
K068-050 1 21H2VAT/PH 21H2





使用注意事项（3）

Precautions (3)

其他事项