



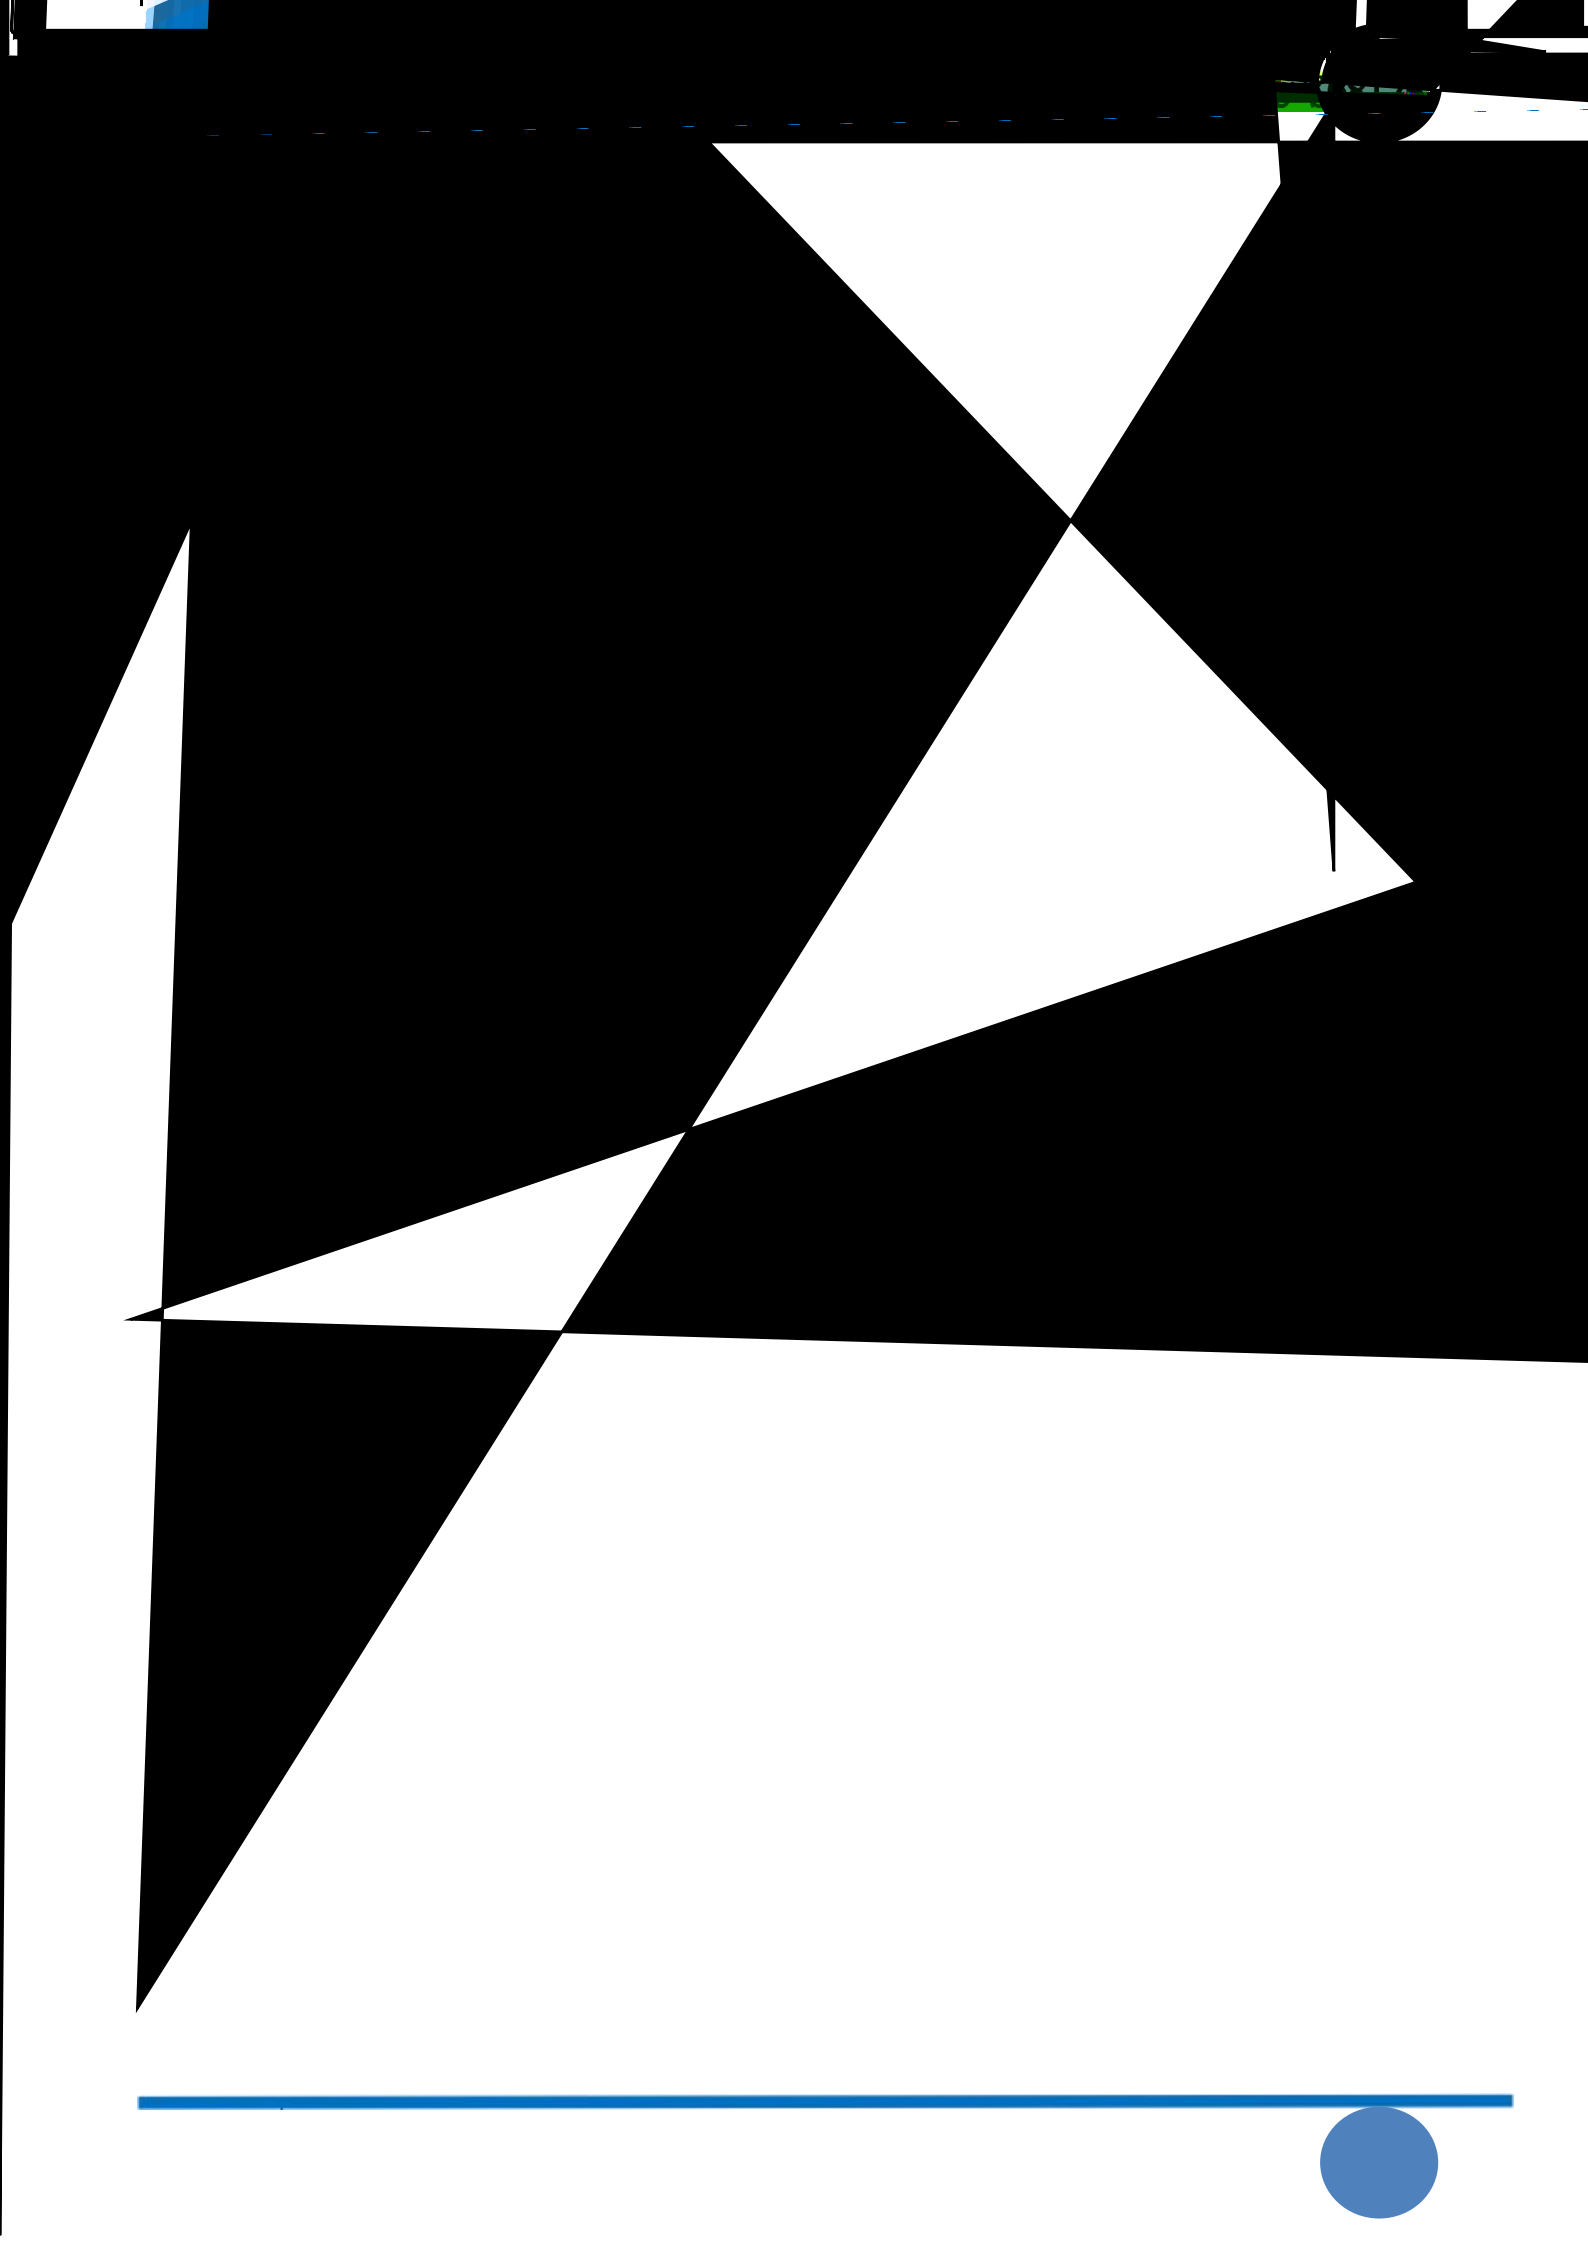


Date transmission mode

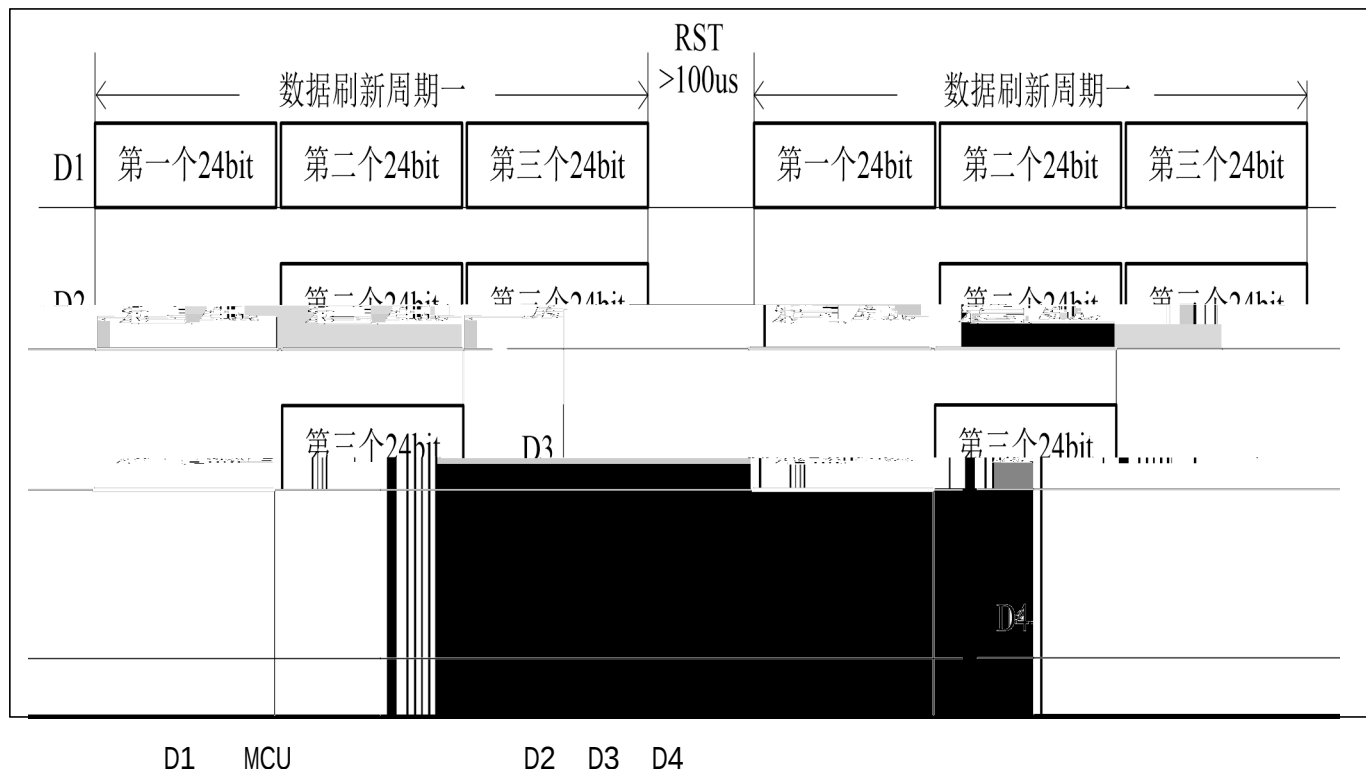


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure

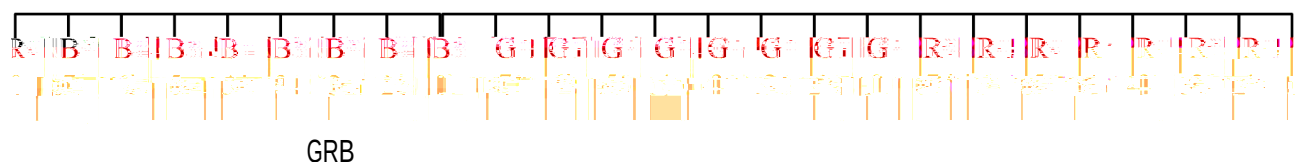

Note: high order first send, send data in the order of GrB

•Time sequence waveform:

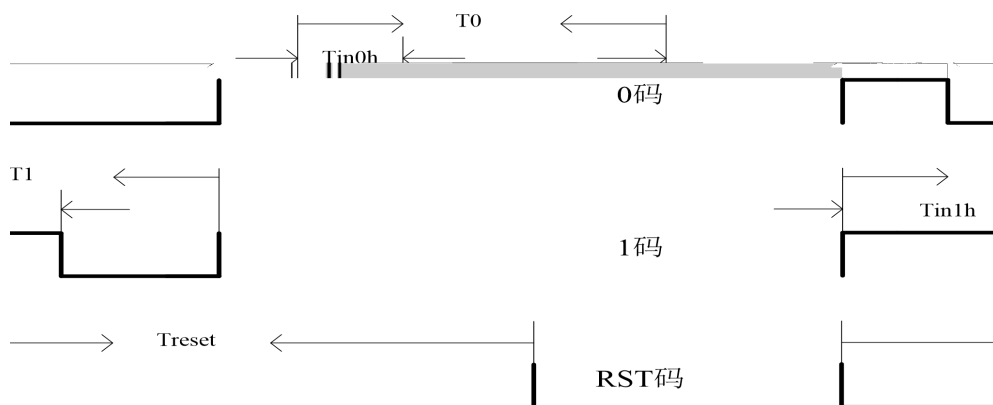










包装 (1)

Packaging (1)

载带与圆盘尺寸

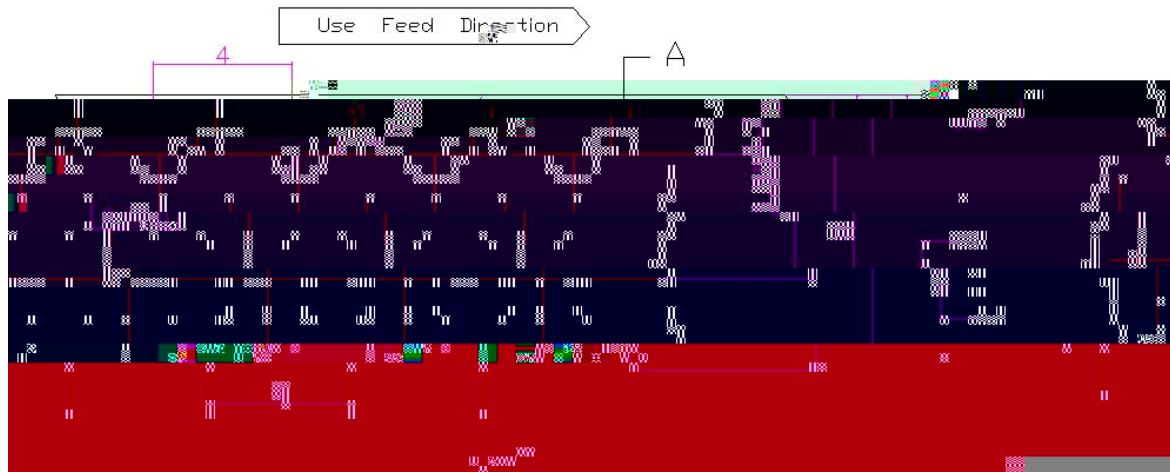


1. mm

Remarks: All dimensions are in millimeters.

2. $\pm 0.25\text{mm}$

Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted

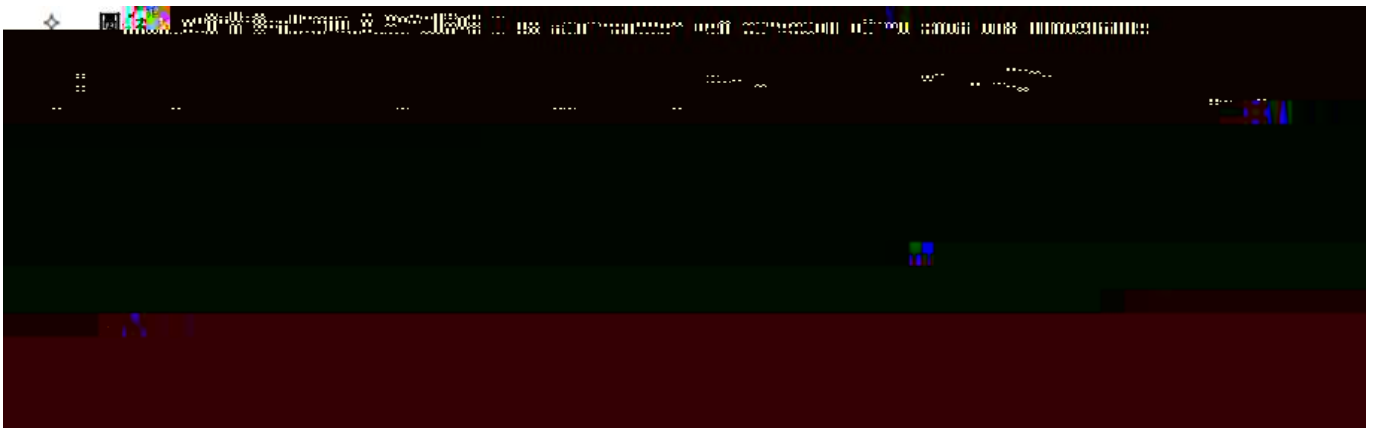



焊接指导 (1)

Guideline for Solder


使用烙铁手工焊接

30 W

300

3



**NGLIGHT®**Part IV: [Part IV: Practice Exams](#)



