典型特性曲线

Typical Characteristics Curves

光谱分布曲线

Relative Spectral Distrbution

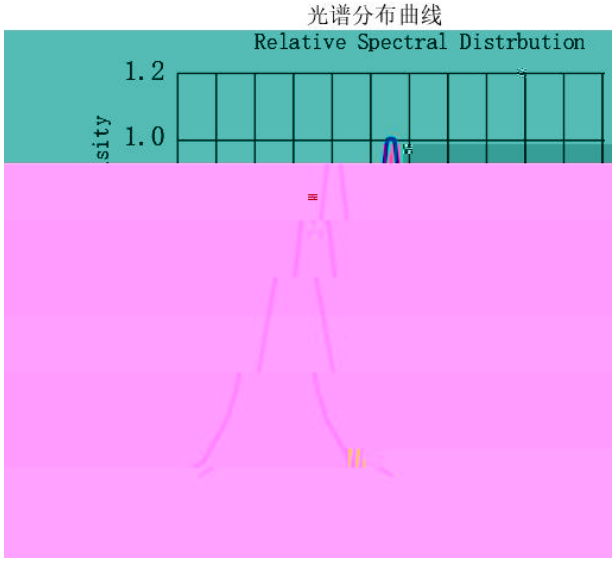

伏安特性

Volt ampere characteristic

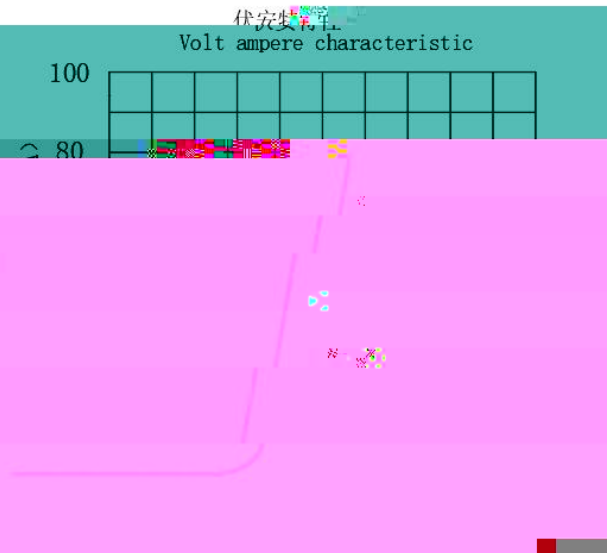

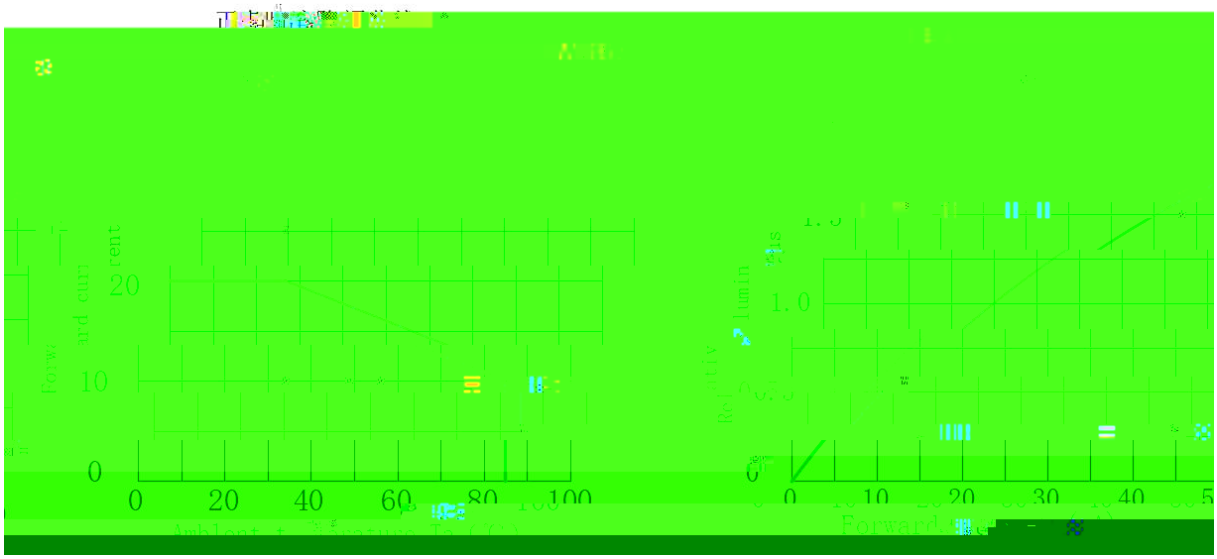

光强与环境温度曲线

Luminous Intensity VS Ambient Temp

相对辐射强度与空间角度关系

Radiation diagram

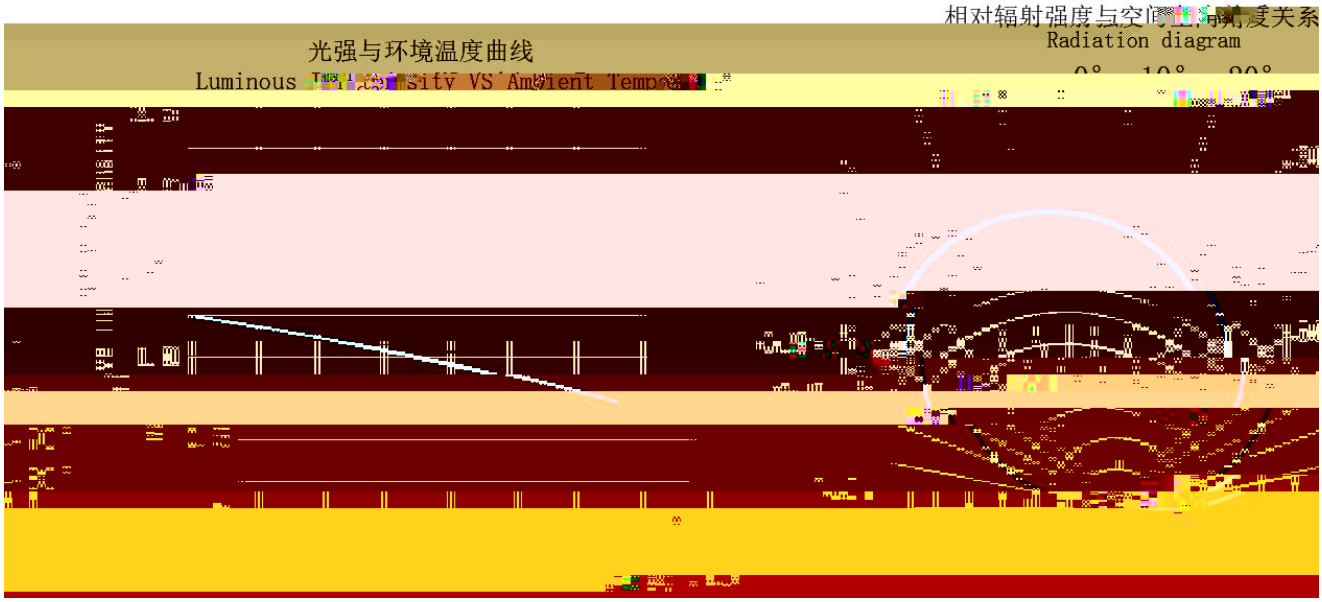

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

Contents

Chapter 1 Introduction 1
Chapter 2 Methodology 3
Chapter 3 Results 5

焊接指导（1）

Guideline for Solder[redacted]

Hand Soldering

30W

300 3

LED

Manual welding is recommended only for repair and heavy industry situations. A soldering iron of less than 30W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron under 300 while soldering. Each terminal of the LED is to go for less than 3 second and for one time only. a.o

Be careful because the damage of the products often started at the time of the hand soldering.

2ec[redacted]