

10-15mw

特点（Characteristics）：

L/W/H :3.9*3.9*3.25mm

Outline Dimensions (L / w / h)3.9mmH

应用领域（Product application）：

*

Disinfect to kill bacteria

*

Air and disinfection

*

Ultraviolet detection and communication technology


*

Food processing and preservation, packaging of food and beverage, fresh storage, etc

*

Medical hospital skin disease treatment, etc



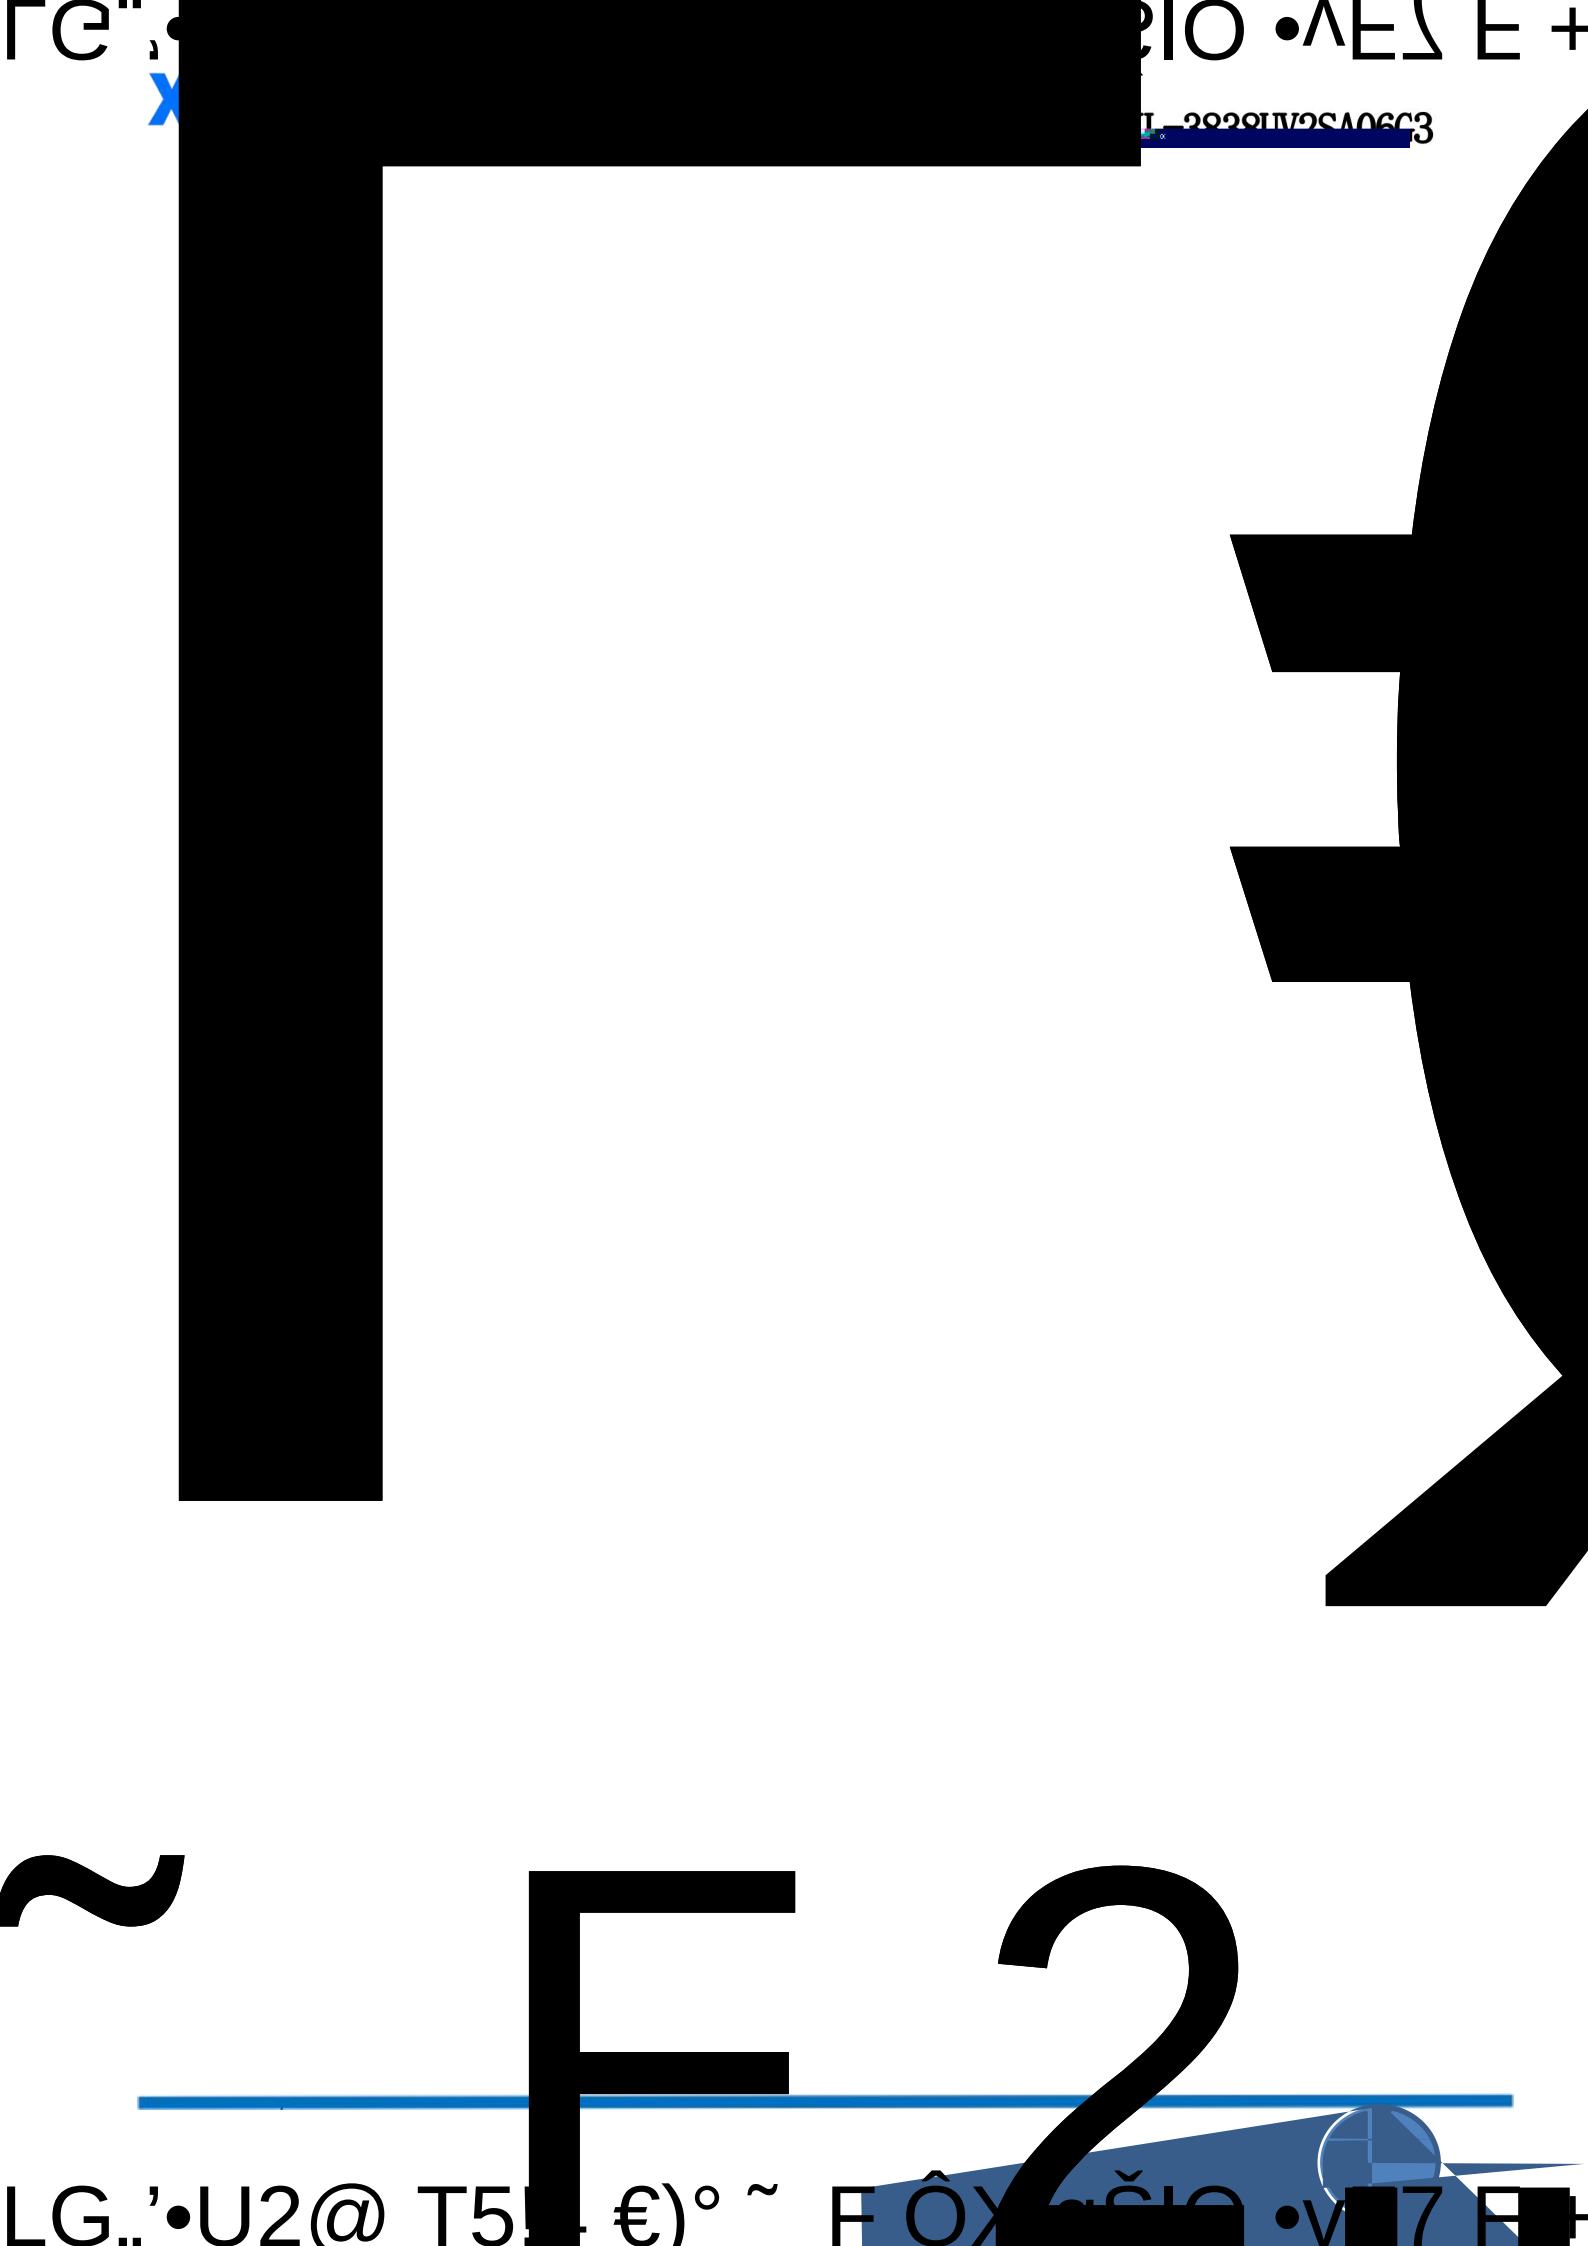

D. No. : XI-2020/IV/25406C3



Reliability Test Project

Description	Item	Test criterion	Test condition	Test time	Qty	Fail qty
Life test	Life test(room temperature)	JIS7021:B4	Ta=25 5 IF=60mA	1000Hrs	22	0
Ambience test	High temperature store	JIS7021:B10 MIL-STD-202:210A MIL-STD-750:2031	Ta=85 5	1000Hrs	22	0
	Low temperature store	JIS7021:B12	Ta=-35 5	1000Hrs	22	0
	High temperature/ humidity test	JIS7021:B11 MIL-STD-202:103D	Ta=85 5 RH=85%	1000Hrs	22	0
	Cold / Heat strike test	JIS7021:B4 MIL-STD-202:107D MIL-STD-750:1026	30min -10 5 100 5 5min 5min	50Cycles	22	0
	Cold and heat cycle test	JIS7021:A3 MIL-STD-202:107D MIL-STD-705:105E	5min 5min 5min -35 25 85 -35 30min 5min 30min 5min	50Cycles	22	0

Judging criterion:

Item	Symbol	Experiment condition	Criteria	
			Min.	Max.
Forward Voltage	V _F	IF=60mA	----	Initial Datex1.1
Reverse Current	I _R	V _R =5V	----	5 A
Luminous Intensity	IV	IF=60mA	Initial Datex0.7	----

外形尺寸

Outline Dimension

