目录

电性参数

[redacted]

可靠性实验

[redacted]

包装

[redacted]

使用注意事项

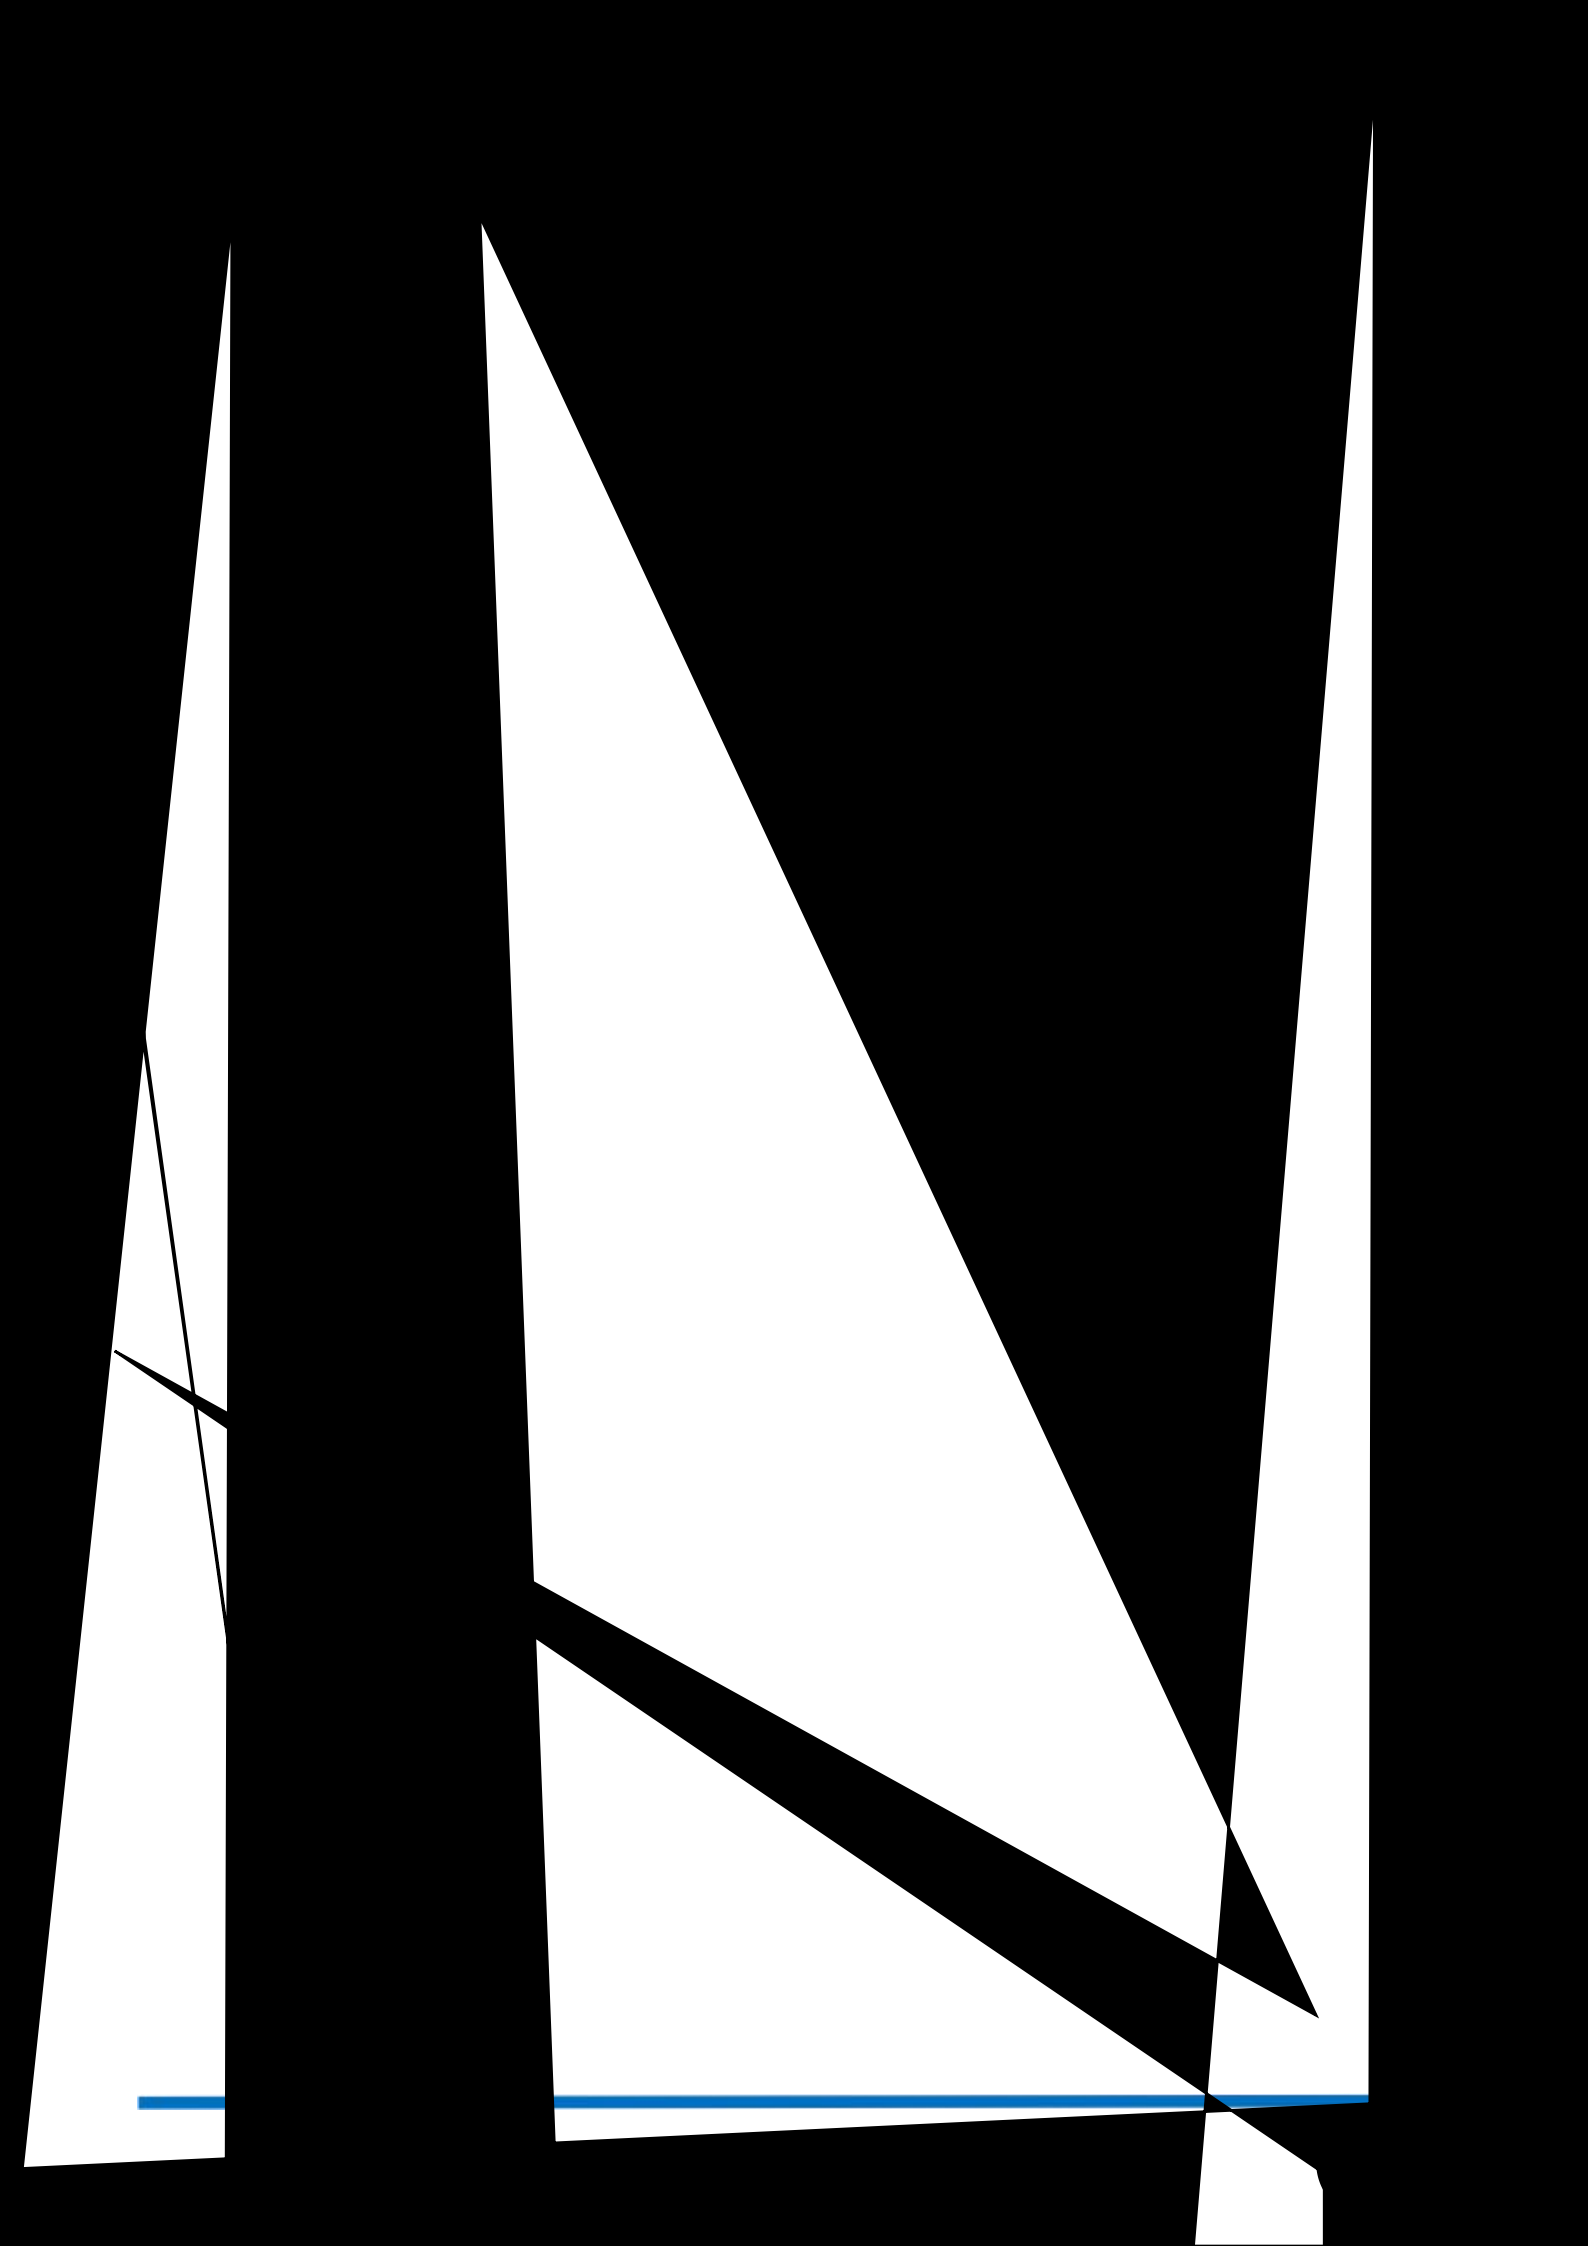

XINGLIGHT®

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Reference standard
Endurance test	Working life	Continuous lighting at the maximum rated current at room	1000 hours	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
	High temperature	20mA	1000 hours	
			-24 +72)	
			-24hours +72hours	

使用注意事项（3）

Precautions (3)

其他事项

When handling [redacted] taminate its surface, but also affect [redacted] esult in catastrophic failure of the L[redacted] t put excessive stress on LEDs, esp[redacted]