


F3MM 红普绿双色灯座共阻

目录




Electrical Characteristics.....3

Typical Characteristic Curves.....6

Outline Dimensions.....9

Packaging.....10

Precautions.....11



Initial Electrical Optical Characteristics Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Test Conditions
-----------	--------	------	------	------	-------	-----------------

亮度分档:
Brightness grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions

±10% Brightness error ±10%

Voltage grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions

电压误差±0.1V Voltage error ± 0.1V




波长分档:
Wavelength grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions

波长误差±1nm Wavelength error ± 1nm




典型特性曲线

Typical Characteristics Curves

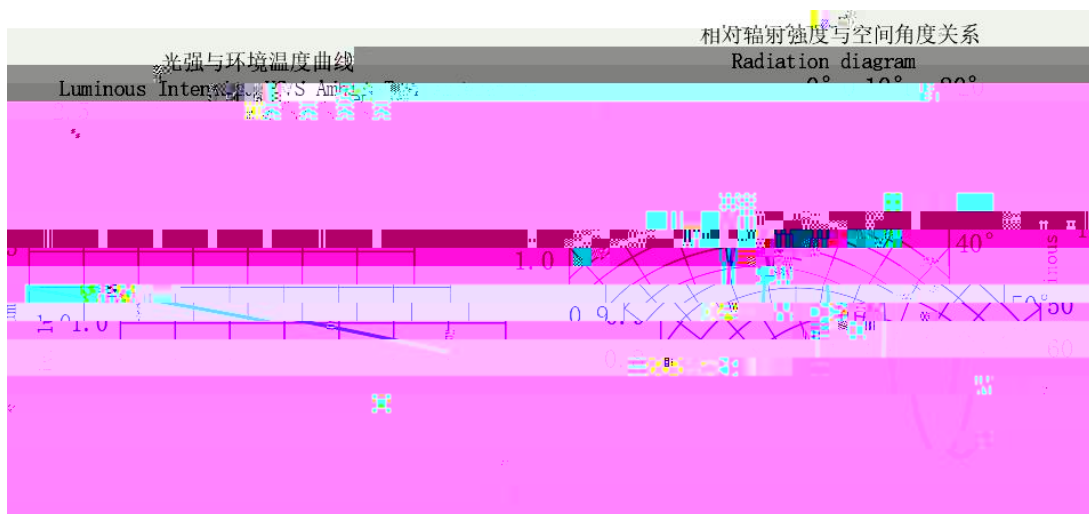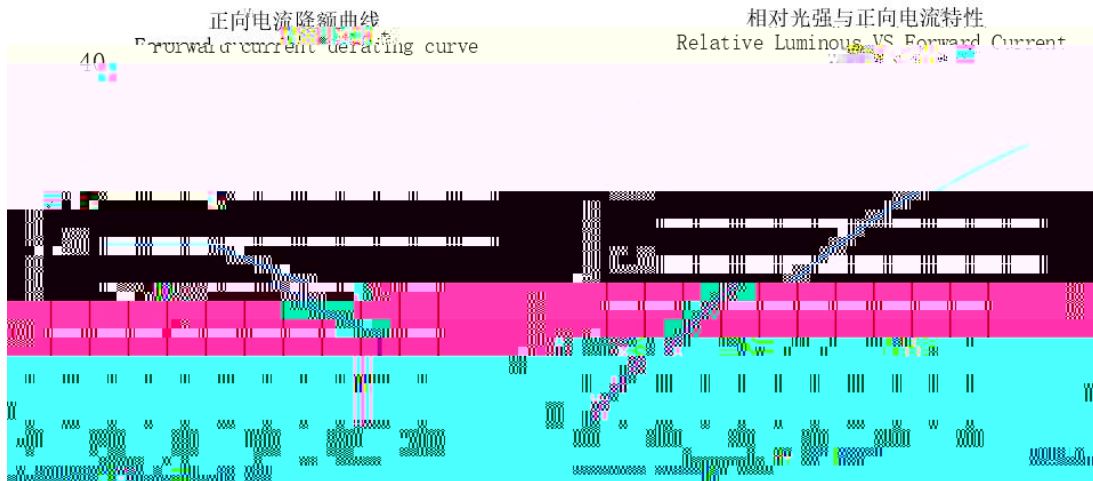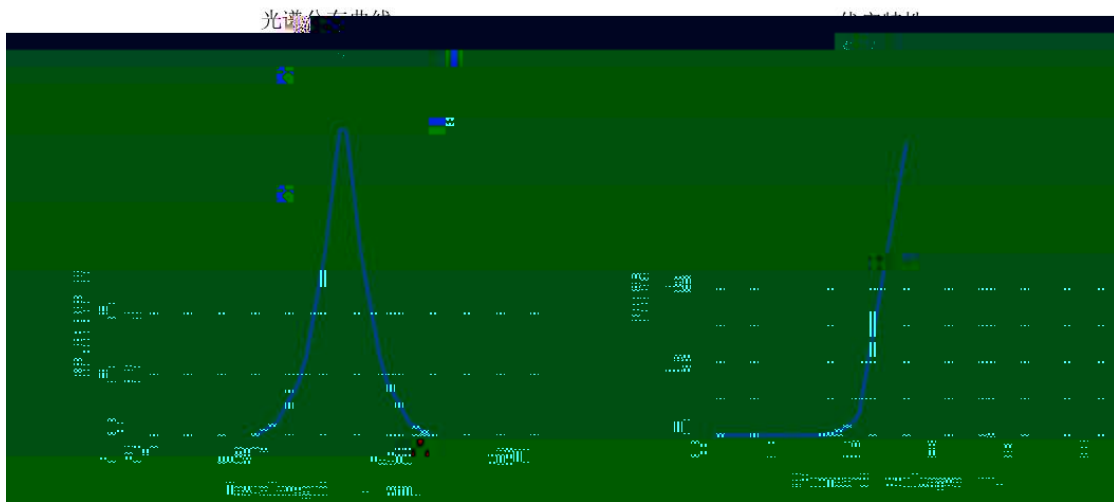

典型特性曲线

Typical Characteristics Curves

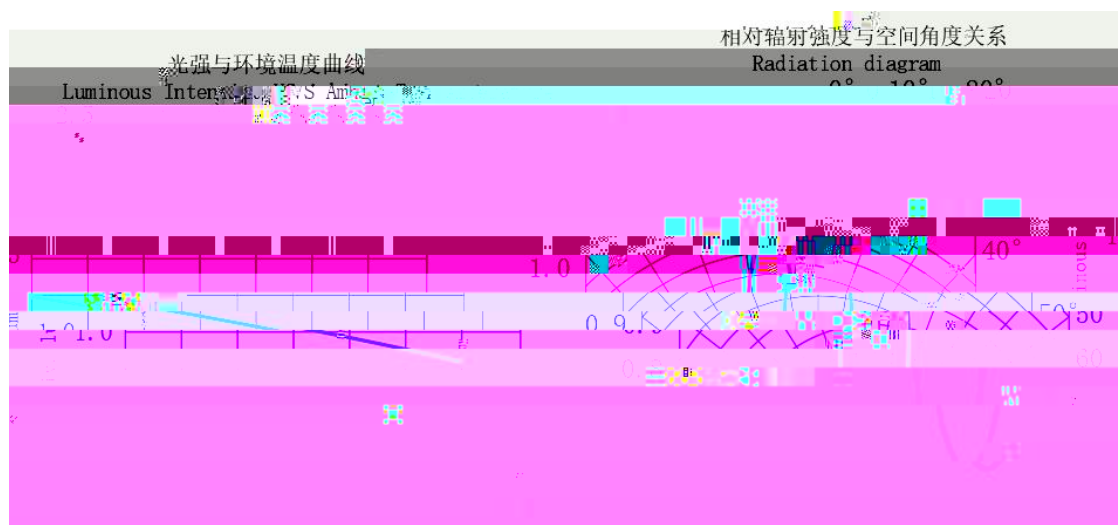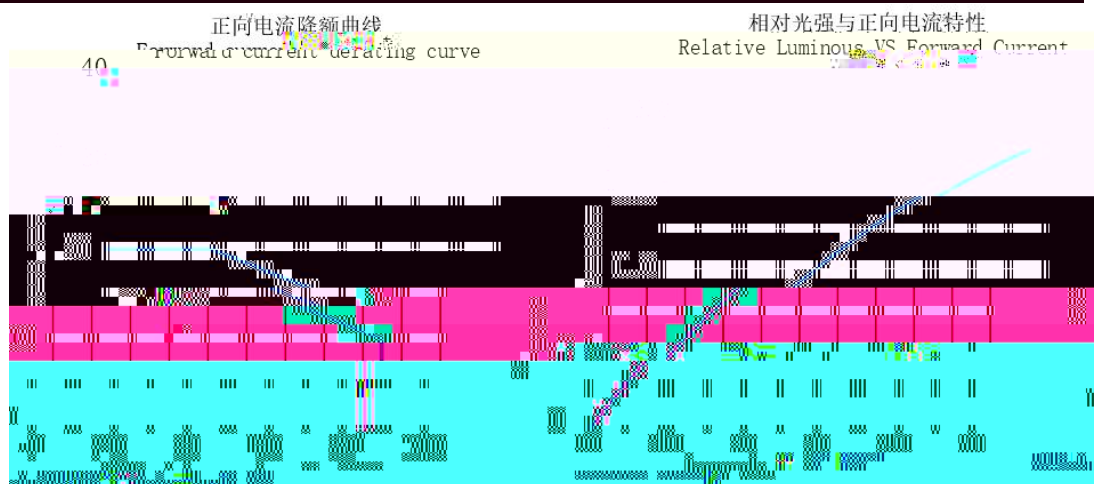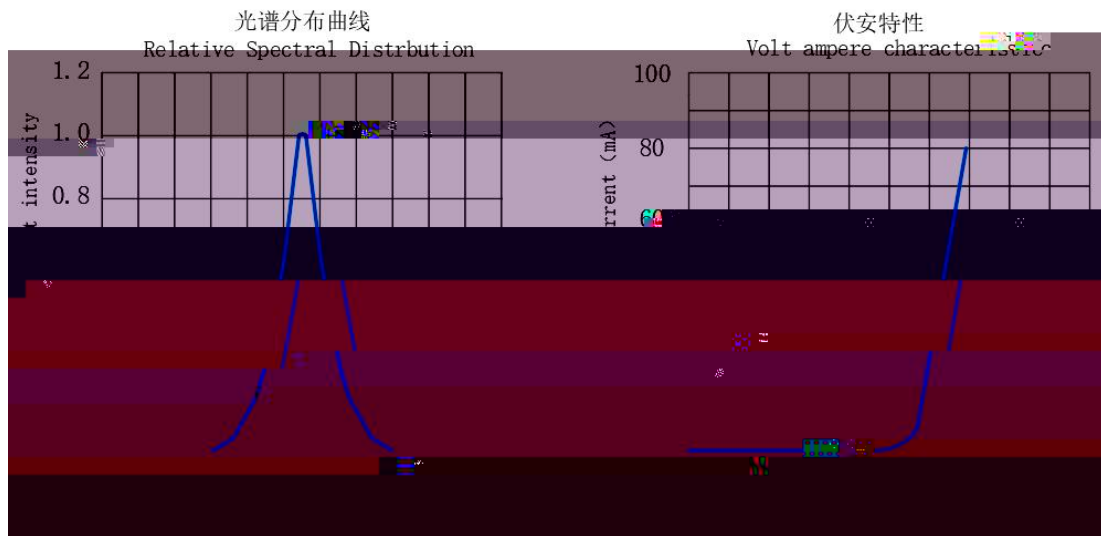



可靠性试验

Reliability Test Items And Conditions

J					


外形尺寸

Outline Dimension

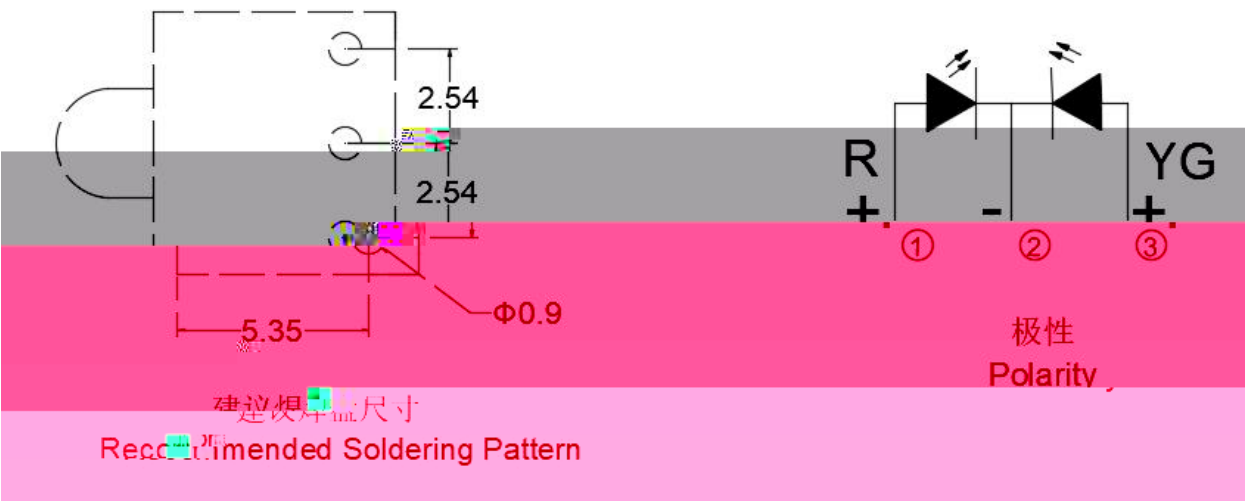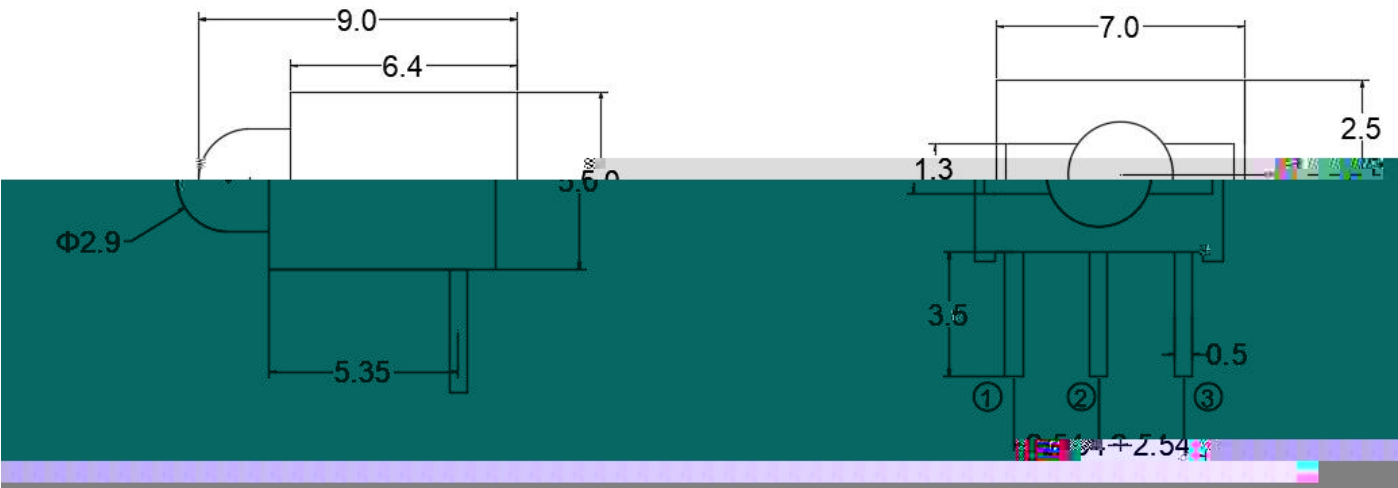

包装

Packaging

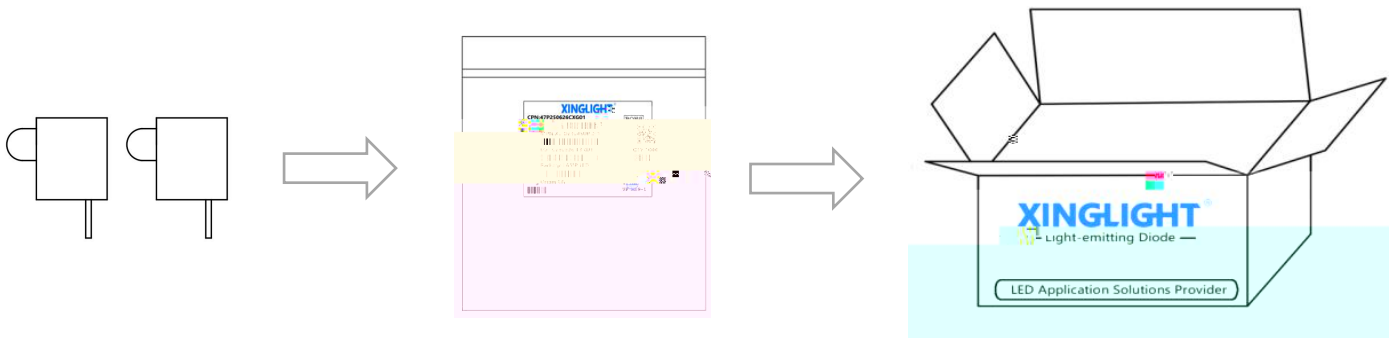

标签说明 Label Explanation..

CPN: 批号/档位 LOT: 日期/封装颜色

MPN: 型号 VF: 电压代码

WL: 波长代码 IV: 亮度代码

ORIGIN: 产地 QTY: 数量

PACKAGE: 封装






使用注意事項 (2)

Precautions (2)

設計建議

Design Consideration

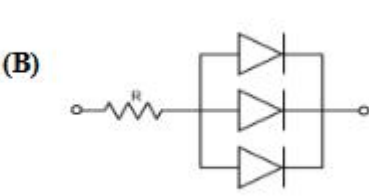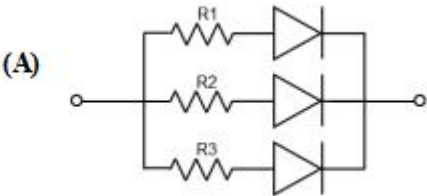


使用注意事项目 (3)

Precautions (3)

4、其他事项:

Others



5、眼睛保护忠告:

Safety Advice For Human Eyes

