



正白光 贴片式发光二极管

特点



L/W/H :3.8*0.6*1.0mm

Outline Dimensions (L / w / h): 3.8*0.6*1.0 mm

: /

Luminous color and colloid: High brightness white/ Yellow colloid

ROHS

Environmental protection products Complied With ROHS Directive

* MSL :3

Moisture sensitivity level MSL : 3 levels

EIA

EIA standard packaging

Suitable for SMT automatic production

Suitable for reflow soldering process

应用领域（P ）：








Part No. :XL-3806UWC



典型特性曲线

Typical Characteristics Curves

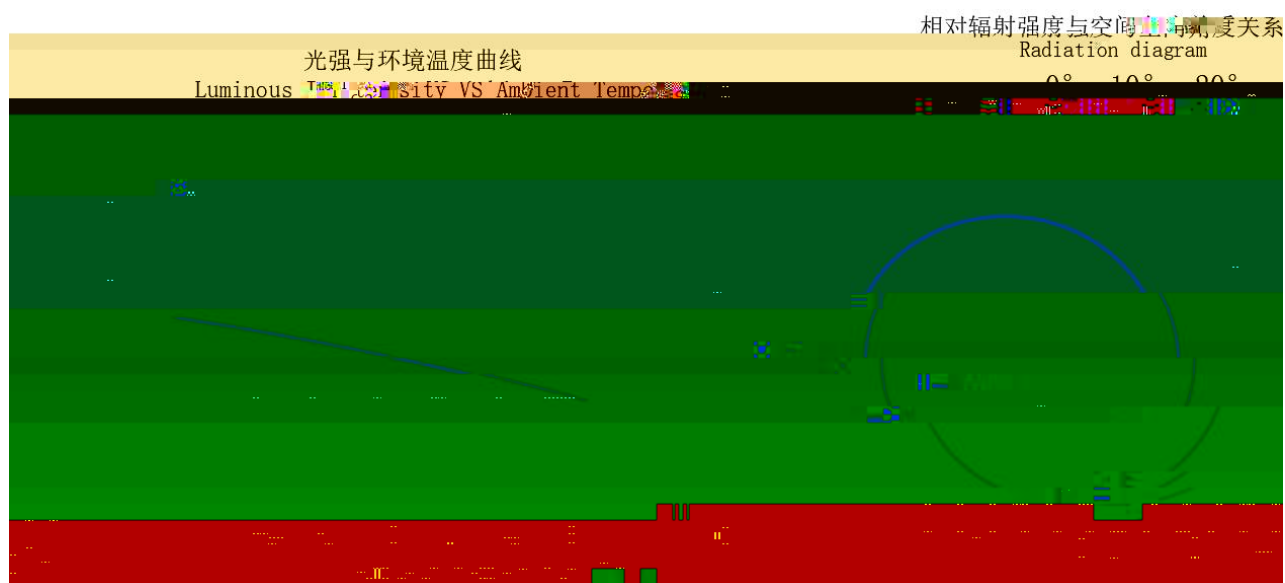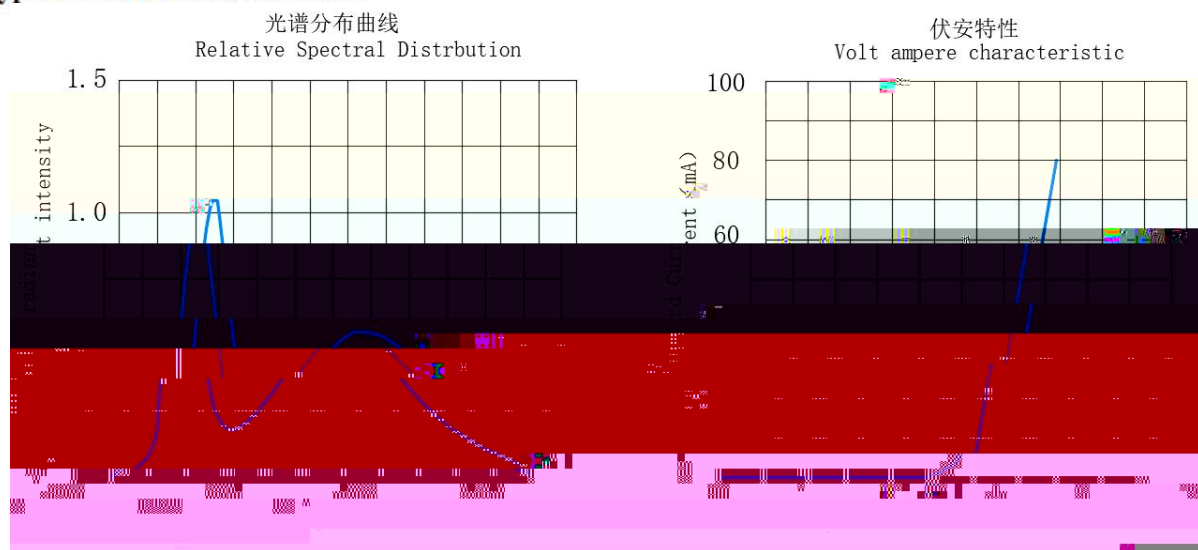

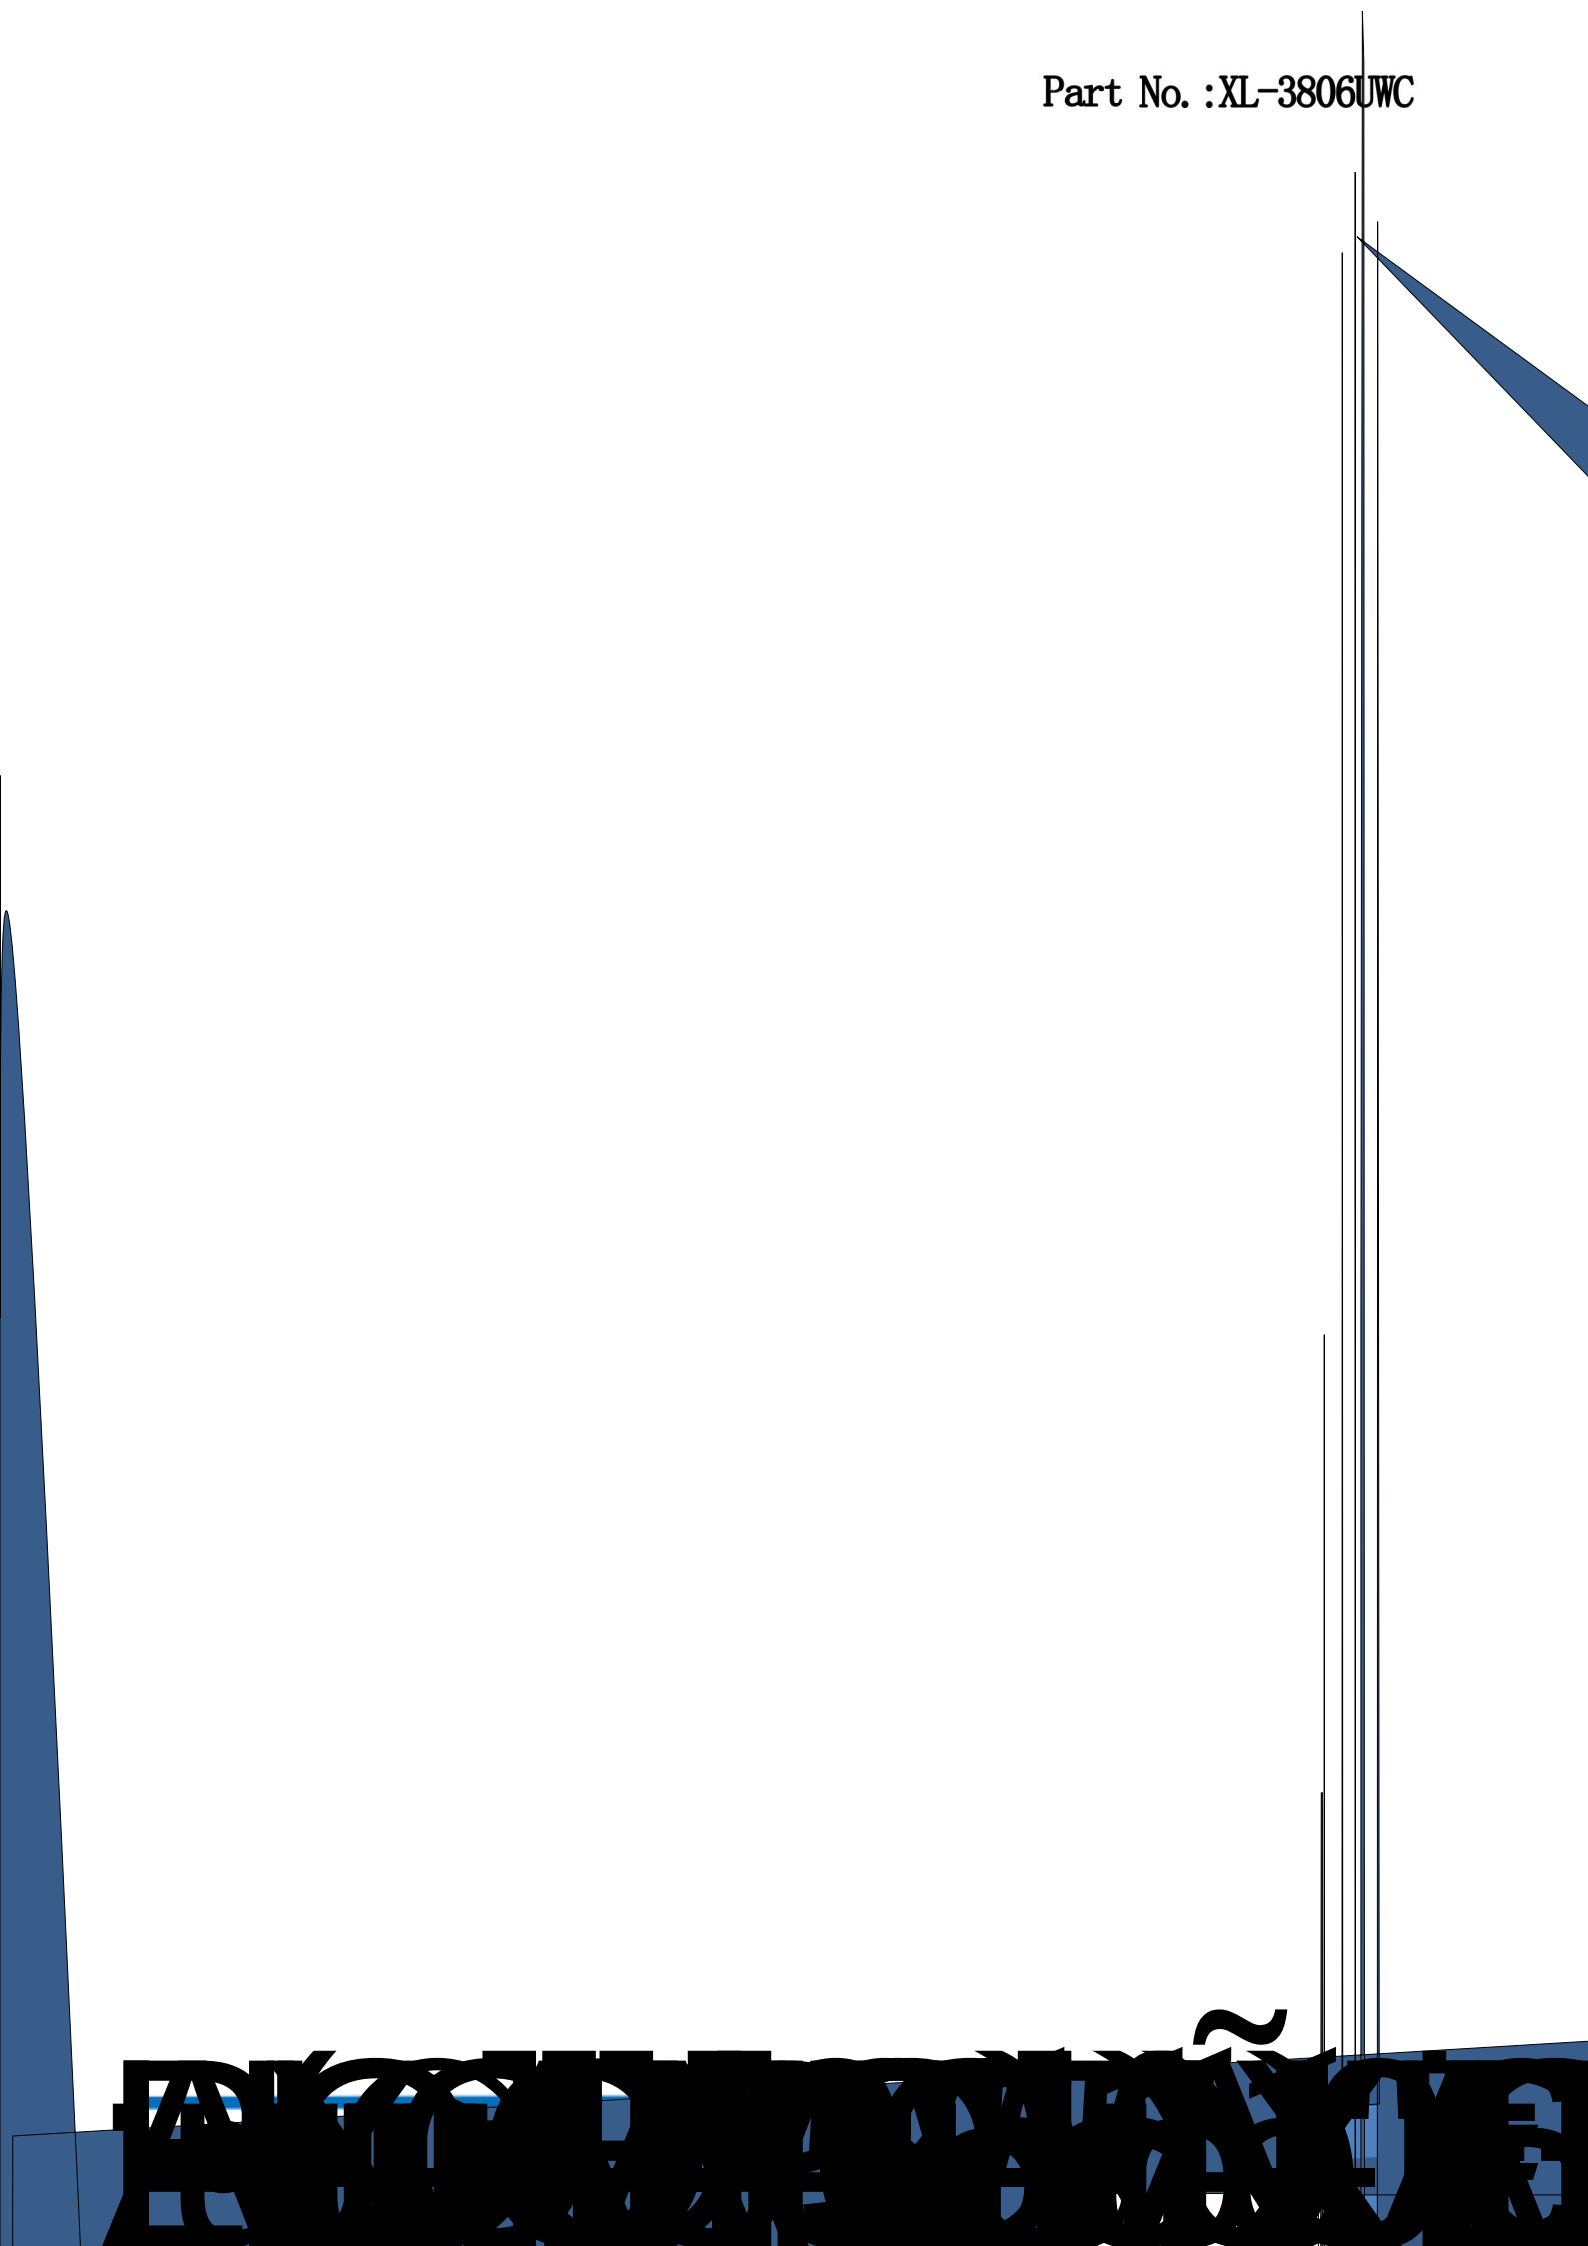






包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Anti-Electrostatic Foil Bag

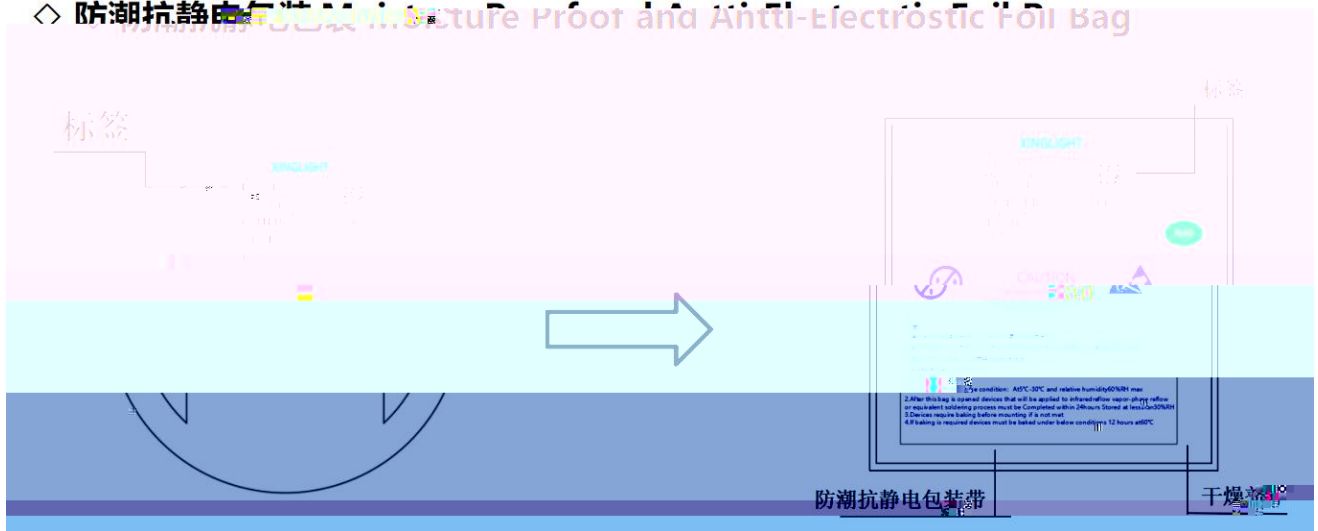

◇ 外包装箱 Cardboard Box

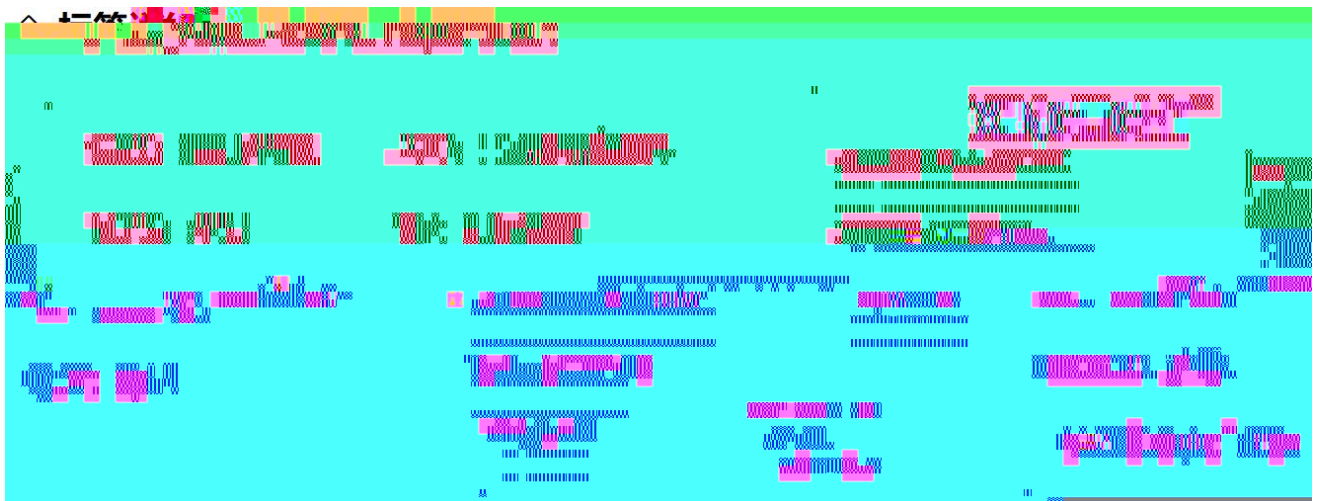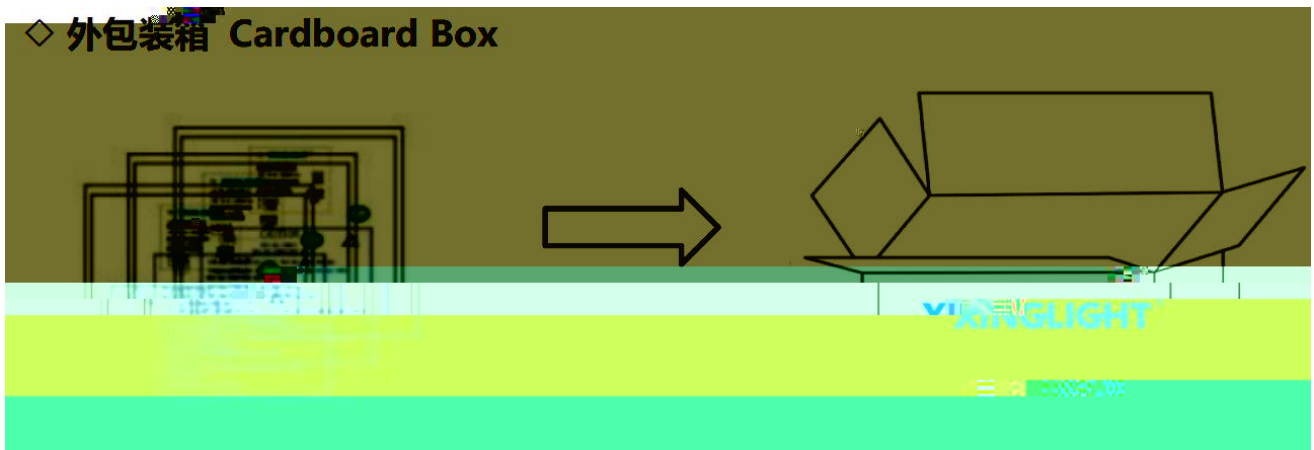

Part No. :XL-3806UWC

Part No. :XL-3806UWC





使用注意事项（3）

Precautions (3)

其他事项

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.