6070 [redacted] 1w） 发光二极管

特点（C ）：

* : /

Luminous color and colloid: High brightness white / Yellow colloid

* 6070

Packaging glue 6070 bracket

* 140

Luminous Angle 140 degrees

* ROHS

Environmental protection products Complied With RoHS Directive

* MSL :3

Moisture sensitivity level MSL : 3 levels

* EIA

EIA standard packaging

* SMT

Suitable for SMT automatic production

* ≤220

Suitable for reflow soldering process ≤220

应用领域（P ）：

* , ,

Building lighting, wall washing, and projection lights

* ,

Urban lighting, sculpture lighting

* stage lights;,

Billboard lighting

*

Exhibition, sports venues, shopping malls

*

mass transit

*

street lamps

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项

典型特性曲线

Typical Characteristics Curves

可靠性试验

Reliability Test Items And Conditions

Continuous Operation Test
Low Temperature Storage Test
High Temperature Storage Test
Moisture-proof Test
Thermal Shock Test

焊接指导（1）

Guideline for Soldering (1)

使用烙铁人手焊接

60W 300

3

LED

A soldering iron of less than 60W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering.

[redacted]

使用注意事项（2）

Precautions (2)

设[redacted]建议:

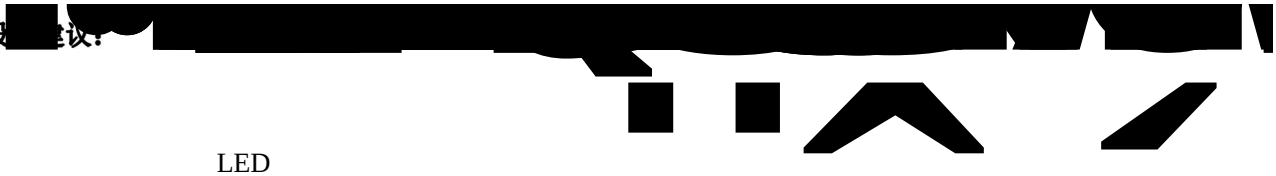

LED

A LED B

LED V_F LED

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for v מ T

O

XINGHUT®