电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Consumed power	Pd	R	50	mW
		G	70	
Peak Forward current	IFP	R	80	mA
		G	80	
Forward working current	IF	R	20	mA
		G	20	
Reverse voltage	VR	R	5	V
		G	5	
Antistatic ability	ESD	2000		V
Operating ambient temperature	Topr	-40 ~ +85		
Storage ambient temperature	Tstg	-40 ~ +85 C		
Welding conditions	Tsol	reflow soldering 260℃ 6s manual welding 300℃ 3s		

* ≤0.1ms ≤1/10

* Note: Pulse width ≤ 0.1ms, Duty ≤ 1/10

典型特性曲线

Typical Characteristics Curves

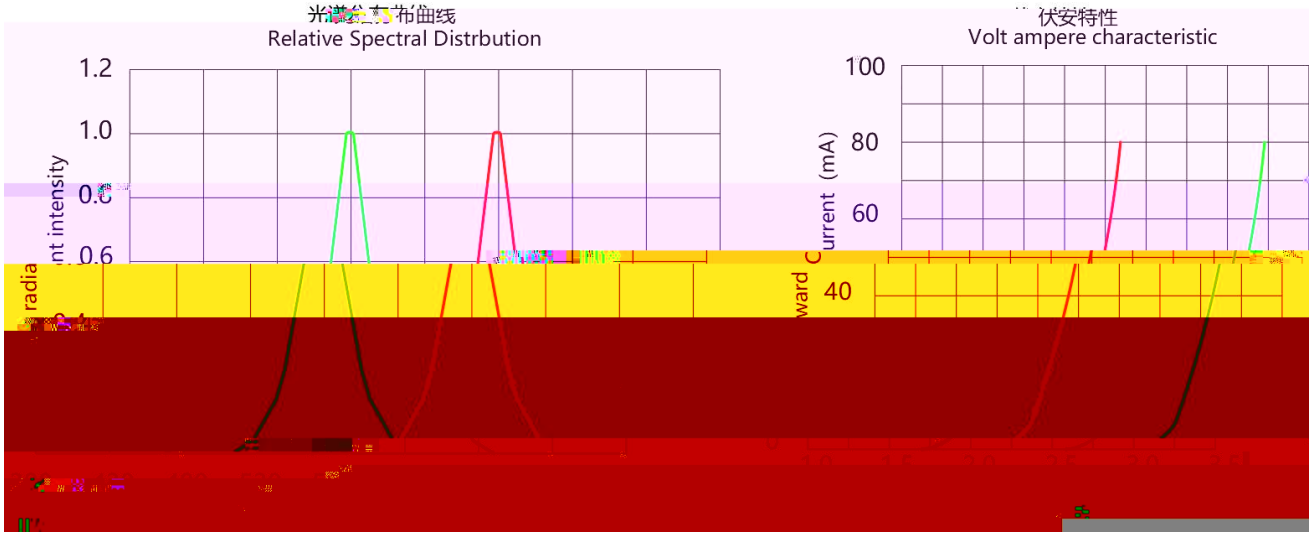

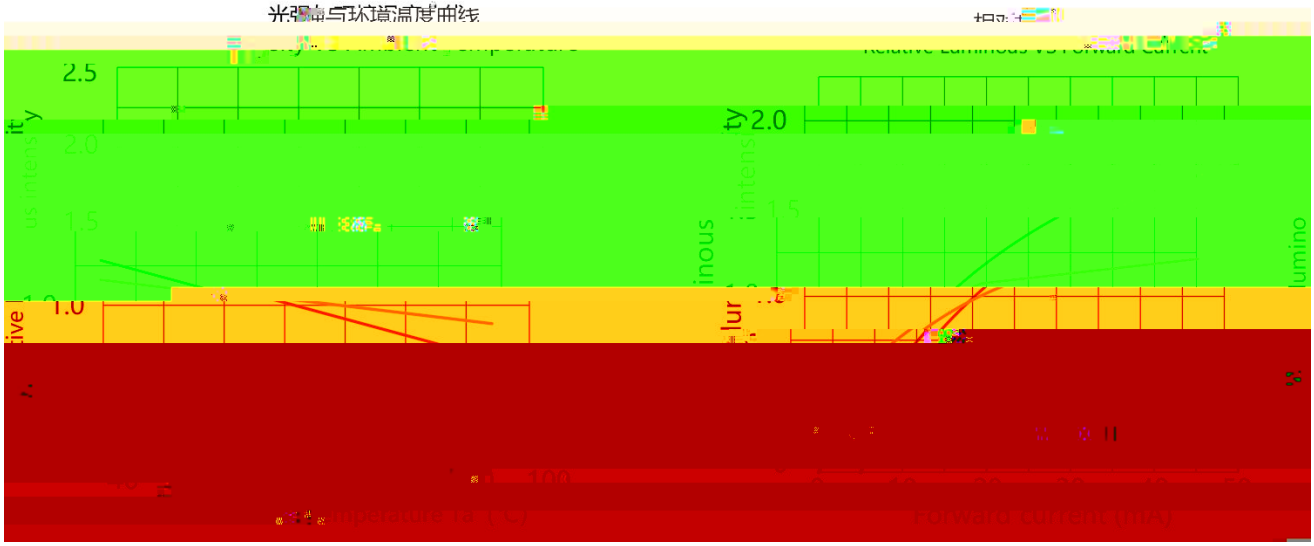

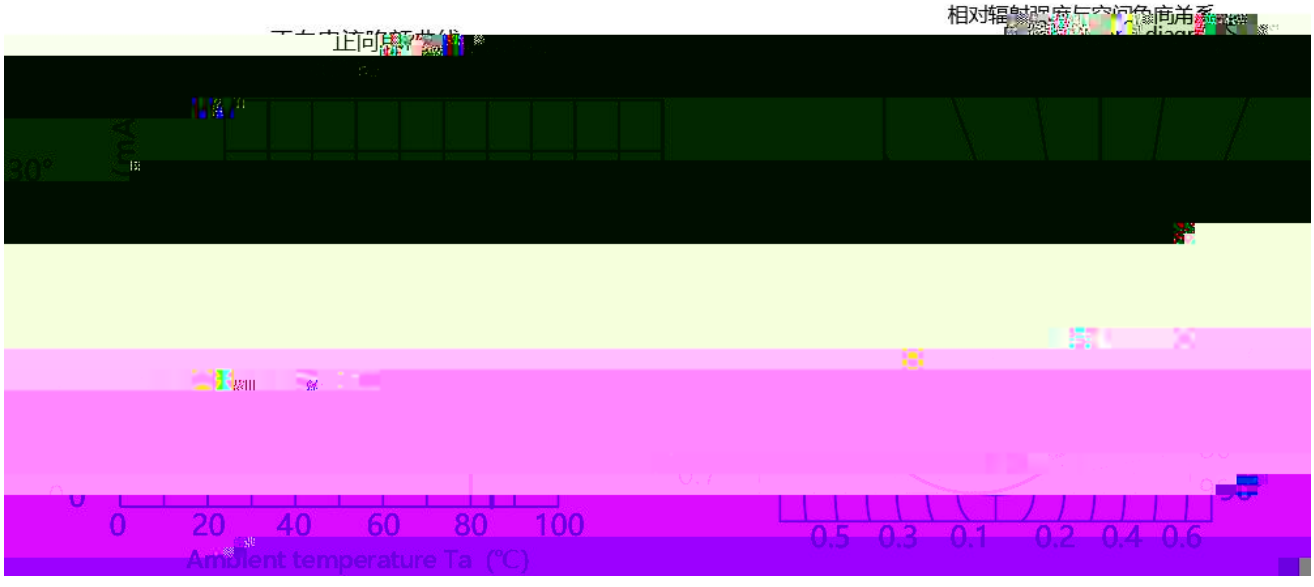

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

Part No.:XL-3210S-RUC