


技术数据表

特点（



目录

Catalogue




电性参数





Max Continuous Forward Current	IF		



Luminous Intensity Iv 200 400 900 m




典型特性曲线

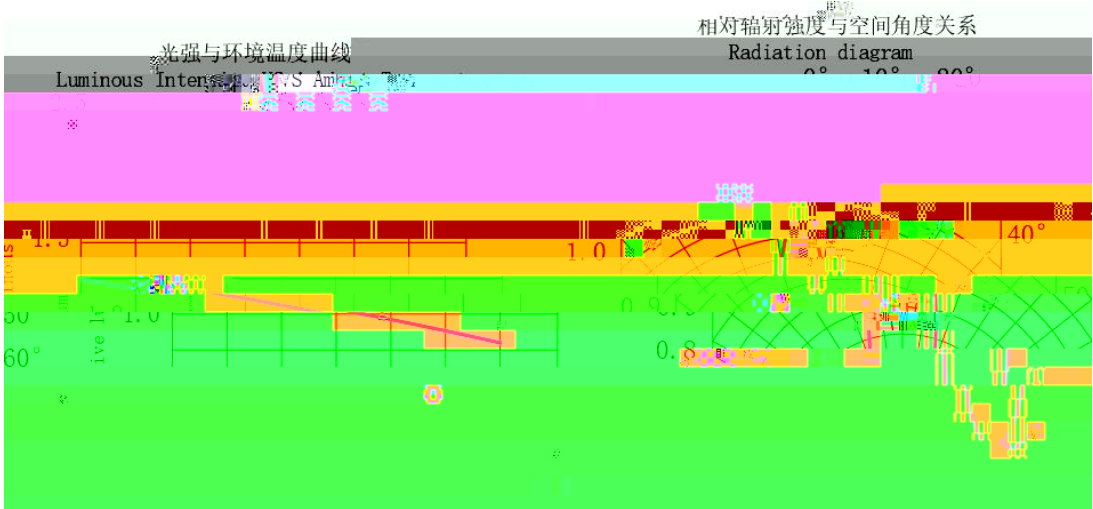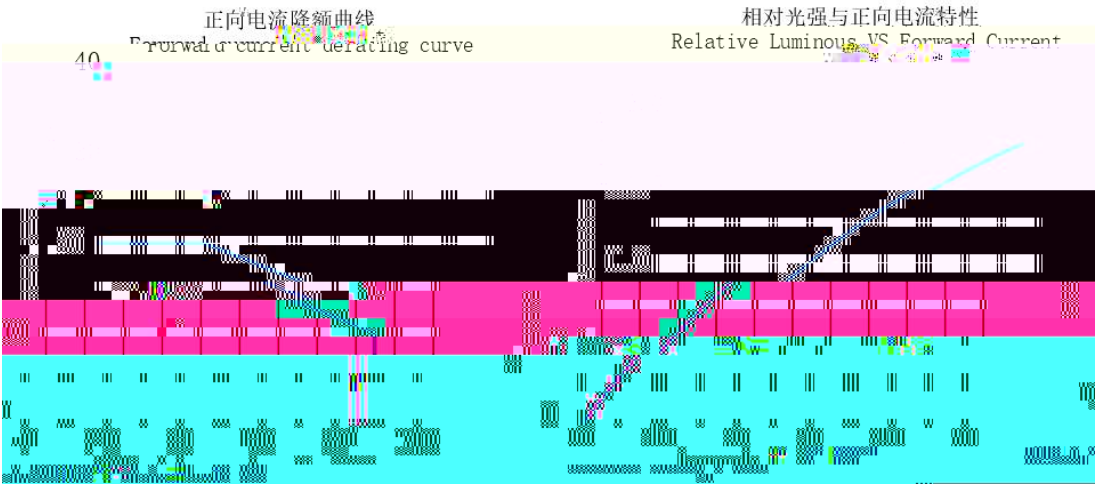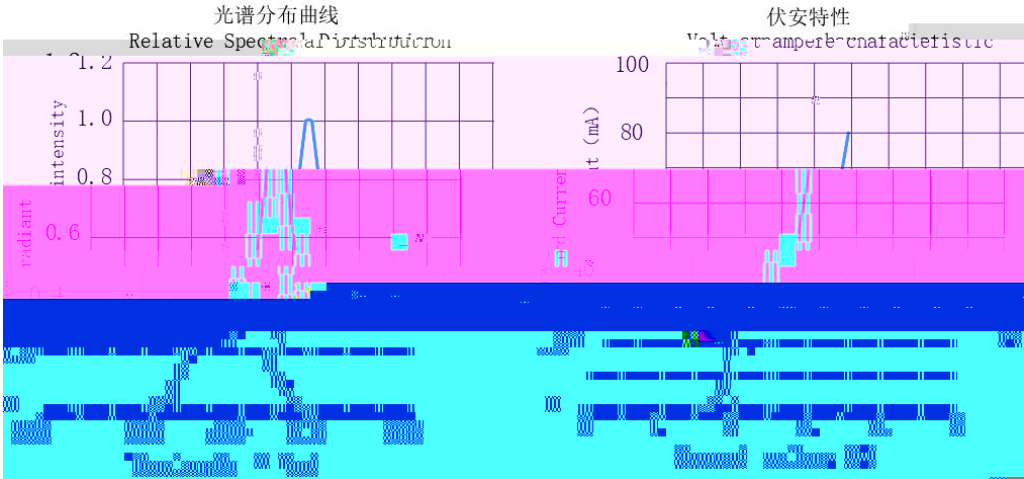


可靠性试验

Reliability Test Items And Conditions

	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
Endurance test	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
	Cold and hot cycle	100 ± 5 30mins 5mins -40 ± 5 30mins	100 Circles	22 PCS	0/1
Environmental testing	Hot and cold impact	105 ± 5 5mins -45 ± 5 5mins	100 Circles	22 PCS	0/1
Mechanical					
N2					




外形尺寸

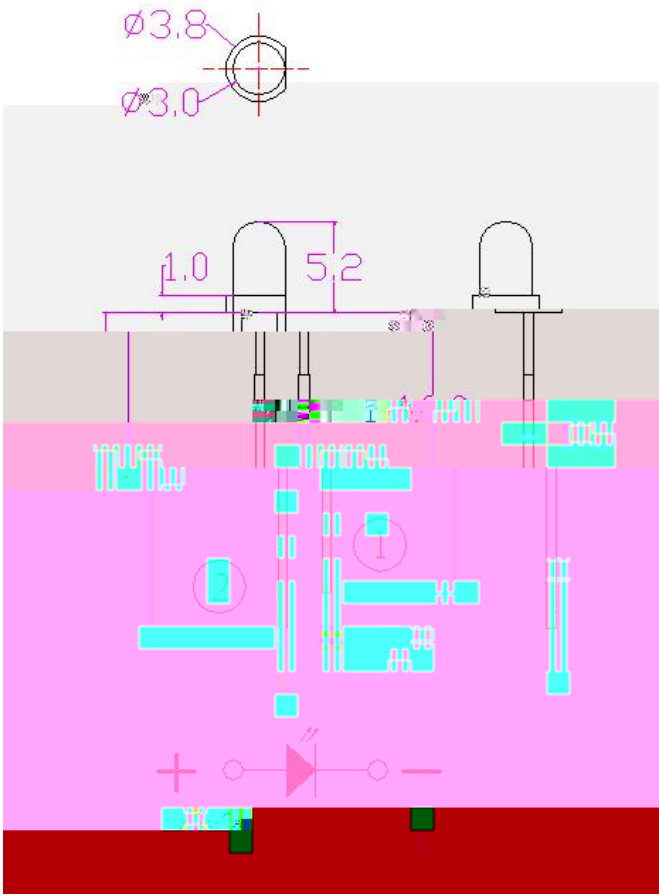


1.

2. mm .





包装

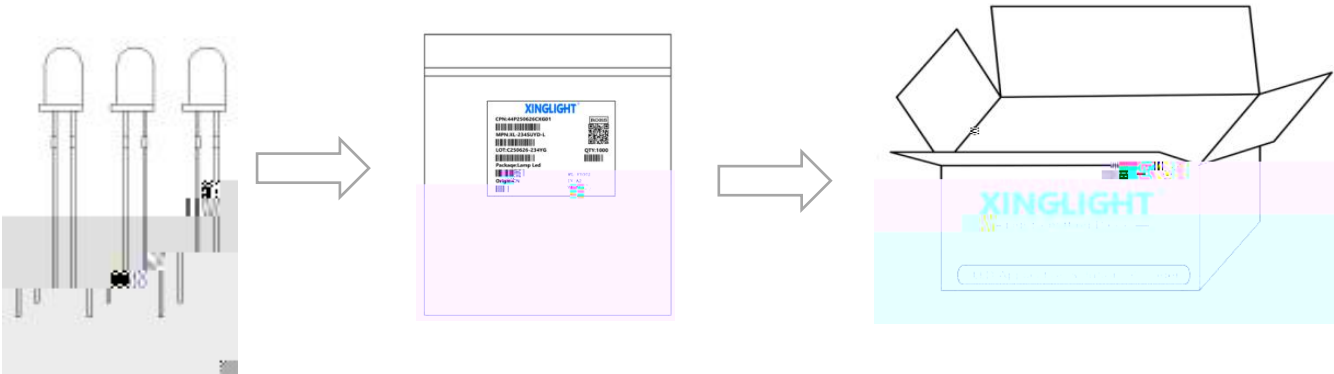

标签说明 Label Expantion

CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
WL: 电压/功率	QTY: 数量
PACKAGE: 封装	

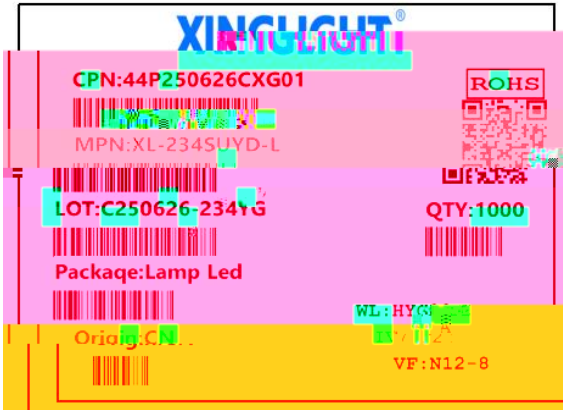



使用注意事項 ()

LED


LED 30 70% LED

3

LED

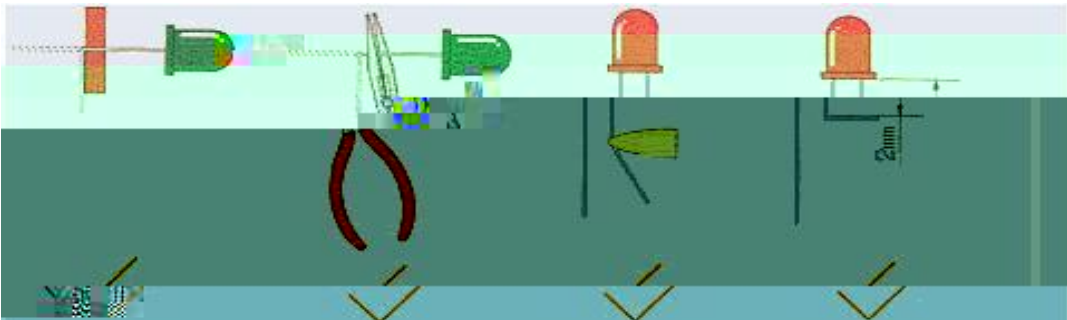

使用注意事項 ()



使用注意事项目 ()

8、其他事项:

*

*