




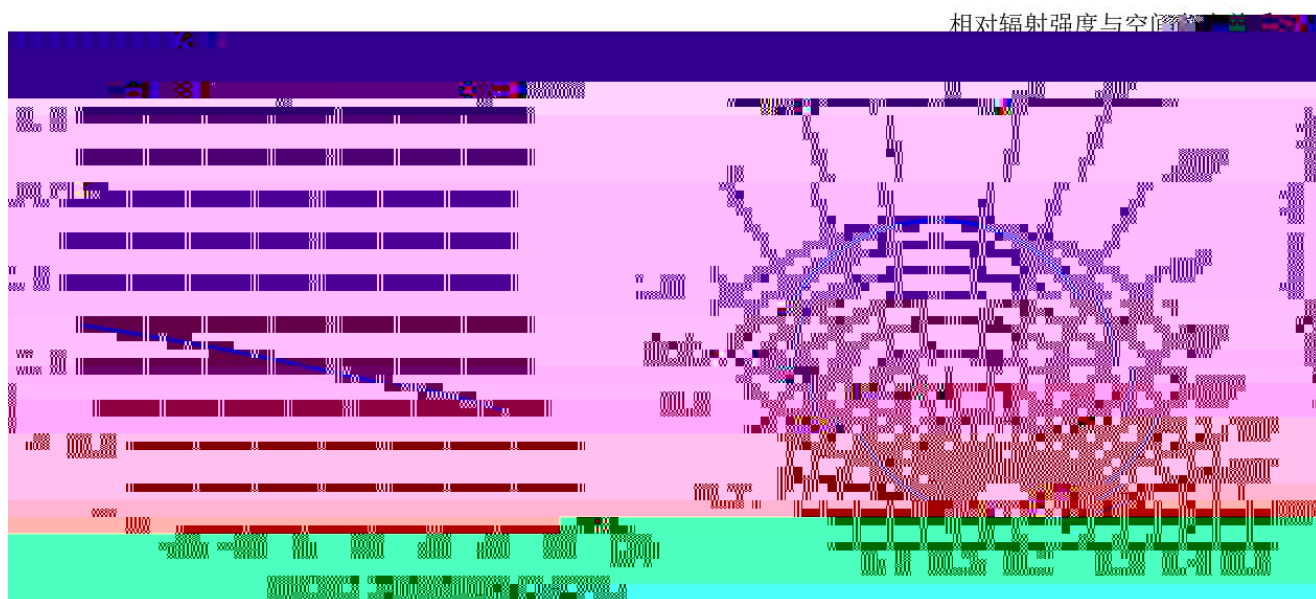

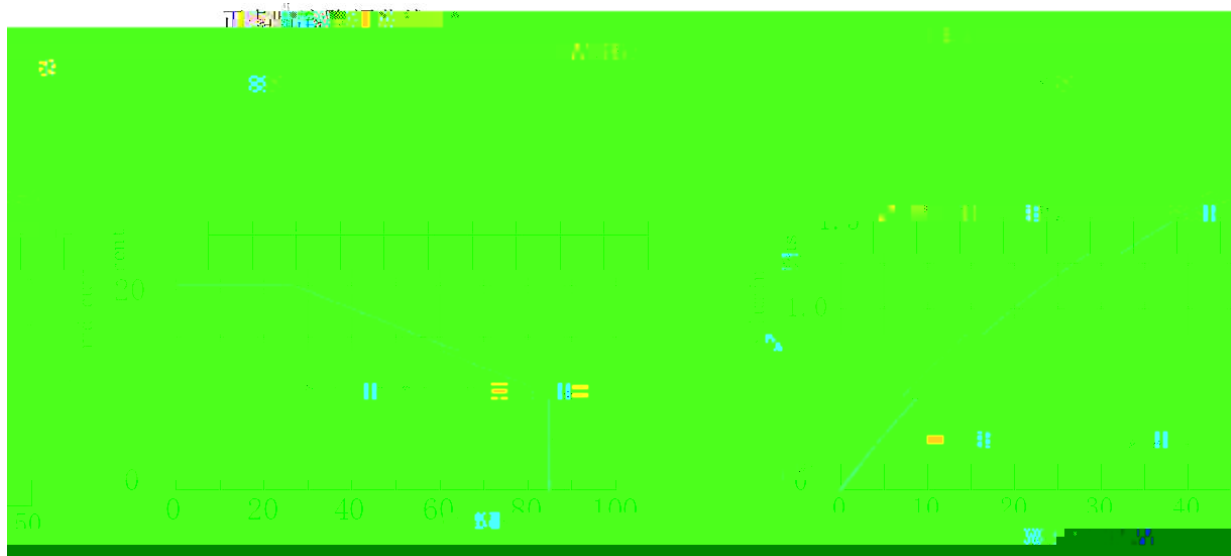

典型特性曲线

Typical Characteristics Curves

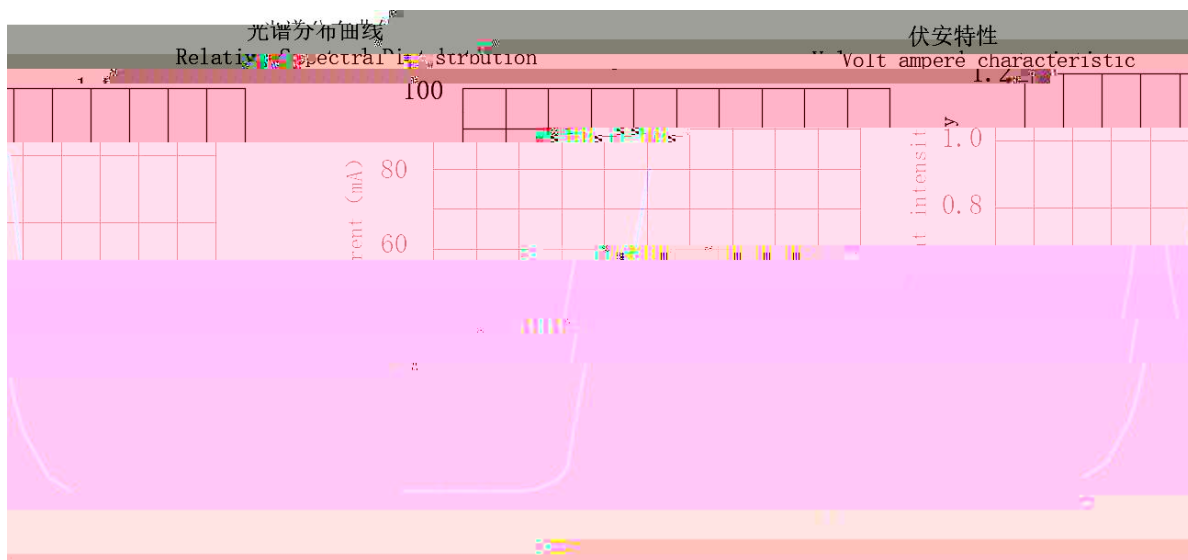

可靠性试验

Reliability Test Items And Conditions

Working life	20mA	Continuous lighting at the maximum rated current at room	1000	1000 hours	MIL-STD-750D:1026
High temperature and high humidity test	IR-Reflow In-Board, 2 Times	Ta= 85±5 , RH= 90 95%	240	240hours	MIL-STD-202F:103B
Endurance test	High-temperature storage	Ta= 85±5	1000	1000 hours	MIL-STD-883D:1008
Low temperature	Low temperature	Ta= -40±5	-24	+72)	JIS C 7021:B-10
Cold and Hot cycle	Cold	105	25	-55	25
Hot and cold impact	IR-Reflow In-Board, 2 Times	100± 5	100	100 Circles	MIL-STD-202F:107D
Anti-tin test	Hot and cold impact	-40 ± 5	20mins	20mins	MIL-STD-883D:1010
Infrared	T.sol= 260 ± 5	10 ± 1secs	2	2times	MIL-STD-202F:210A

GypwRX








包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Anti-Static Foil Bag

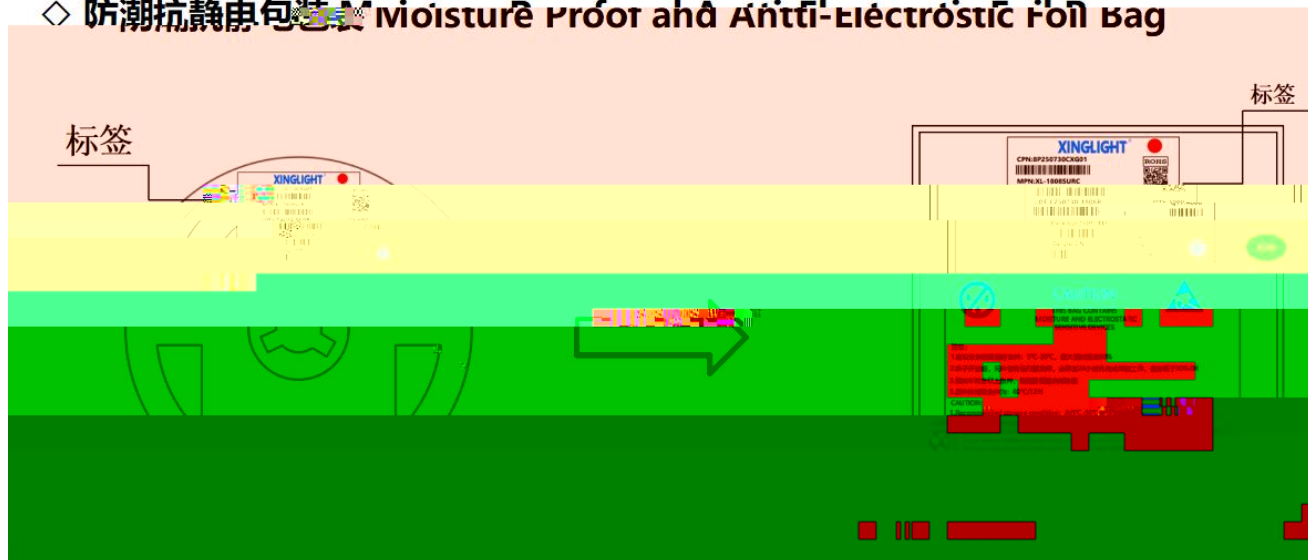

◇ 外包装箱 Cardboard Box



◇ 标签说明 Label Expansion

