Part

典型特性曲线

Typical Characteristics Curves

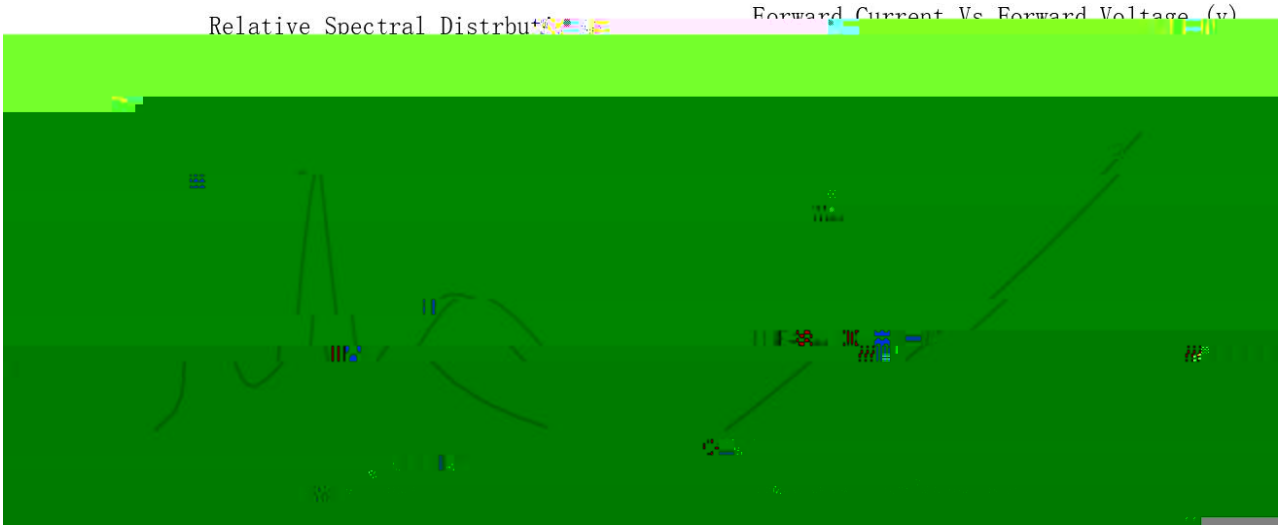

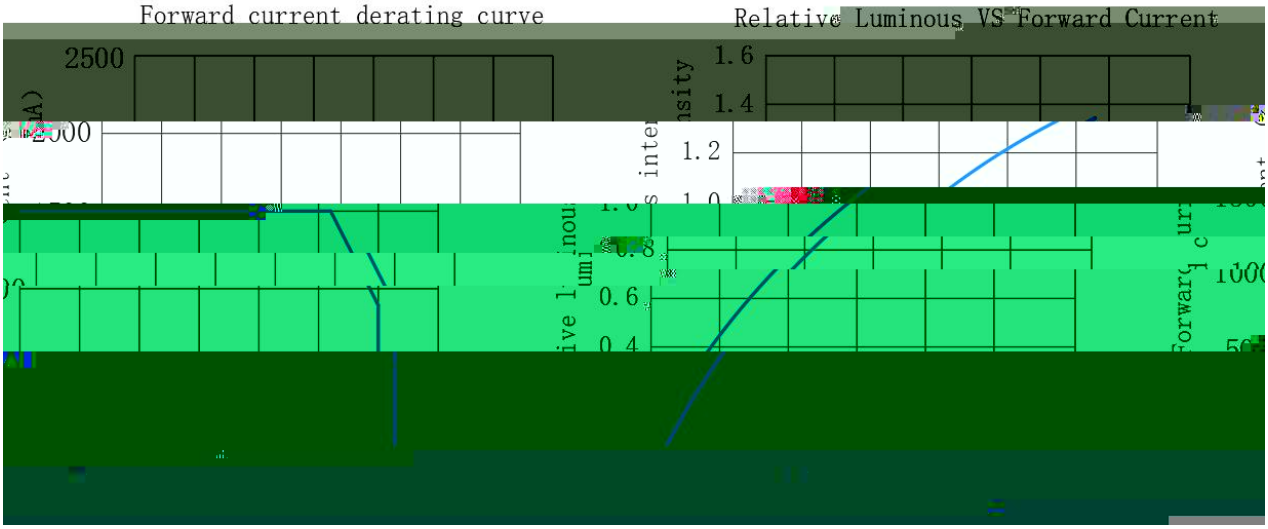

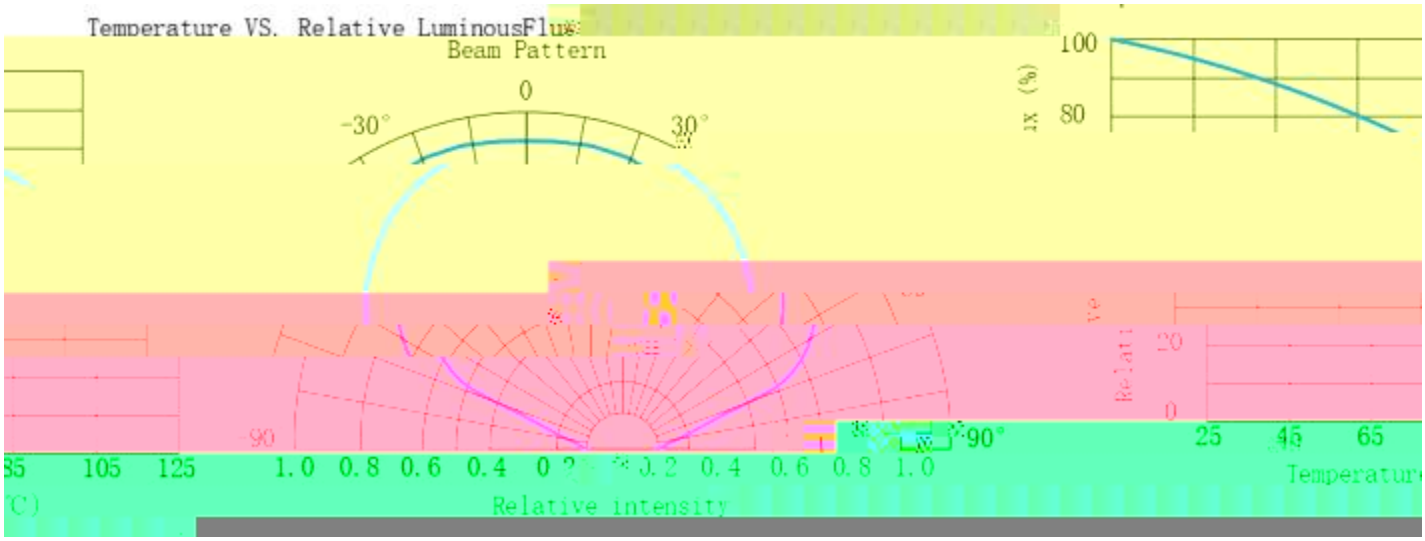

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

XINGSHENG®

Pa

可靠性试验

Reliability Test Items and Conditions

Class	item	Testing environment

焊接指导（2）

Guideline for Soldering (2)

3. 清洗：

Cleaning

30 50

30

LED

300W LED

LED

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 for 3 minutes or 50 for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher than 300W. Before cleaning, a pretest should be done to confirm whether any damage to LEDs will occur.

* **注意：** PCB

PCB

* **Note:** This g[redacted]

Part

Part