

目录

Catalogue

Electrical Characteristics.....3

Typical Characteristic Curves.....5

Reliability Test Items And Conditions.....6


Outline Dimensions.....7

Packaging.....8

Precautions.....9

电性参数

Electrical Characteristics

Absolute Maximum Ratings		Ta=25		
Parameter	Symbol	Red	YG	Unit
				

亮度分档:
Brightness grading:




代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
A2				

电压分档:
Voltage grading:

波长分档:
Wavelength grading:

典型特性曲线

Typical Characteristics Curves

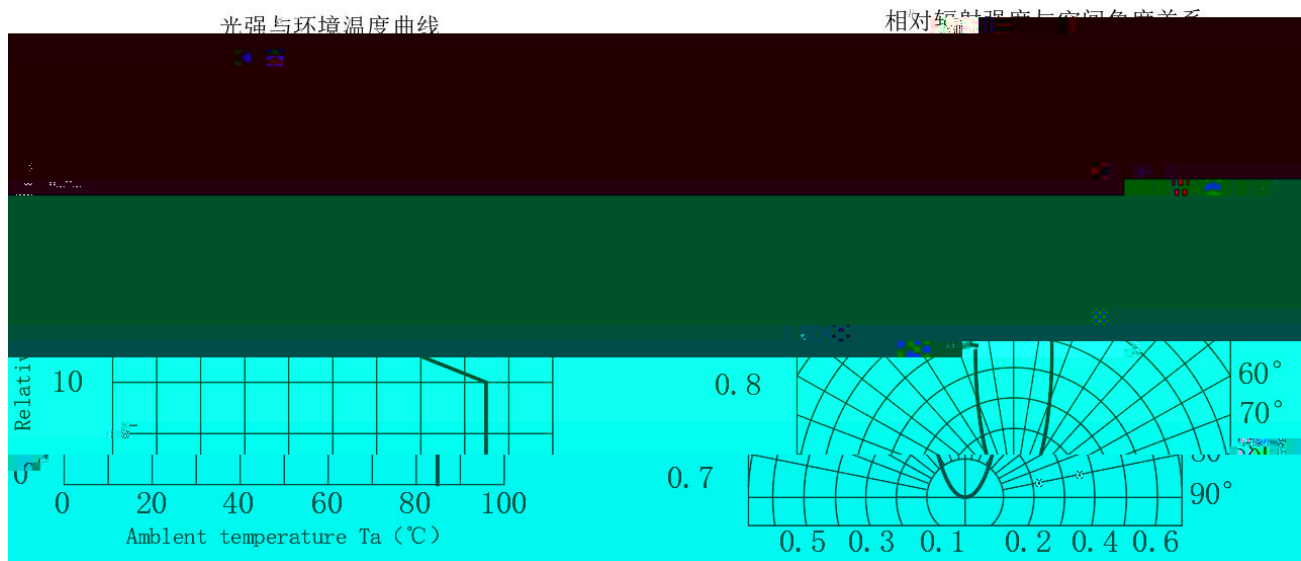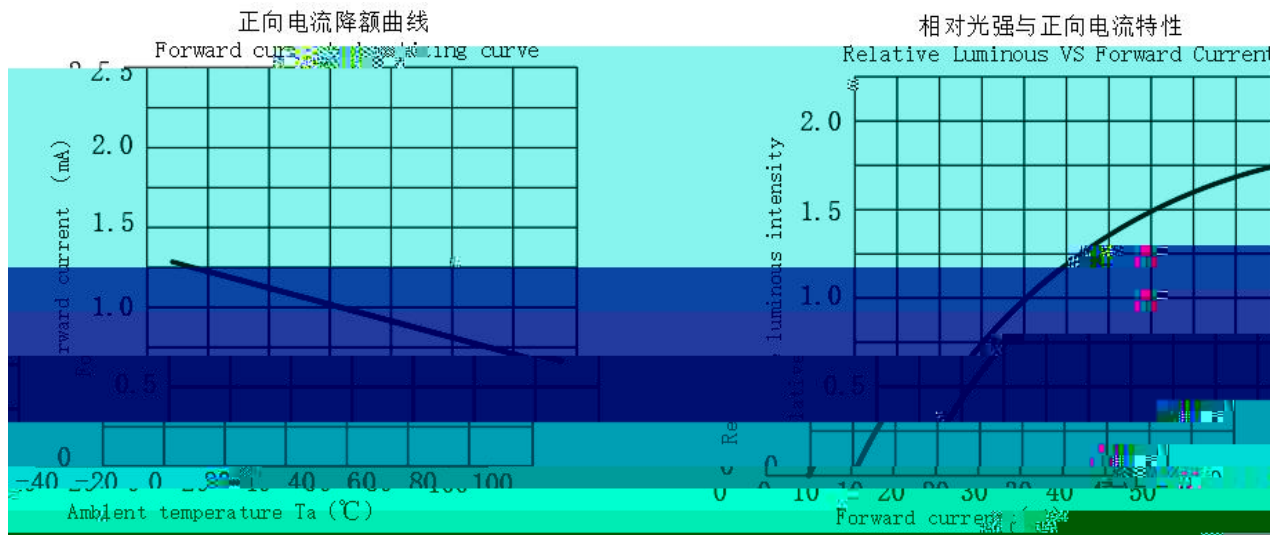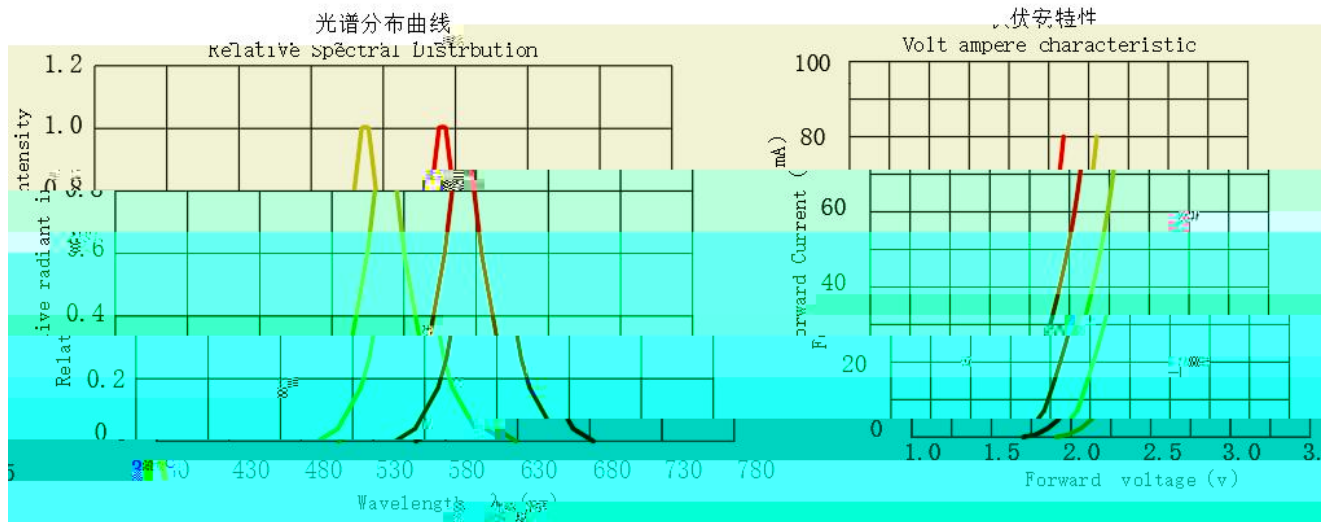

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
Endurance test	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1

外形尺寸

Outline Dimension

- (Note)
- 1. Dimensions are in millimeters.
 - 2. Toleran $\pm 0.50\text{mm}$.

包装


Packaging

*

In Bags

*

Moisture Proof and Anti-Electrostatic Foil Bag







使用注意事项 (3)

Precautions (3)

4、其他事项:

Others

*

*When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics.