6070[redacted](3W)[redacted]发光二极管

特点[redacted]C

[redacted]：

应用领域（P[redacted]）：

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项

光电参数 Ta=25 (ta=25)

ǎ	ˊ	ὃ ᾠ

	γ β	
	LM	IF=350mA

	γ β	

典型特性曲线

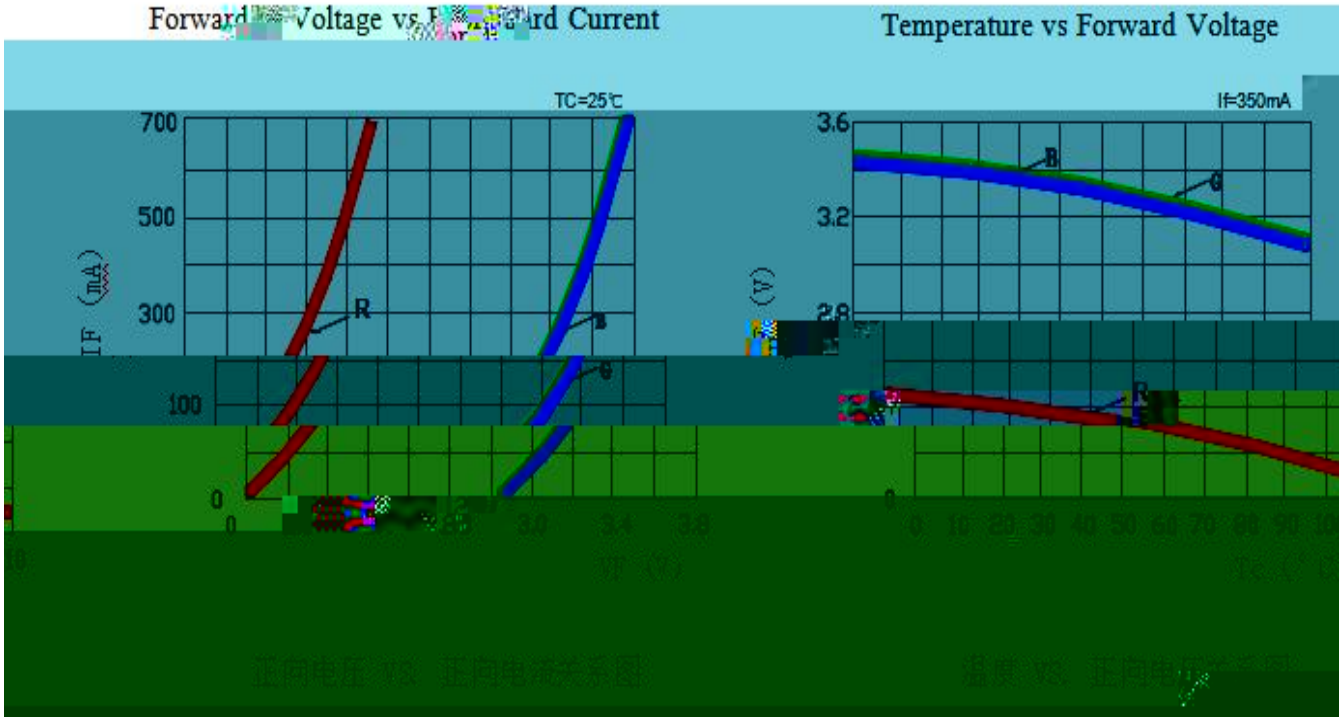

Forward Current vs Relative Luminous Flux

Temperature vs Relative Luminous Flux



外形尺寸
Outline Dimension

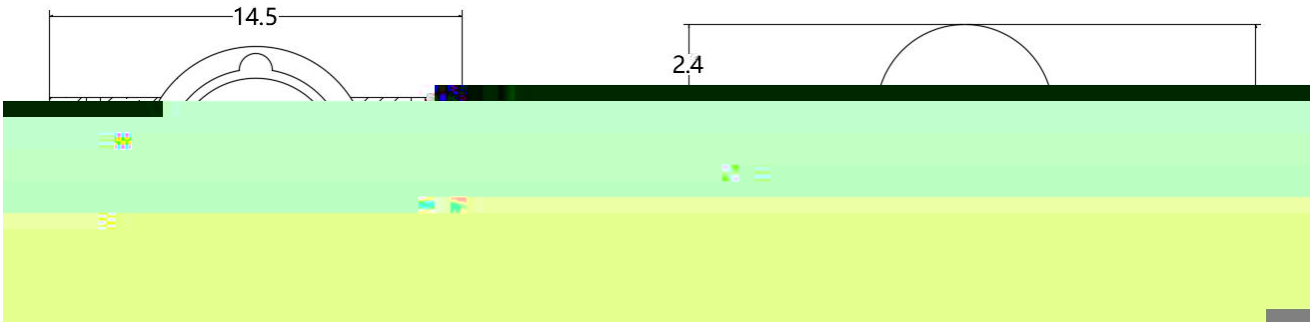

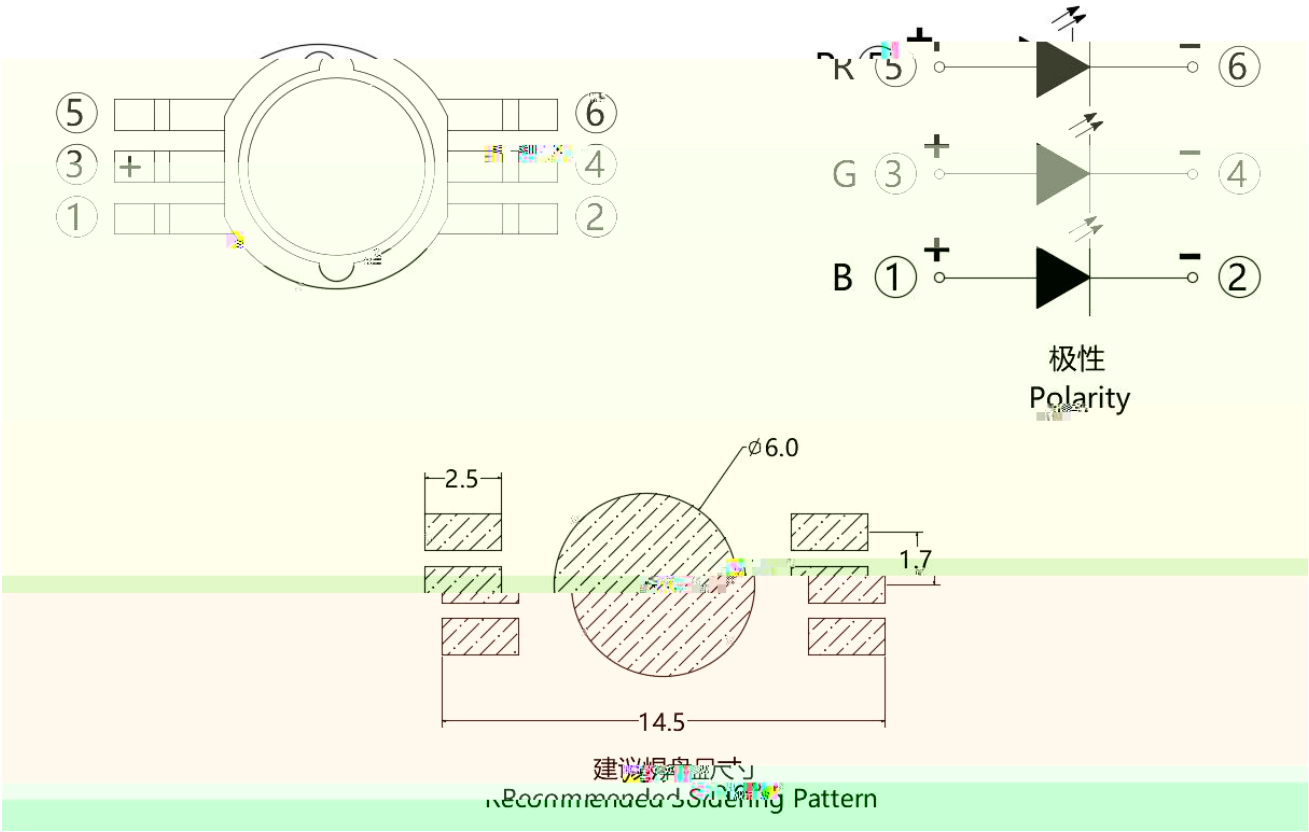

Remarks:
1. [illegible] mm
All dimensions are in millimeters.

2. [illegible] ±0.25mm
Tolerance is ±0.25mm unless otherwise noted

使用注意事项（1）

Precautions (1)

使用注意事项（ ）

ŭ ج p ~ غج ج أ ٦ ع ~ ذ ṗ
غ غج ~ ج ٧ ٦ ع ≠ ج p عجضي

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED № ~ ط r ⌂ № ض ŭ
Ṝ

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

眼睛保护忠告

LED ŭ ۏ ~ ŭ ۏ ۏ ≠ ۏ LED ۏ ٮ

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.