

店主新术店

* L/W/H :F5/5.8*5.0*8.7*28mm
Appearance dimension (L / w / h): F5/5.8*5.0*8.7*28mm

* Environmental protection products meet REHS requirements

* EIA
EIA standard packaging



目录

Catalogue

目 录 ...

电性参数

亮度分档

:

代码	最小值	最大值	单位
----	-----	-----	----

电压分档




:

波长分档

:



典型特性曲线

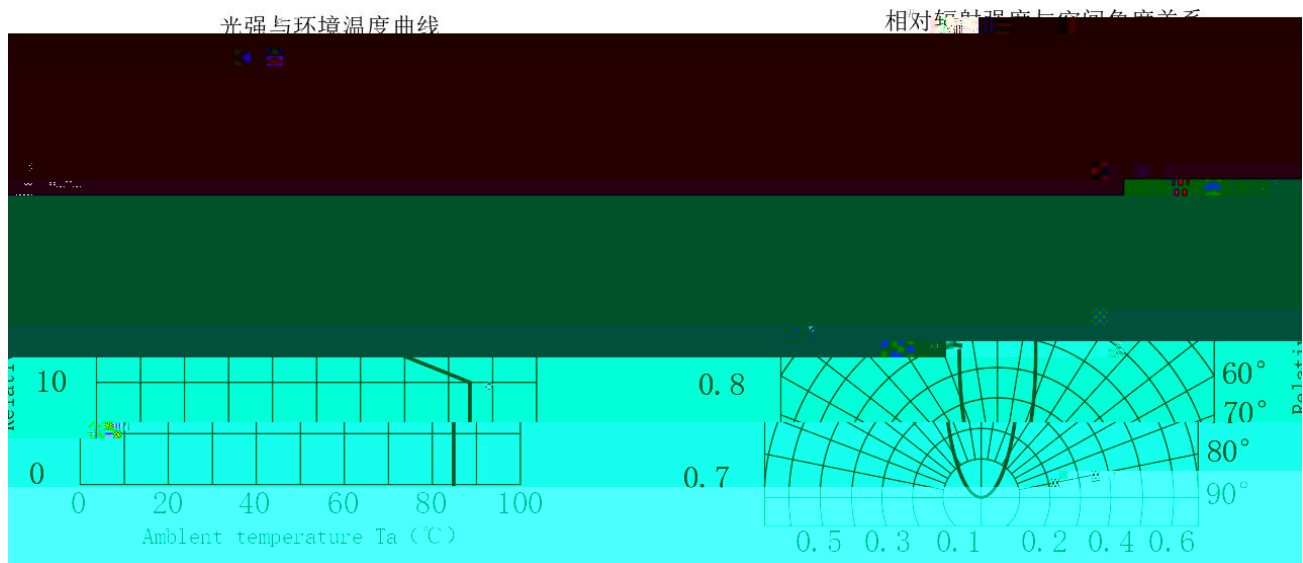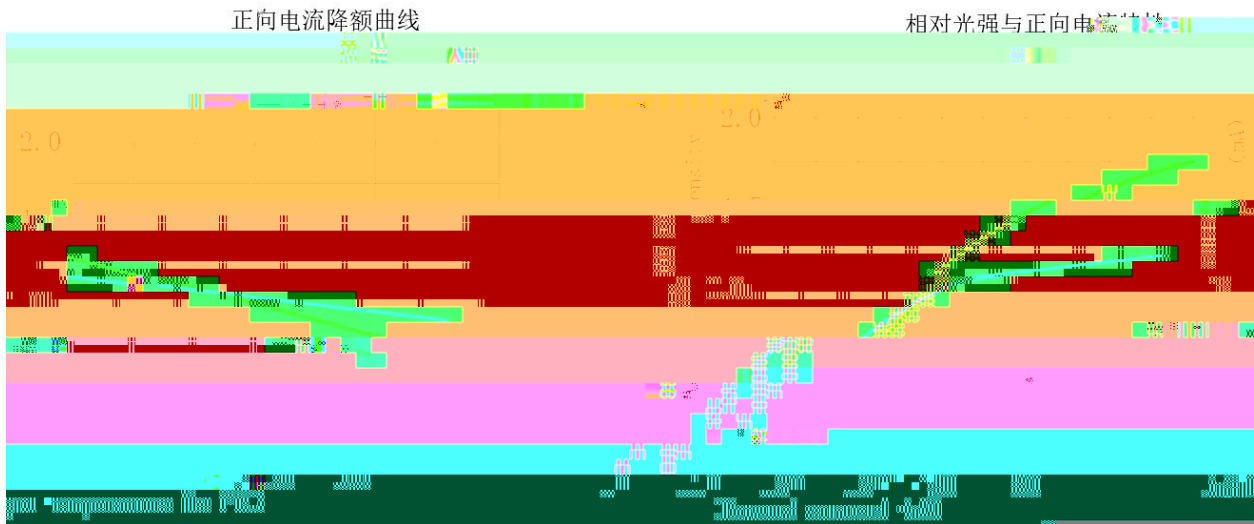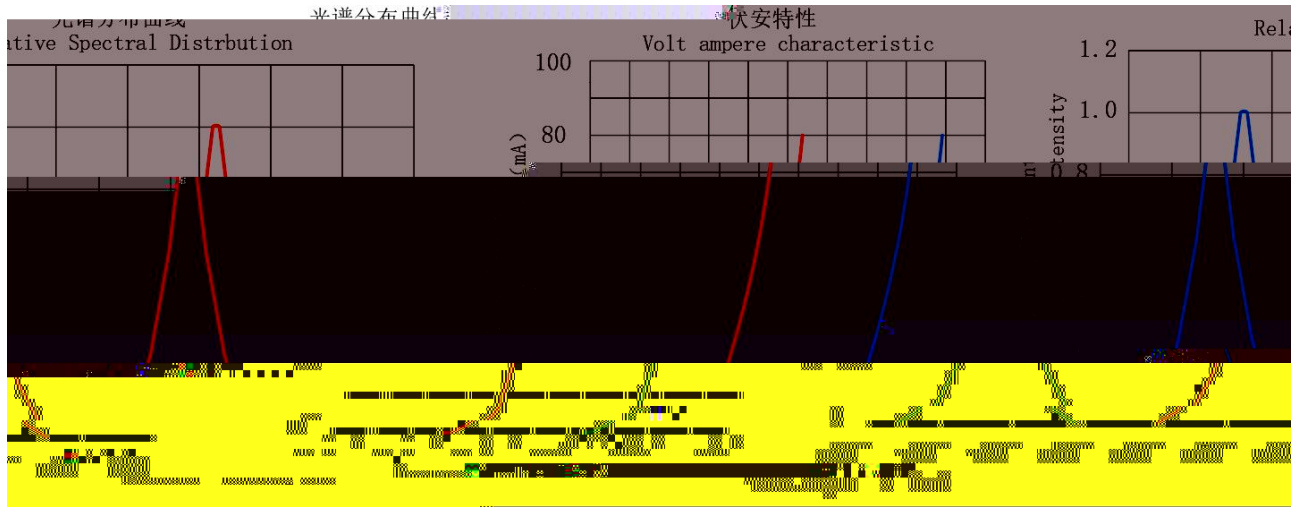

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
-------	-----------	---------------------	--------------	-----	----------

Endurance
test

外形尺寸



- (Note)
- 1. Dimensions are in millimeters.
 - 2.

00 ā


包装

*

In Bags

*

Moisture Proof and Anti-Electrostatic Foil Bag



使用注意事項 (1)

1.

LED

LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some h

使用注意事項 (2)

Precautions (2)

2mm LED
LED

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

LED LED A LED LED

In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.

使用注意事項 (3)

Precautions (3)

4、其他事項：

*