

XL-302UGC

F3

光通量: 1.5lm

特点 () :

- * : F3/3.8*3.0*5.2*18mm
- Appearance dimension: F3/3.8*3.0*5.2*18mm
- * : /
- Luminous color and colloid: green brightness White /water colloid
- * ROHS
- Environmental protection products meet ROHS requirements
- * MSL :2

*


*

*

*

应用领域 () :

- * ;
- Home appliances, digital, communication
- * Automotive Electronics
- * Lighting decoration
- * electronic toy
- * electronic clock
- * Traffic instructions
- * Medical beauty instruments
- * Electronic teaching equipment
- * Urban lighting




目录

Contents



电性参数



亮度分档

:

代码	最小值	最大值	单位	测试条件


电压分档

:





代码	最小值	最大值	单位	测试条件

波长分档

代码	最小值	最大值	单位	测试条件




典型特性曲线

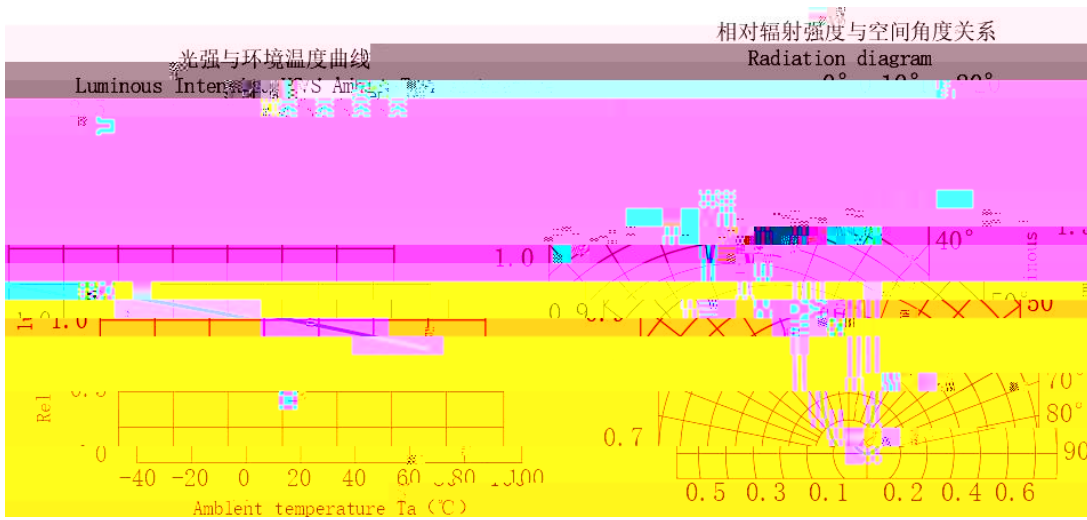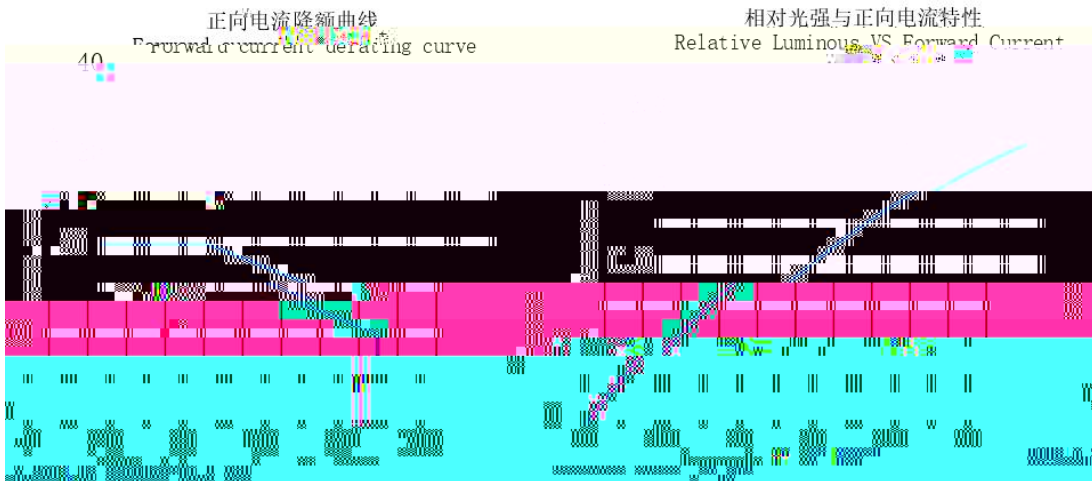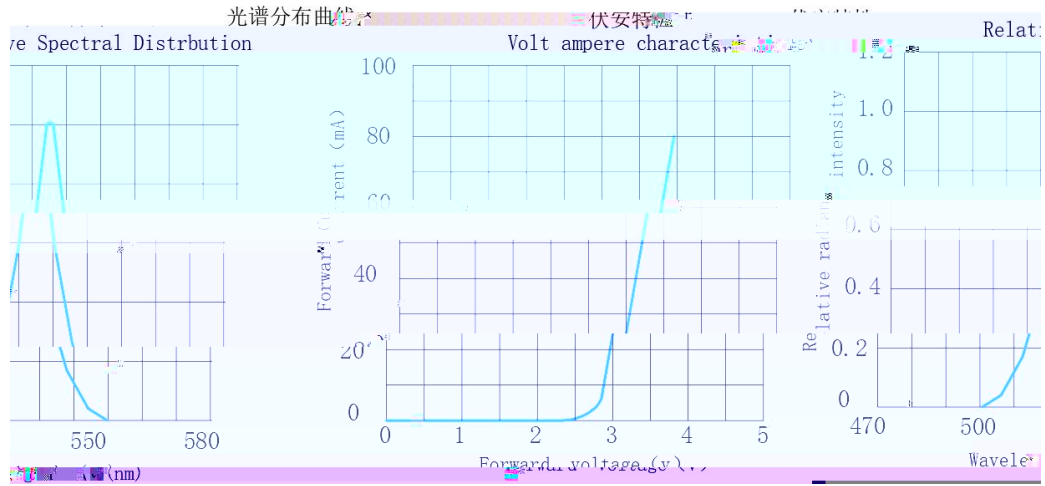


可靠性试验

Reliability Test Items And Conditions

	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
Endurance test	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
	Cold and hot cycle	100 ± 5 30mins 5mins -40 ± 5 30mins	100 Circles	22 PCS	0/1
Environmental testing	Hot and cold impact	105 ± 5 5mins -45 ± 5 5mins	100 Circles	22 PCS	0/1
Mechanical					
N2					




外形尺寸

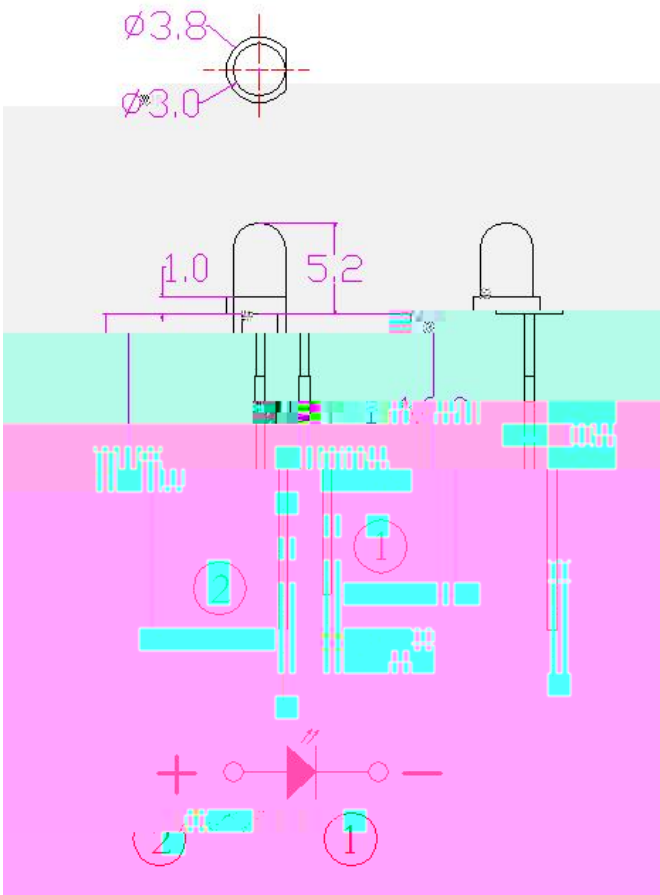


1.

2.

mm .



包装

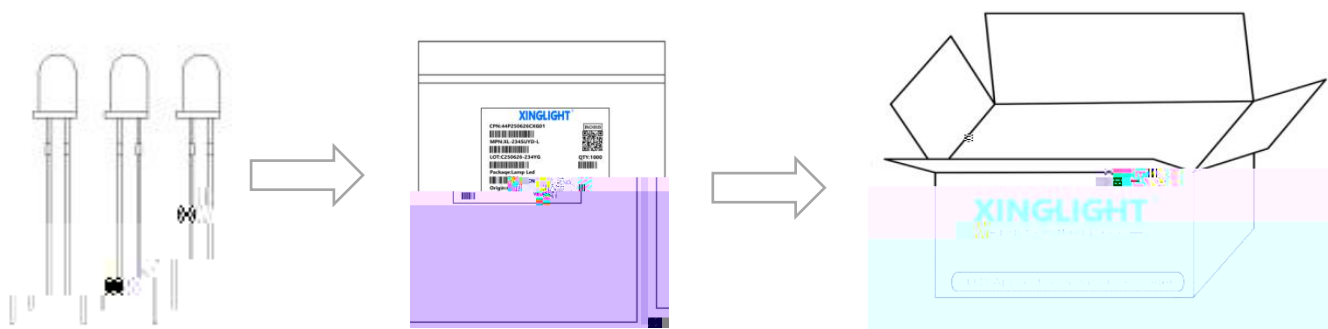

标签说明 Label Expantion

CPN: 批号/档位 LOT: 日期/封装颜色

MPN: 型号 VF: 电压代码

WL: 波长代码 IV: 亮度代码

ORIGIN: 产地 QTY: 数量

PACKAQE: 封装





使用注意事項 ()

LED


LED 30 70% LED

3

LED

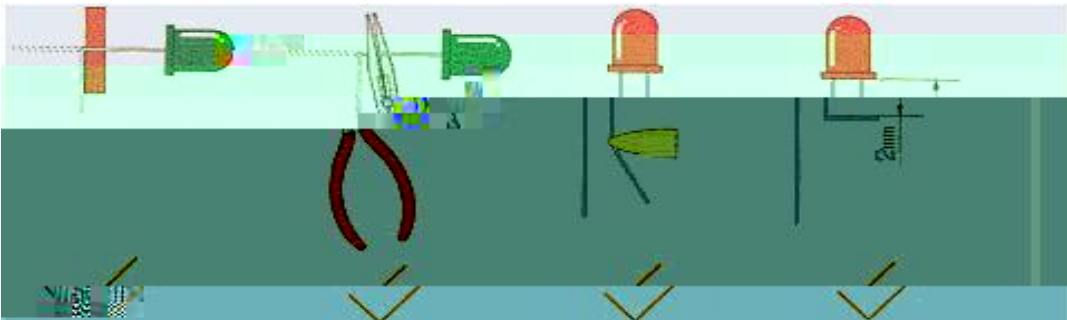

使用注意事項 ()



使用注意事項 ()

8、其他事項：

*

*