Part No. XL-DB3461SRBC

光电参数

外形尺寸及电路原理图

使用注意事项

电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Power	Pd	36	mw
Max Continuous Forward Current	IF		

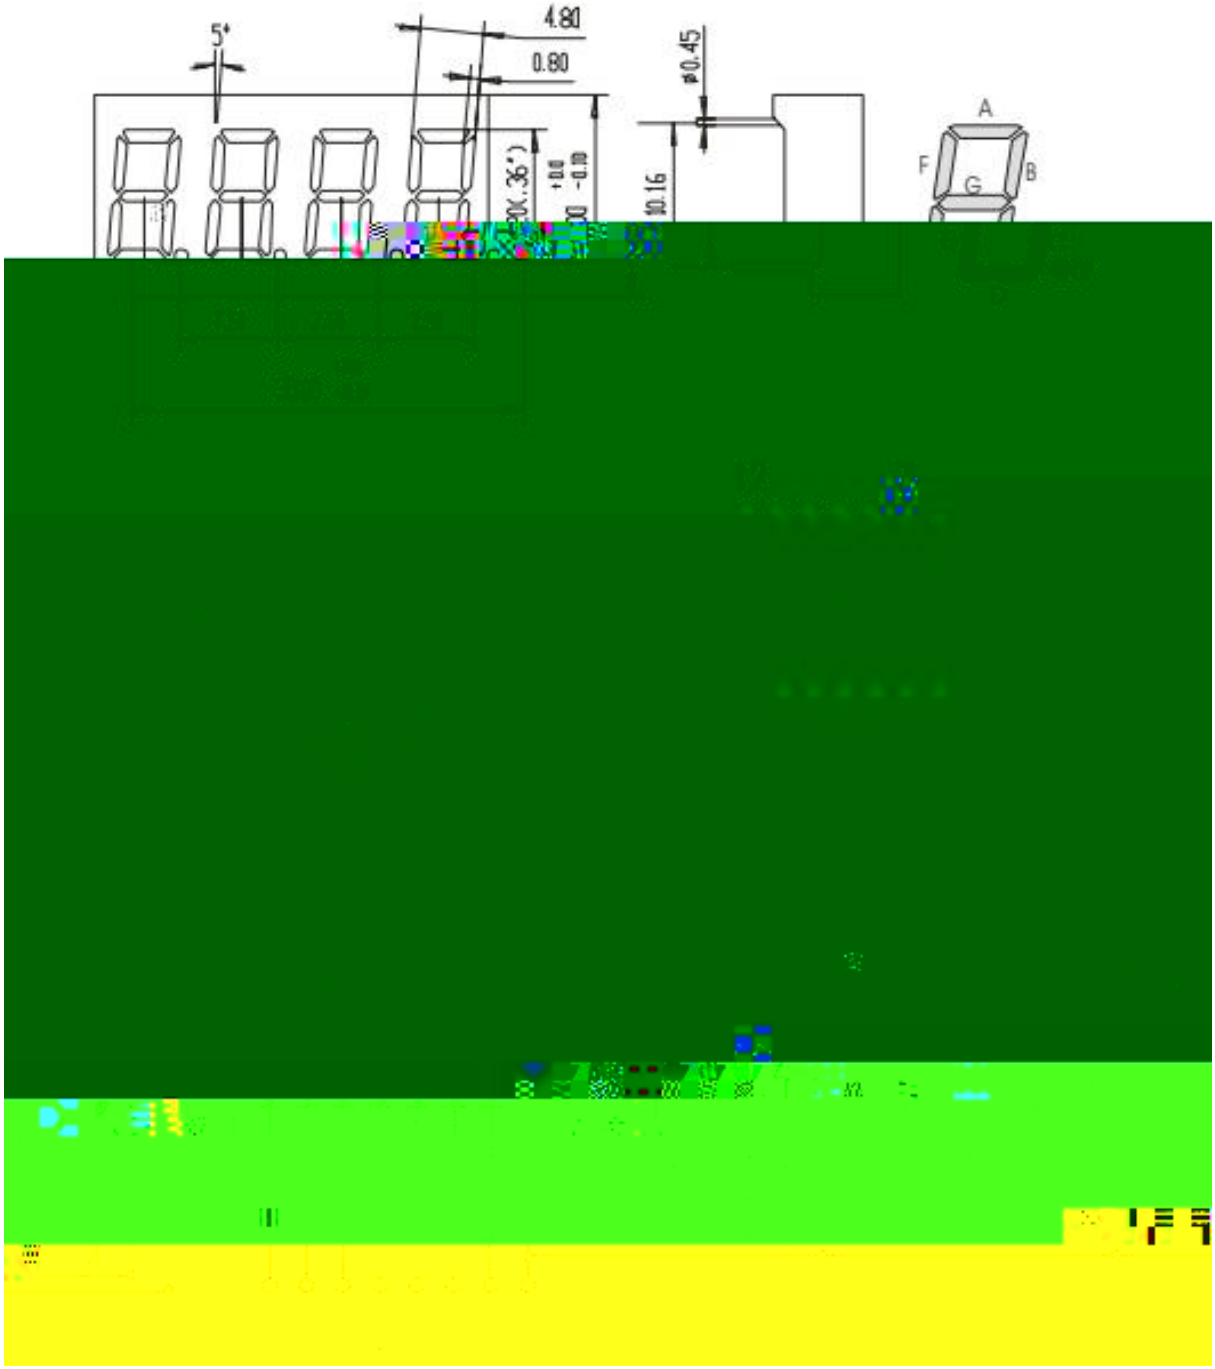

,

Pin sequence: viewed from the front of the digital tube, as shown in the figure

mm ±0.25mm

All dimensions in the figure are in millimeters; The size error range without marked error range is ± 0.25mm.

Dig ube uld be moi -proof f ctr nic product

Digital tubes are electrostatic sensitive devices, and anti-static