XL-DZ304UYD/3 技术数据表

F3MM 超黄发黄三孔灯

特点（ ）：

* : 15.5*4.5*12.0mm

Appearance dimension : 15.5*4.5*12.0mm

* : /

Luminous color and colloid: Yellow Light /Yellow colloid

* ROHS

Environmental protection products meet ROHS requirements

* MSL :2

Moisture sensitivity level MSL : 2 levels

* EIA

EIA standard packaging

*

Long operating life

*

Reduced maintenance costs

*

High energy efficiency, fast startup

## 应用领域（product application）

*

Internet of Things

*

medical treatment

*

converter

*

Storage servers and communication

* etc

# 目录

## 电性参数

| Parameter | Symbol |
| --- | --- |

## 亮度分档

| 代码 | 最小值 | 最大值 | 单位 | 测试条件 |
|---|---|---|---|---|
| A4 | 300 | 400 | mcd | IF=20mA |
| A5 | 400 | 500 | | |
| A6 | 500 | 700 | | |
| A7 | 700 | 900 | | |

亮度误差±10% Brightness error ±10%

## 电压分档

| 代码 | 最小值 | 最大值 | 单位 | 测试条件 |
|---|---|---|---|---|
| N12-7 | 1.8 | 2.0 | V | IF=20mA |
| N12-8 | 2.0 | 2.2 | | |
| N12-9 | 2.2 | 2.4 | | |

电压误差±0.1V Voltage error 0.1V

## 波长分档

| 代码 | 最小值 | 最大值 | 单位 | 测试条件 |
|---|---|---|---|---|
| HY03 | 585 | 587.5 | nm | IF=20mA |
| HY04 | 587.5 | 590 | | |
| HY05 | 590 | 592.5 | | |
| HY06 | 592.5 | 595 | | |

波长误差±1nm Wavelength error ± 1nm

## 可靠性试验

Reliability Test Item's And Conditions

| Class | Test item | Testing environment | Testing time | |
|---|---|---|---|---|

# 外形尺寸

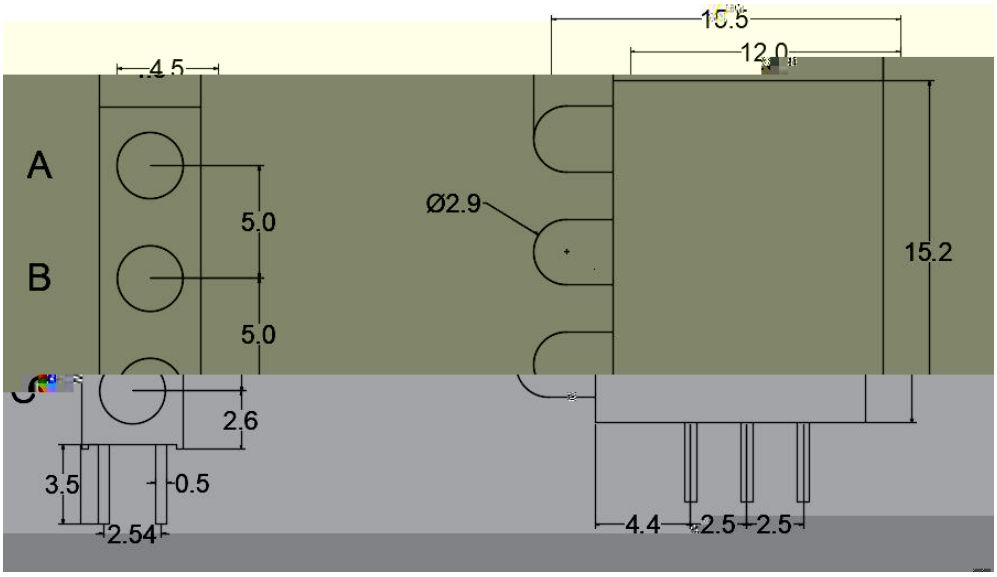


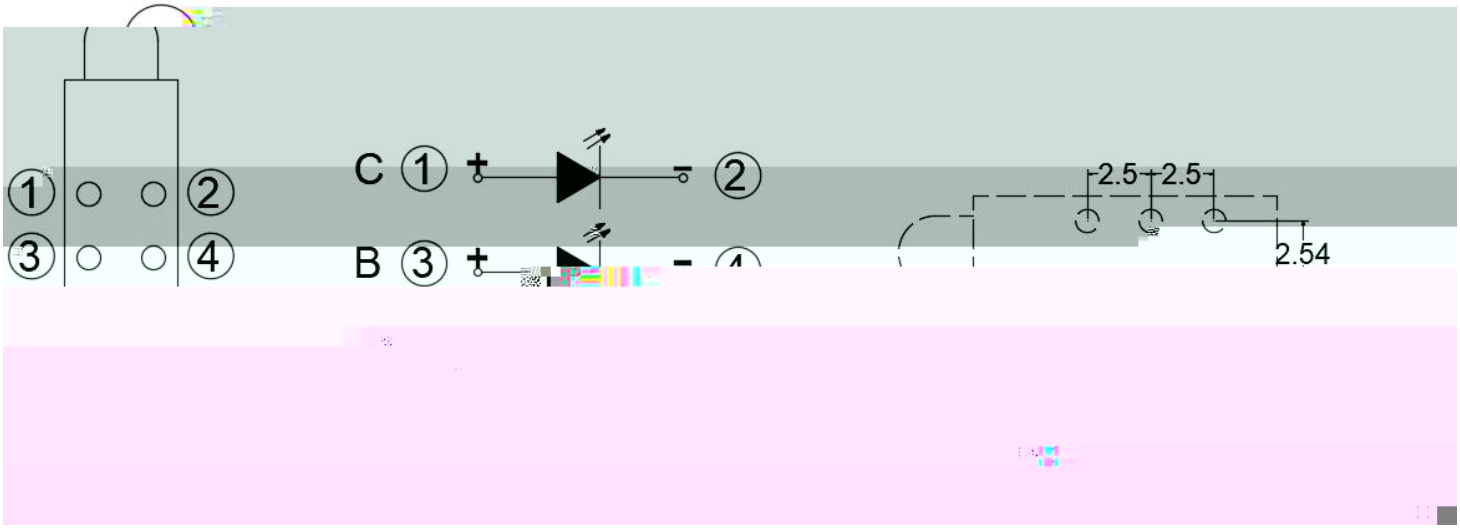


(Note)

1.

Dimensions are in millimeters.

2. Ñ 0.25mm .

Tolerances unless mentioned are Ñ 0.25mm.

# 包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

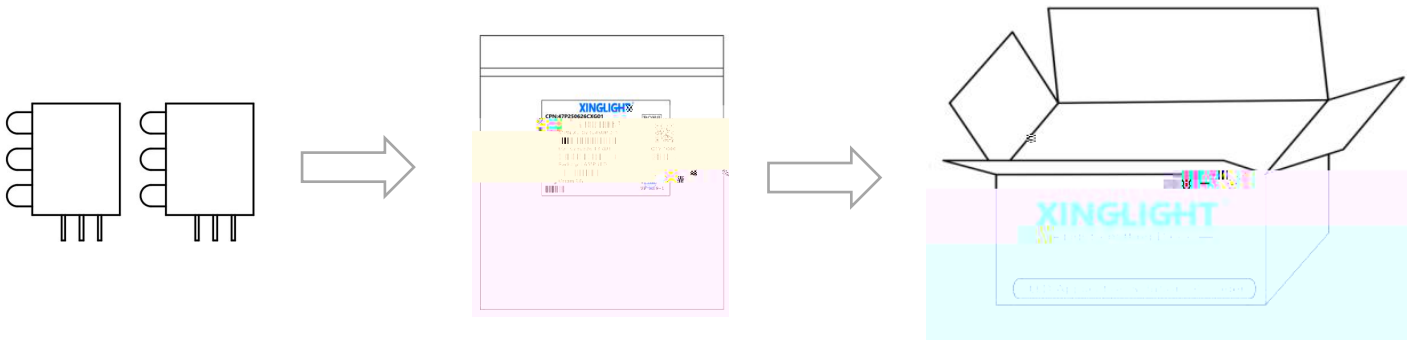

# Part

# 使用注意事項（3）

# Precautions (3)

**4、其他事項：**

*_ ʊ

*When handling the product, touching the encapsulant with bare hands will not one_t œn ynarh T

beb