


目录

Catalogue



电性参数





亮度分档

:

波长	最小值	最大值	单位	测试条件
----	-----	-----	----	------



电压分档

:

色温分档



典型特性曲线

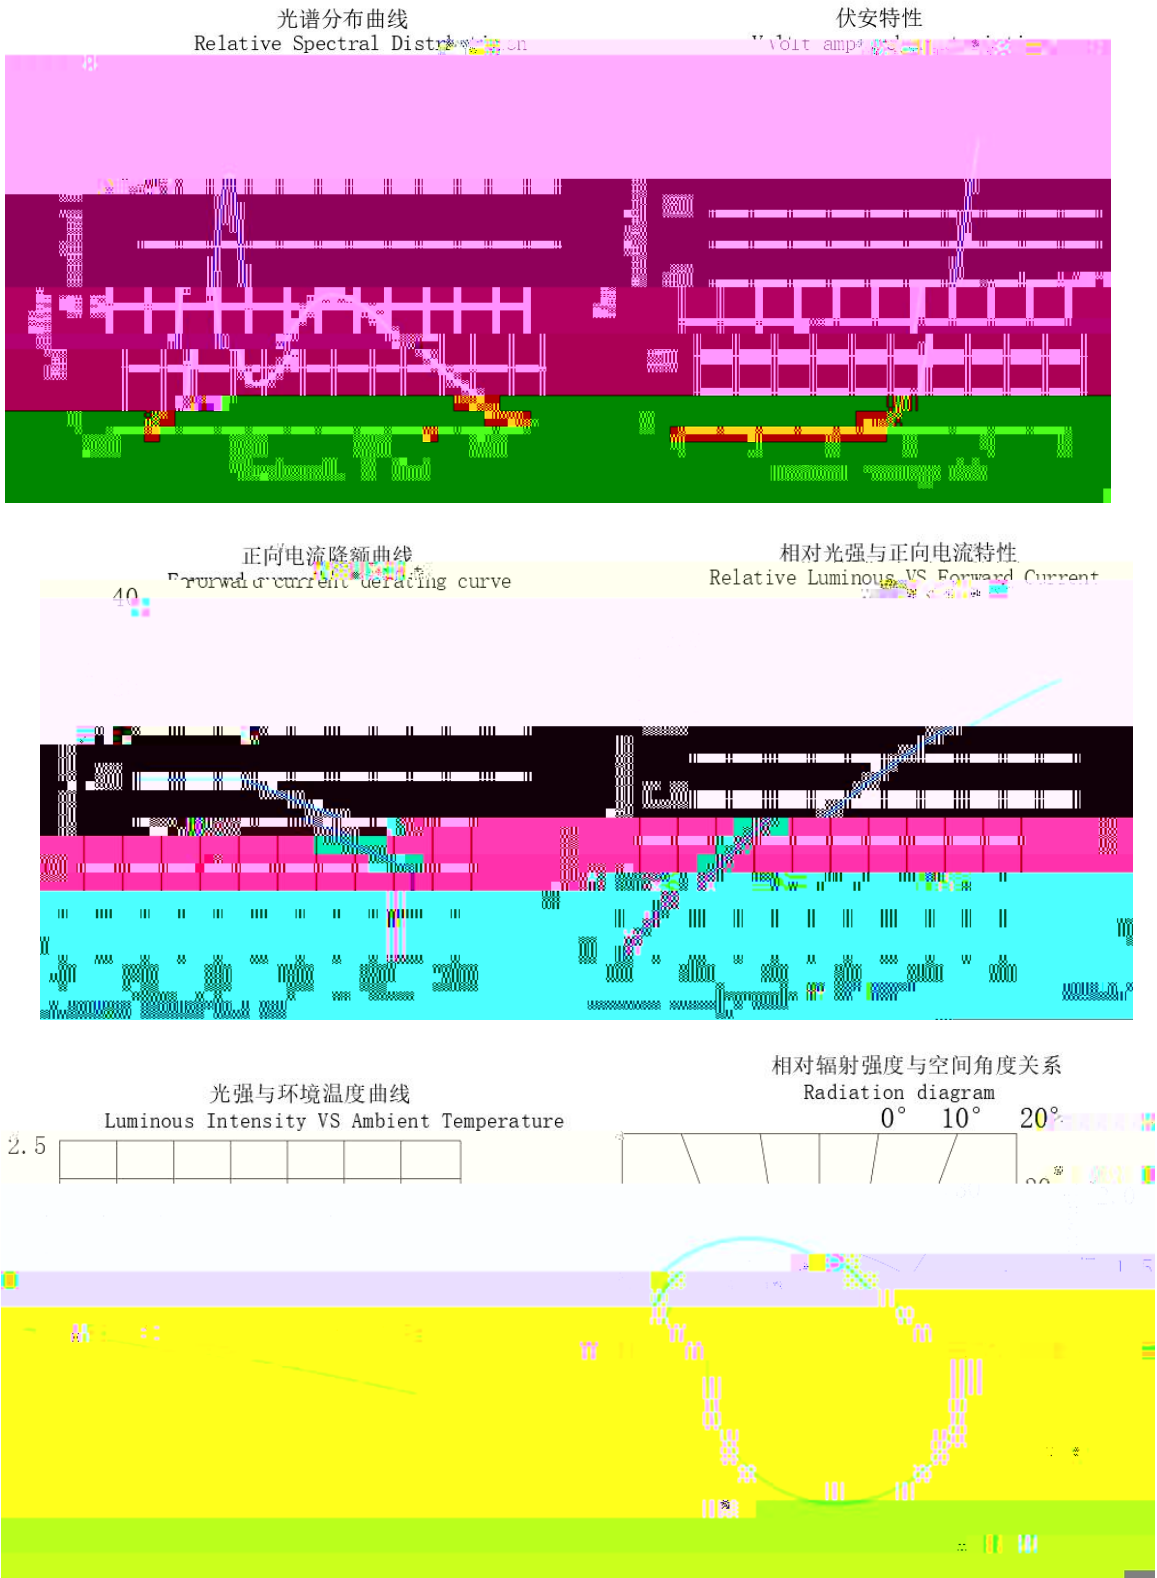

可靠性试验

Reliability Test Items And Conditions


Endurance test	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ± 5 -40 ± 5 30mins 5mins 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ± 5 -45 ± 5 5mins 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~ 0 °	3times	22 PCS	0/1



外形尺寸

1.

2. mm .




使用注意事項 ()

LED

LED

3



使用注意事項 ()

LED

LED

