

XL-DZ204UYD2



技术数据表

F3MM 封装尺寸图

特点 () :



应用领域 (product application)




目录

Catalogue

自性参数

Parameter	Symbol	Value	Unit

--	--






亮度分档

:

电压分档

典型特性曲线

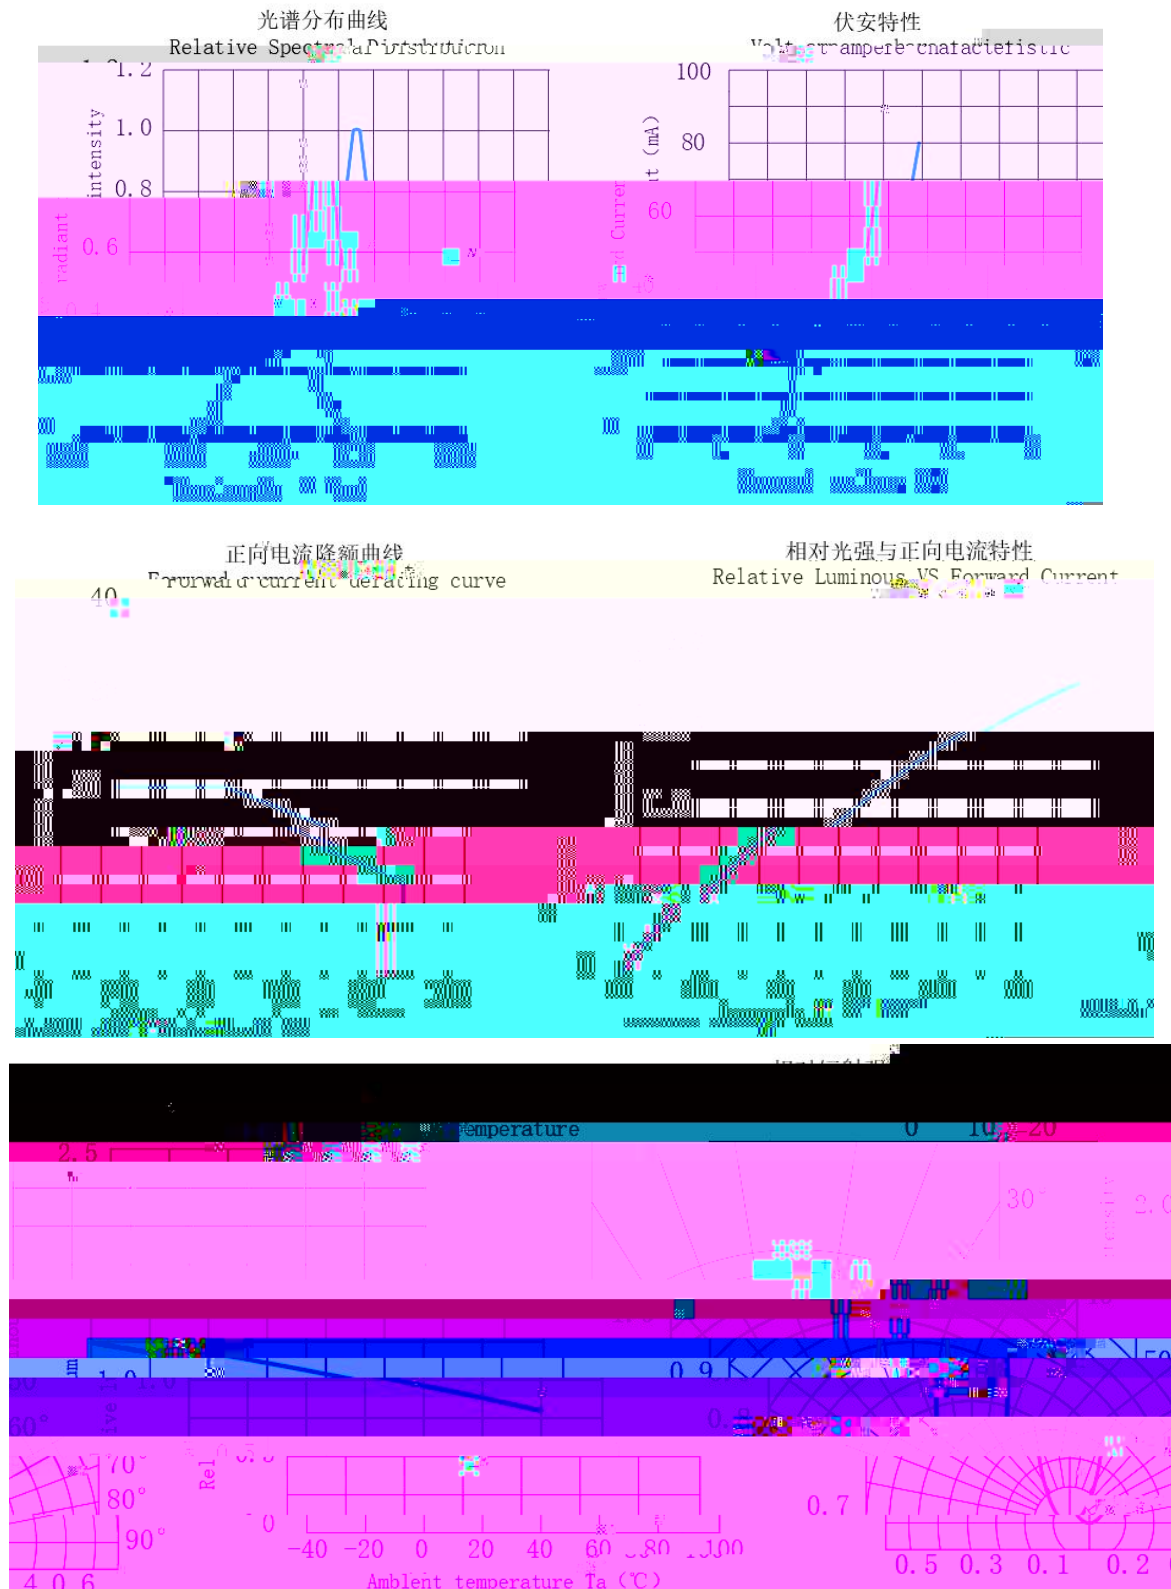


可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ± 5 , IF=20mA		1000hrs	22 PCS 0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%		1000hrs	22 PCS 0/1
	High-temperature storage	Ta= 85 ± 5		1000hrs	22 PCS 0/1
	Low temperature storage	Ta= -40 ± 5		1000hrs	22 PCS 0/1
	Cold and hot cycle	100 ± 5 30mins	5mins -40 ± 5 30mins	100 Circles	22 PCS 0/1
Environmental testing	Hot and cold impact			PECH	55 380

外形尺寸

包装

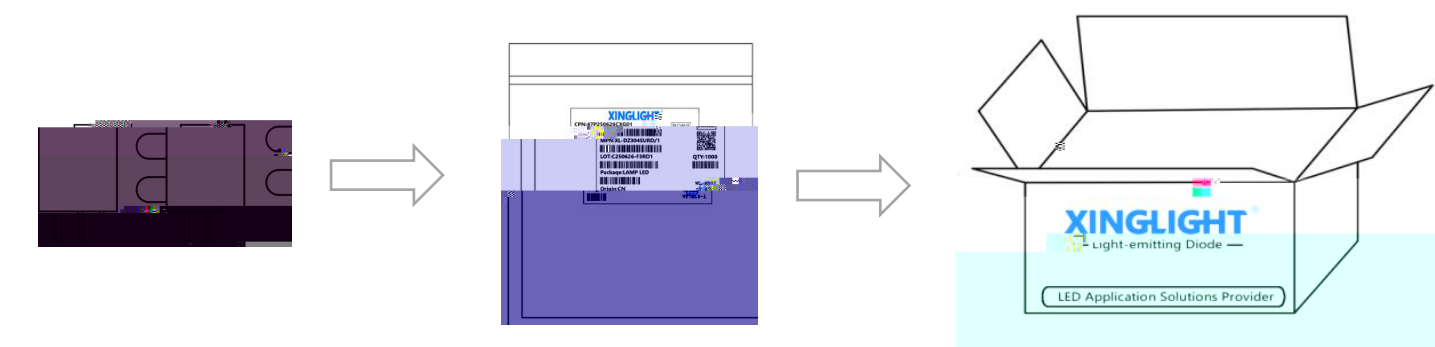

标签说明 Label Expantion

CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
QTY: 数量	WL: 波长
PACKAGE: 封装	

XINGLIGHT®

CPN:47P250626CXG01

MPN:XL-DZ304SURD/1

LOT:C250626-F3RD1

Package:LAMP LED

Origin:CN

ROHS

QTY:100

WL:HR02

