XL-DZ304SURD/1

F3MM 红发红单孔灯座



特点（ ）：

* :7.5*6.5*4.5mm

Appearance dimension : 7.5*6.5*4.5mm

* : /

Luminous color and colloid: Red Light /Red colloid

* ROHS

Environmental protection products meet ROHS requirements

* MSL :2

Moisture sensitivity level MSL : 2 levels

* EIA

EIA standard packaging

*

Long operating life

*

Reduced maintenance costs

*

High energy efficiency, fast startup

应用领域（product application）

*

Internet of Things

*

medical treatment

*

converter

*

Storage servers and communication

*

Status indicator

*

Electronic testing instruments





目录

Catalogue

亮度分档

：

电压分档

典型特性曲线

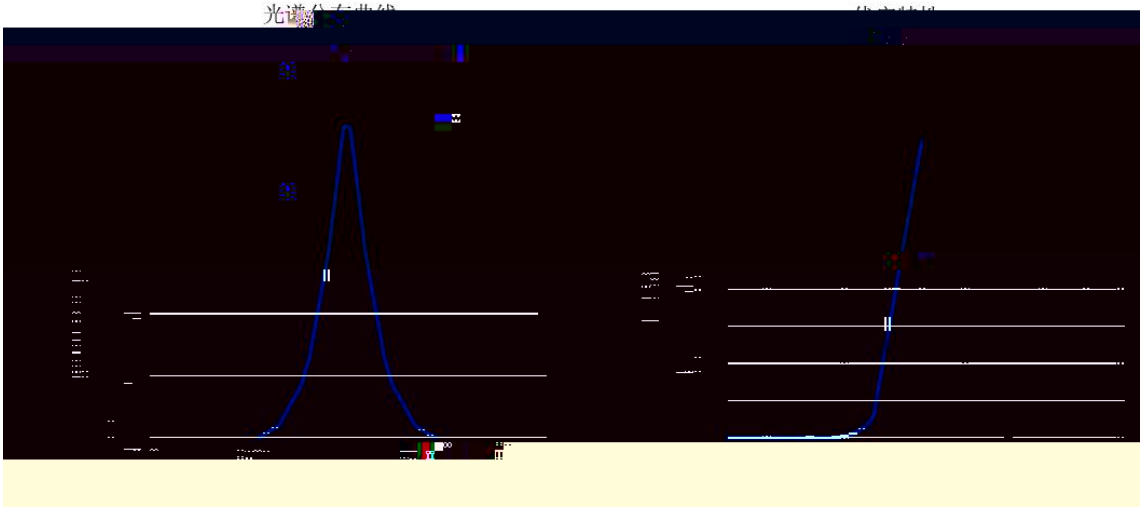

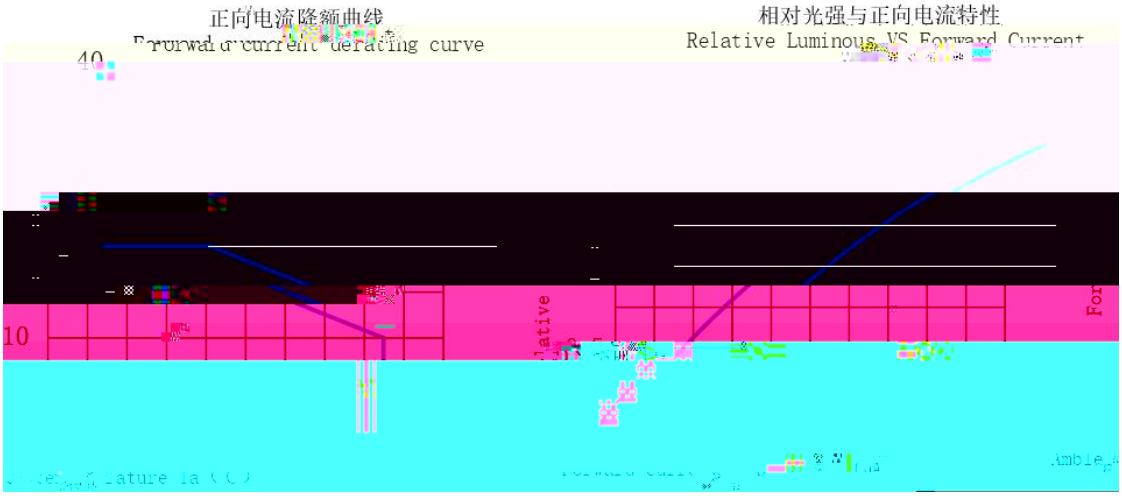

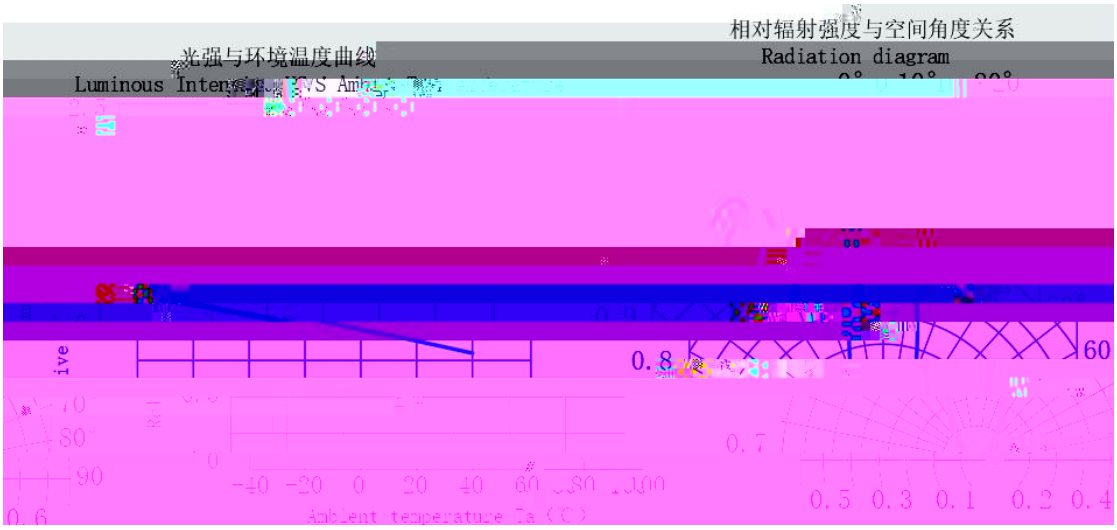

: 25 + 5 C./Note: If not otherwise indicated, the test environment temperature is 25 + 5 C.

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
Endurance test	Working life	Ta=25 ±5 ,IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85±5 , RH= 85 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85±5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= (!			

外形尺寸

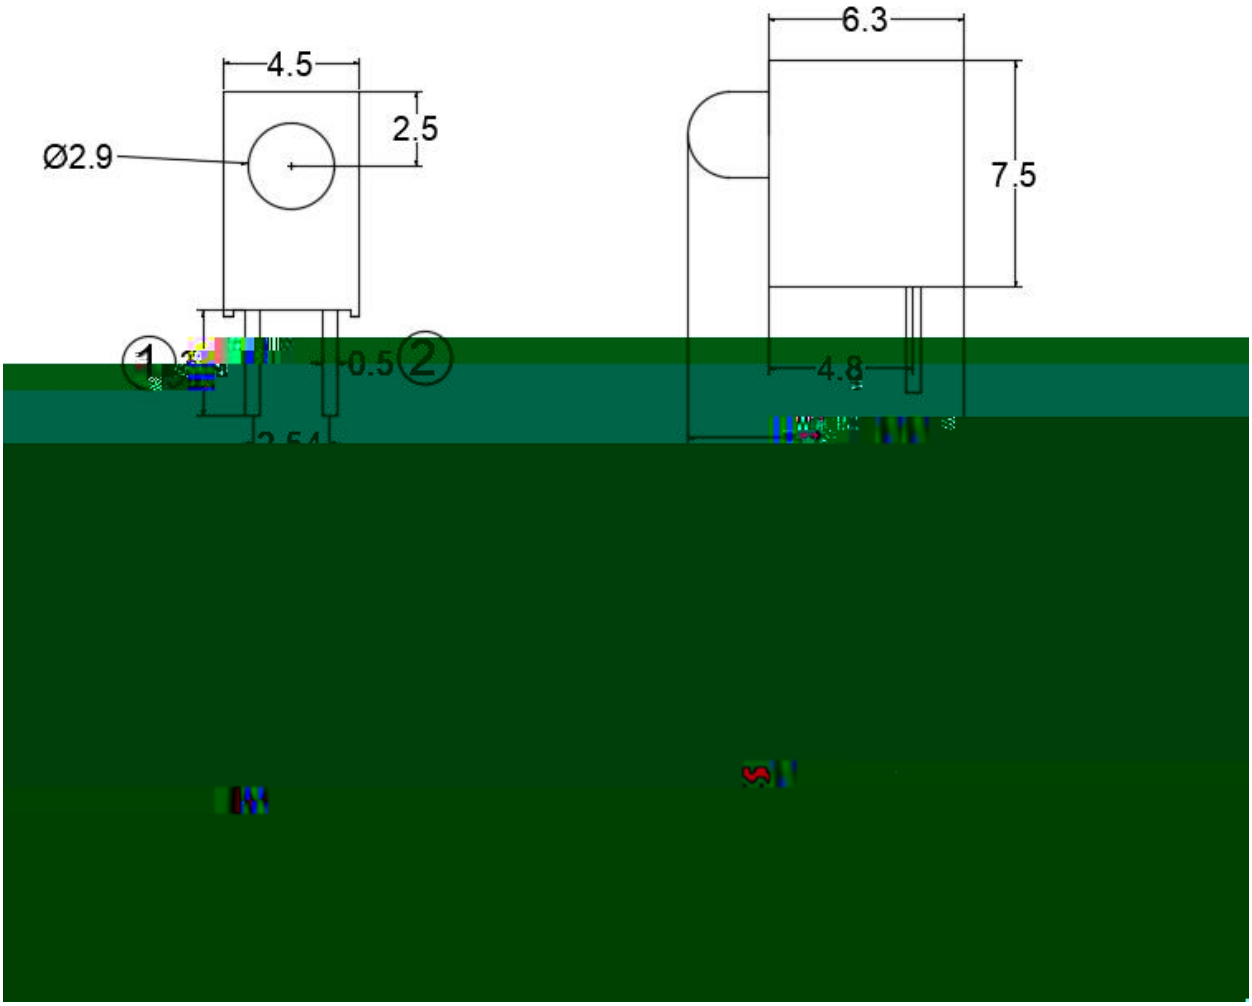

(Note)

1.

Dimensions are in millimeters.

2. Ñ0.25mm .

Tolerances unless mentioned are Ñ0.25mm.

包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

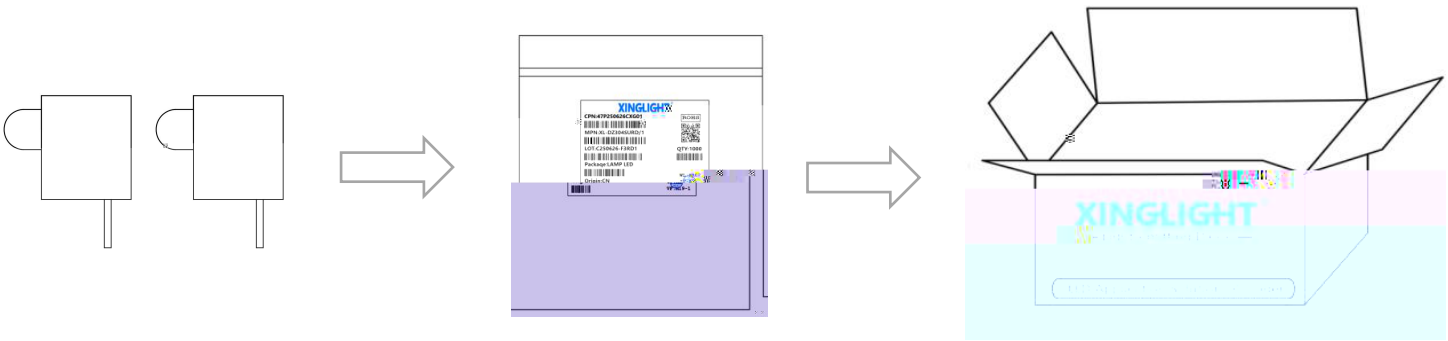

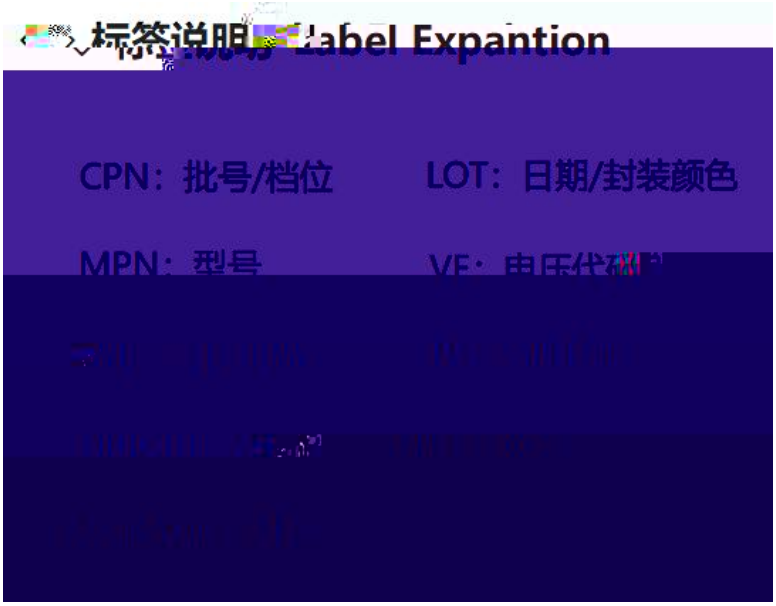

Part

使用注意事项(3)

4、其他事项：

*

*When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.

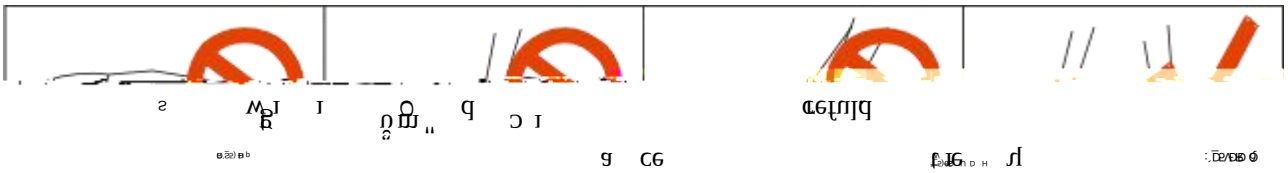

*LED

*The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.