

XL-A324SURUBW F3

技术数据表



特点（ ）：

- *
- *
- *
- * MSL :2
- *
- *
- *
- *
- *

应用场合（ ）：

目录

Catalogue

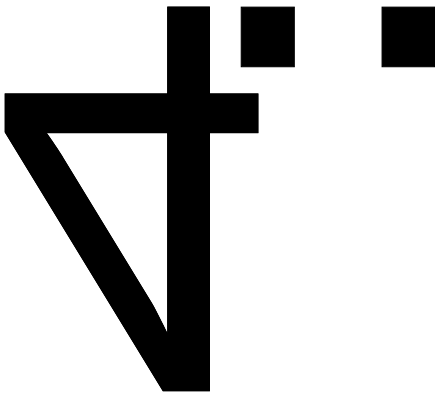

自性参数



Max Power Dissipation	PD	50	70	mW
Max Continuous Forward Current	IF	20	20	mA
Peak Forward Current	IFP	80	80	mA
Operating Temperature Range	TOPR			
Storage Temperature Range	TSTR			
/				
Lead Soldering Temperature/Time	TSOL			

亮度分档

:

代码	最小值	最大值	单位	测试条件

电压分档

:

代码	最小值	最大值	单位	测试条件

波长分档

:


Part No. :

可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ± 5 -40 ± 5 30mins 5mins 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ± 5 -45 ± 5 5mins 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~ 0 °	3times	22 PCS	0/1

外形尺寸

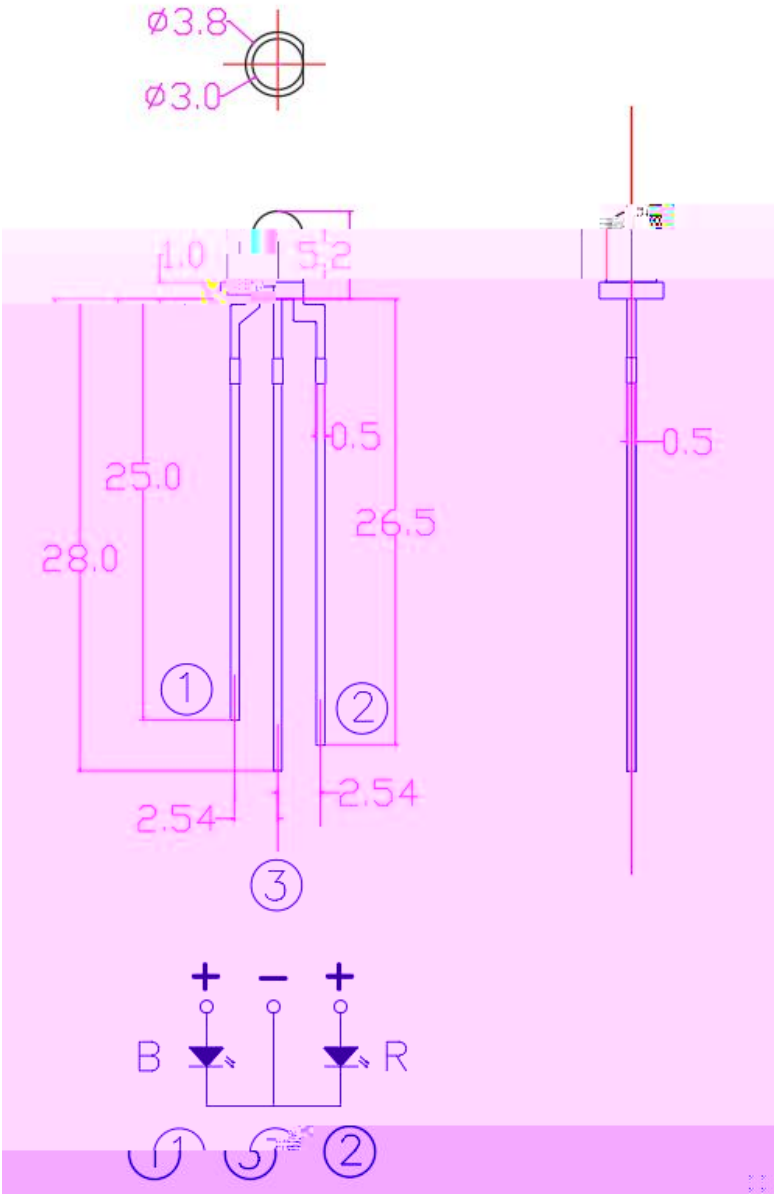

1.

2. mm .



使用注意事項 (1)



LED

使用注意事項 (2)

Precautions (2)

LED

LED

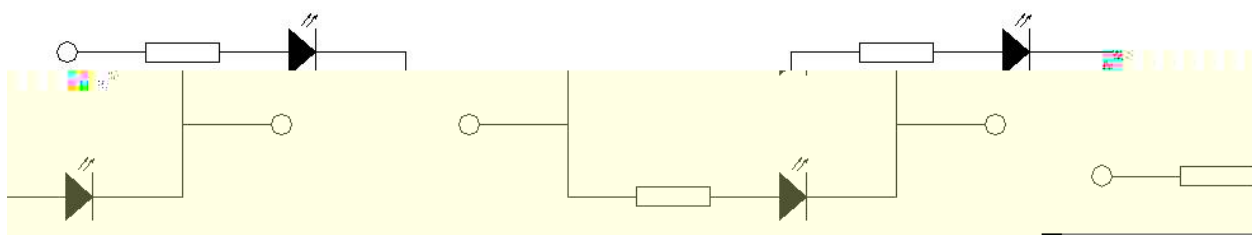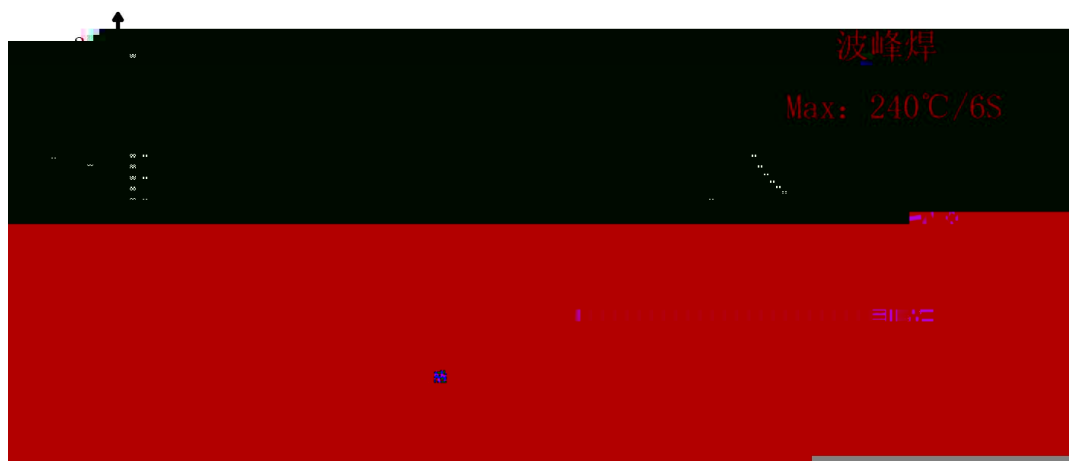

使用注意事項 (3)

Precautions (3)
