


技术数据表



目次

Catalog

电性参数


电性特性曲线

可靠性实验

外形尺寸

包装

使用注意事项





自性参数

Supply Voltage	VDD	6.0	V
Operating ambient temperature	Topr	-20 C ~ +85 C	
Storage ambient temperature	Tstg	-40 C ~ +125 C	
Welding conditions	Tsol	Wave soldering	240℃ 6s
		manual welding	300℃ 3s






Working current





Receiving angle testing method

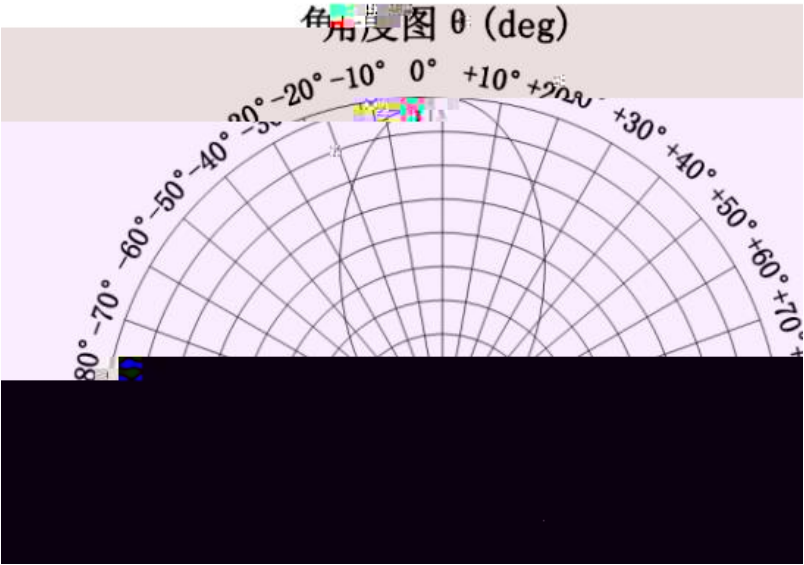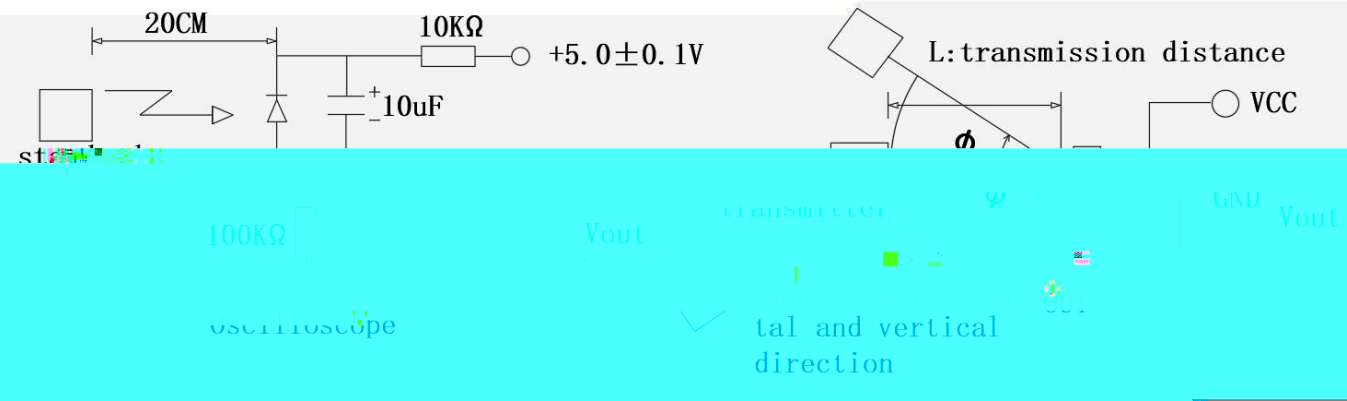


接收分档

代码	最小值	最大值	单位
----	-----	-----	----

代码

最小值

最大值



典型特性曲线

Test waveform

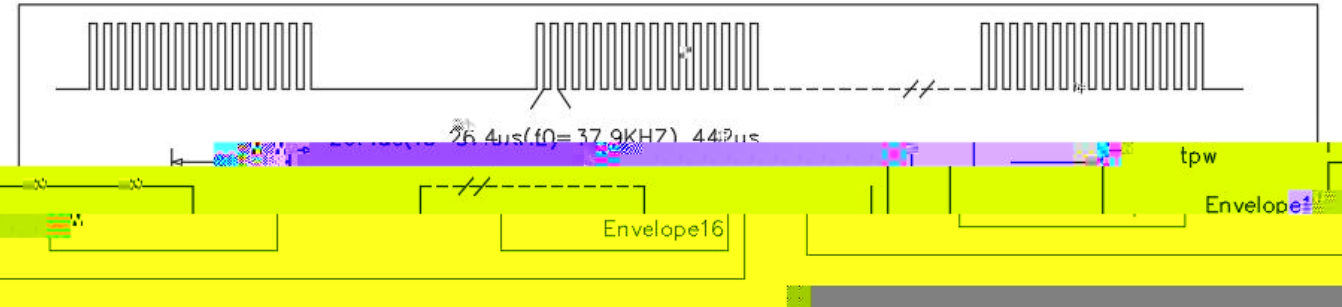


Figure 4. Typical Bandpass Curve


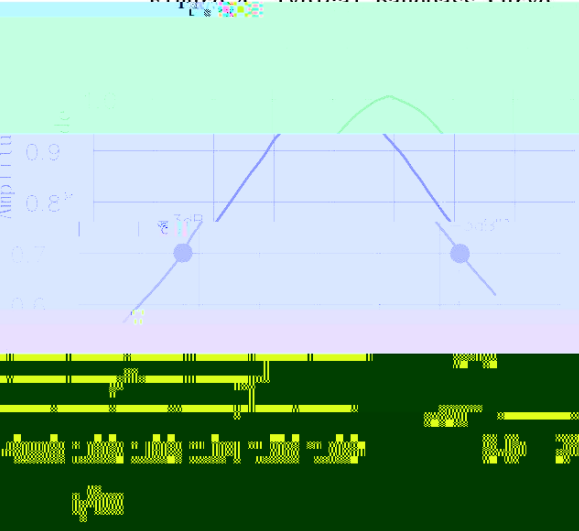


Figure 4. Supply Current vs supply voltage

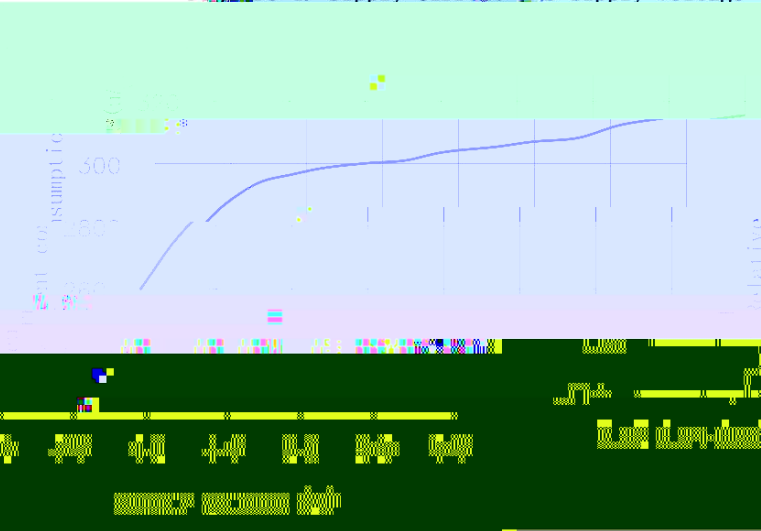


可靠性试验


Reliability Test Items And Conditions

*

	260 ± 5	5	20	20
	100PF 1.5KΩ , 4KV ,		20	20
	10-50HZ/1min 1.5mm X Y Z/30min	30	20	20
	85 ± 2	240	20	20
	-20 ± 2	240	20	20
	85 85%	240	20	20
	2.5N 2		20	20



外形尺寸

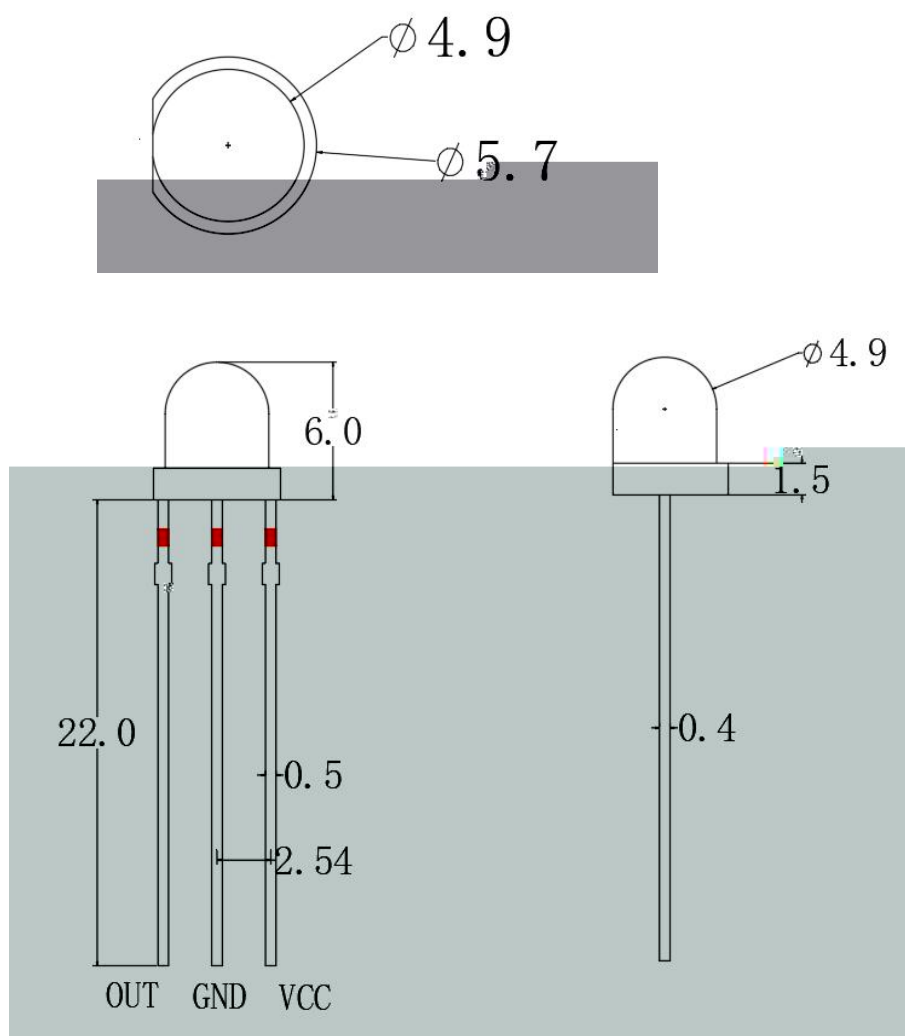

(Note)

1. Dimensions are in millimeters.
 2. $\pm 0.25\text{mm}$.
- Tolerances unless mentioned are $\pm 0.25\text{mm}$.





使用注意事項 ()

1

40 N0n ù!)^p


LED

15A eSY + u +u 5V 0 6 FJ 90

This Infrared receiver head can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

2

Storage environment of infrared receiver head with temperature not exceeding 30 and relative humidity not exceeding 70%.It is recommended that Infrared receiver head be used in the original box for no more than three months. If longer storage time is required

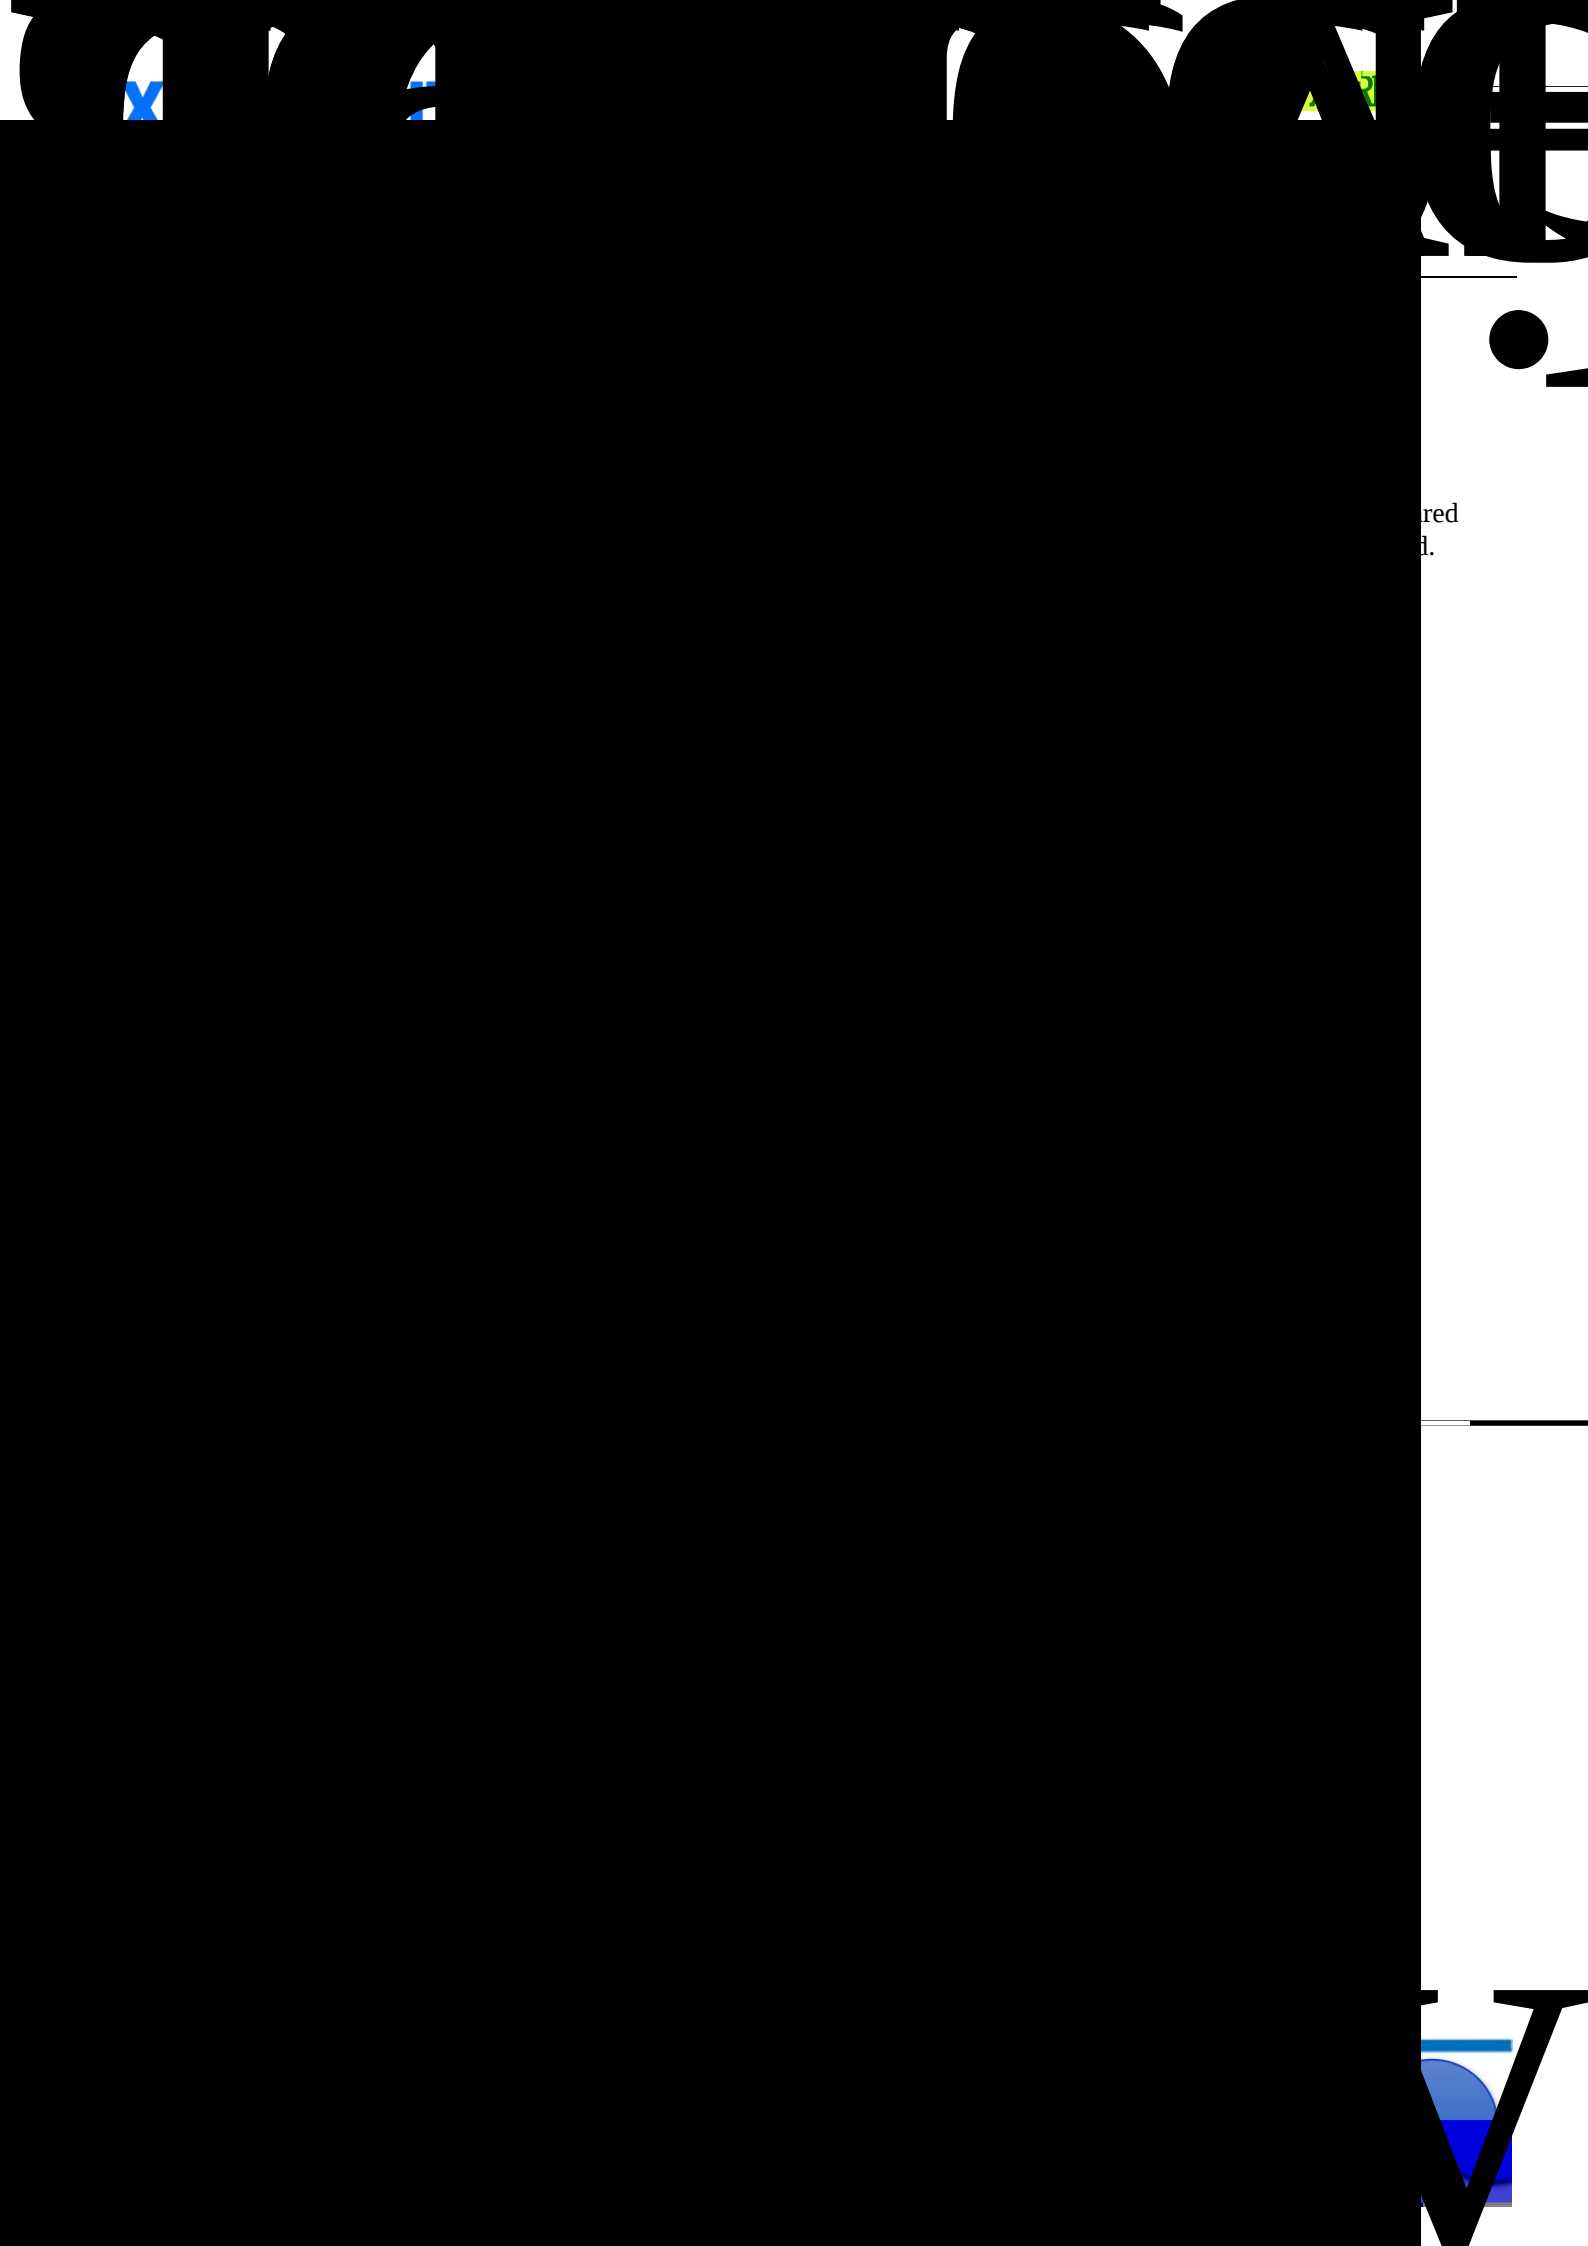


red
d.



使用注意事項 ()

9、其他事項：

Do not apply unnecessary external force to the pins of the infrared receiver head Pay attention to protecting the receiving surface of the infrared receiver head Staining can affect reception function



If there are any modifications to the specification sheet, no further notice will be given

