ج ṗ ᴄ PINѽ غ ʏ ᴡ ╠
IC, ٧ تم قمم ĭ ṗ ĭ
ج REACH غ ROHS Ḡ ج ضي
ƀ ڪ ą

This product contains a high-speed and high sensitivity pin photo diode and Low power consumption, high gain Preamplifier Ic Adopting epoxy resin plastic encapsulated semi circular spherical packaging Dual shielding and anti-interfere

目录

# catalogue

:

ǎ )

| | | | |
|---|---|---|---|
| ˥ ˩ | | | |
| ǂ | | | |
| ƀ | | | |
| Ũ | | | |
| | | | |

ǫ̀ ǎ )

| ǎ | ˆ | ˬ | ˬ | ˬ | ˩ β | Ɠ |
|---|---|---|---|---|---|---|

ƀ

ˬ

ˬ ǂ

ǂ

ǂ ‖

| | | | | | |
|---|---|---|---|---|---|
| | VDD | 2.7 | - | 5.5 | V |

| | |
|---|---|
| Minimum Burst Length tburst<br>(number of pulses per burst)<br>ǖ tburst ǖ ‖ | 10 pulses |
| Minimum Burst Gap time tburst_gap<br>(number of pulses per burst) between two burst<br>ǖ ǖ tburst_Gap<br>ǖ ‖ | 12 pulses |
| Minimum data pause time<br>( for full frame repeat code )<br>Å<br>ŋ ך | 25 msec |

| | | | |
|---|---|---|---|
| Toshiba | o | Sony 20 bit | o |
| NEC | o | Matsushita | - |
| RC5/6 Philips | o | Mitsubishi | - |
| RCA Thompson | - | Zenith | - |
| Sharp | - | JVC | - |
| Sony 12bit | - | Continuous code | - |
| Sony 20bit | - | - | - |

1. ج ŋ
2. ǖ Ḥ ك ض 20Cm ץ ą ǖ Ḥ ك ↕

Ð

## Test conditions

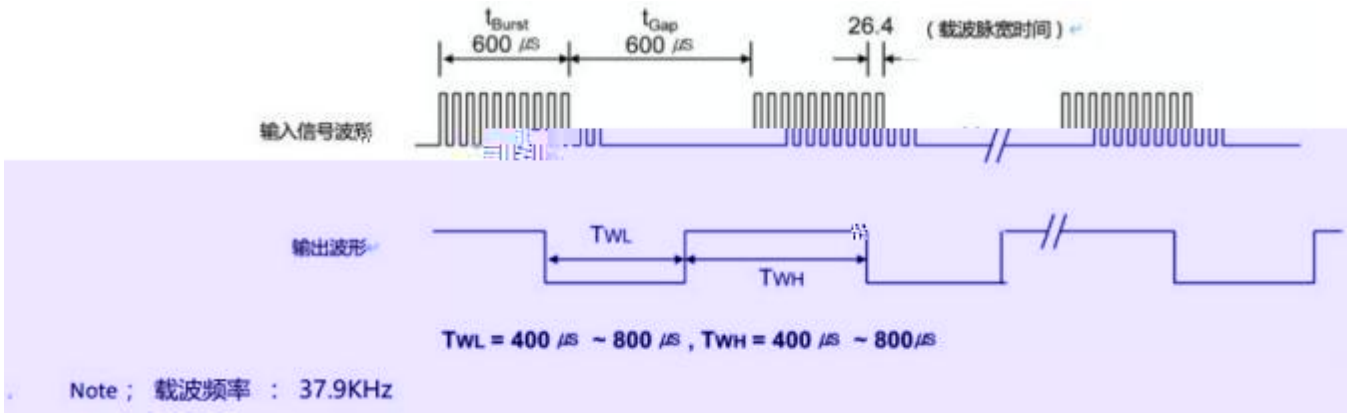

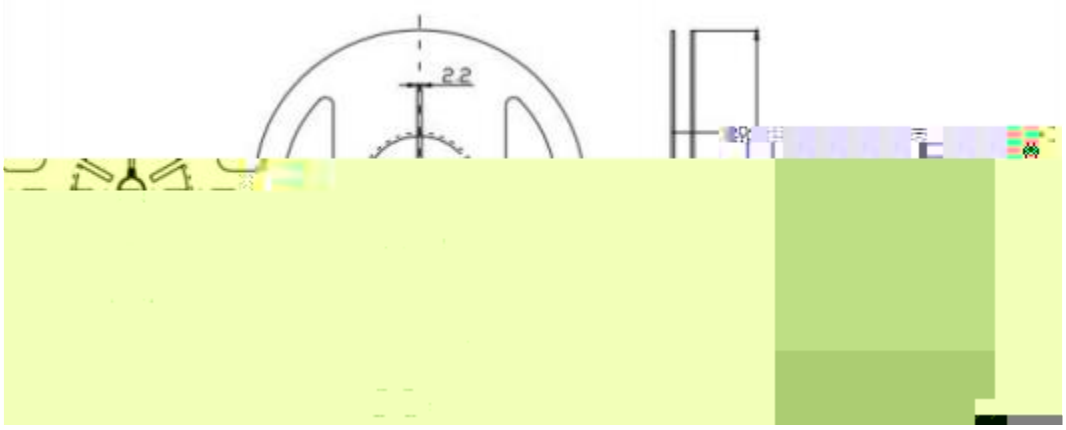
22

( )

◇ 防潮抗静电包装Moisture Proof and Antti-Electr Plastic Foil Bag

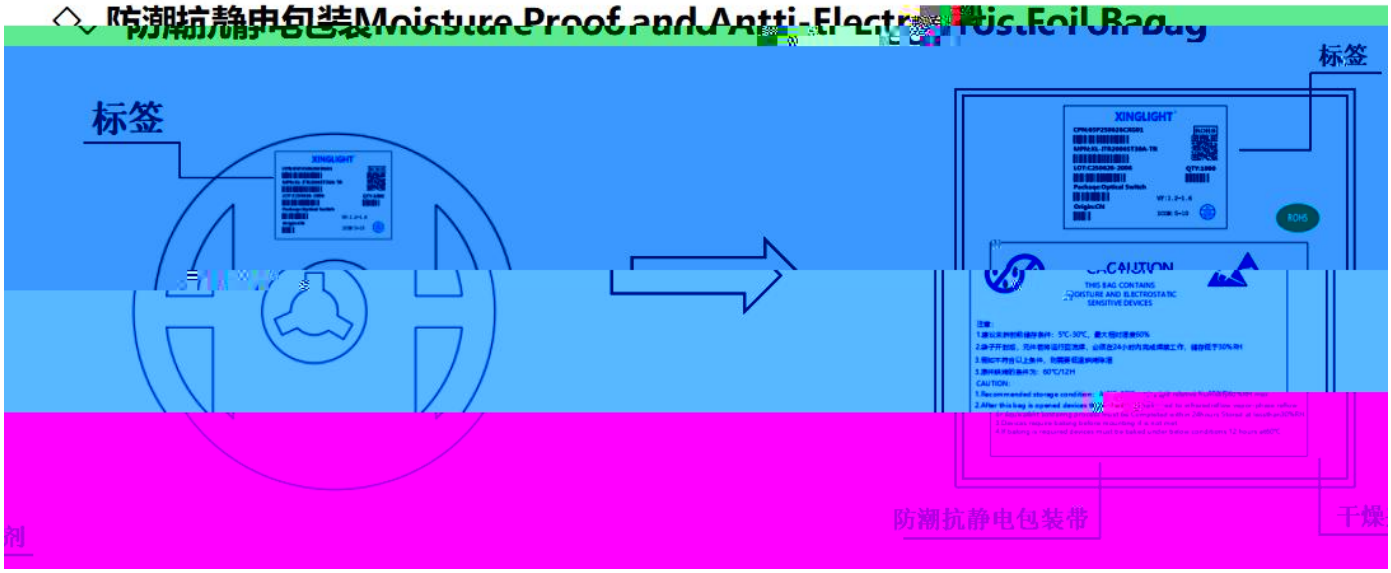


◇ 外包装箱 Cardboard Box

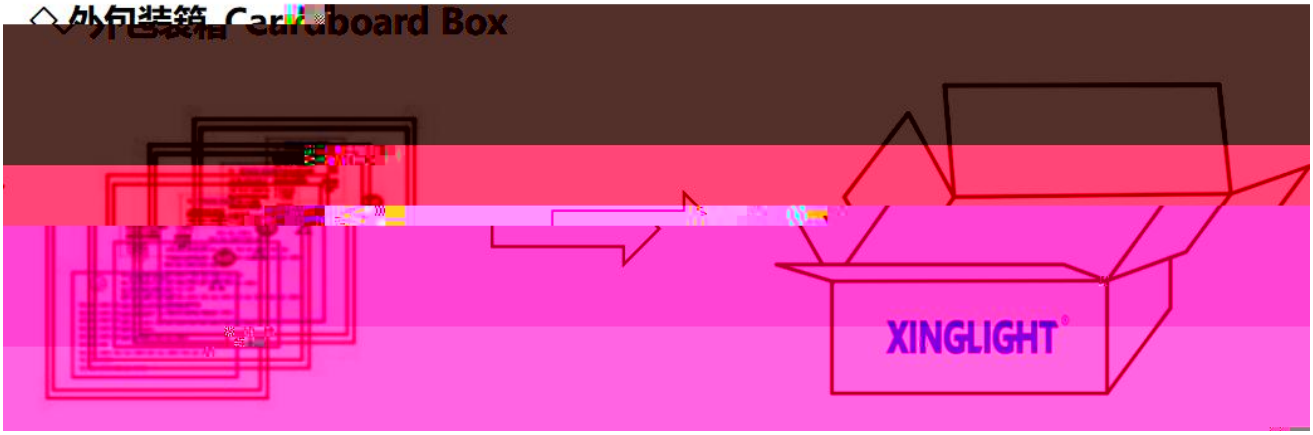


◇ 标签说明 Label Expantion

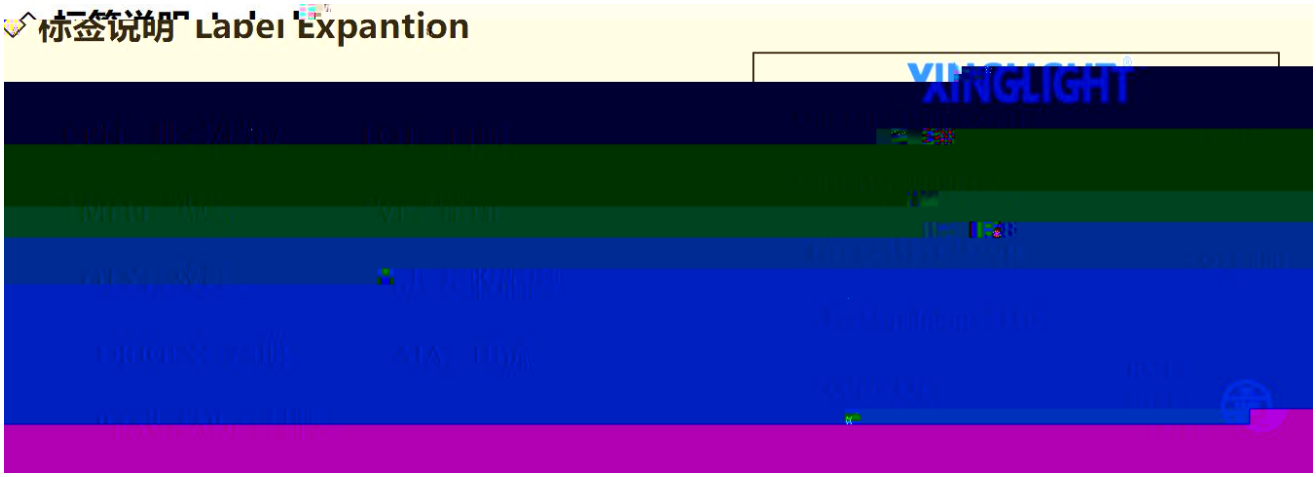

:

)

ضِ Ḡ ą w- ą ’ غ ḱ ضِ 7 30 ٧

ƀ 7 ٧

ڜ ج

:

.....

)

)

. ج ą ´ ┐ ج Ḡ

. ╠ ج ضي ,

( )