## 电性参数

Ta=25 ( , אq Ѭ γ Š`

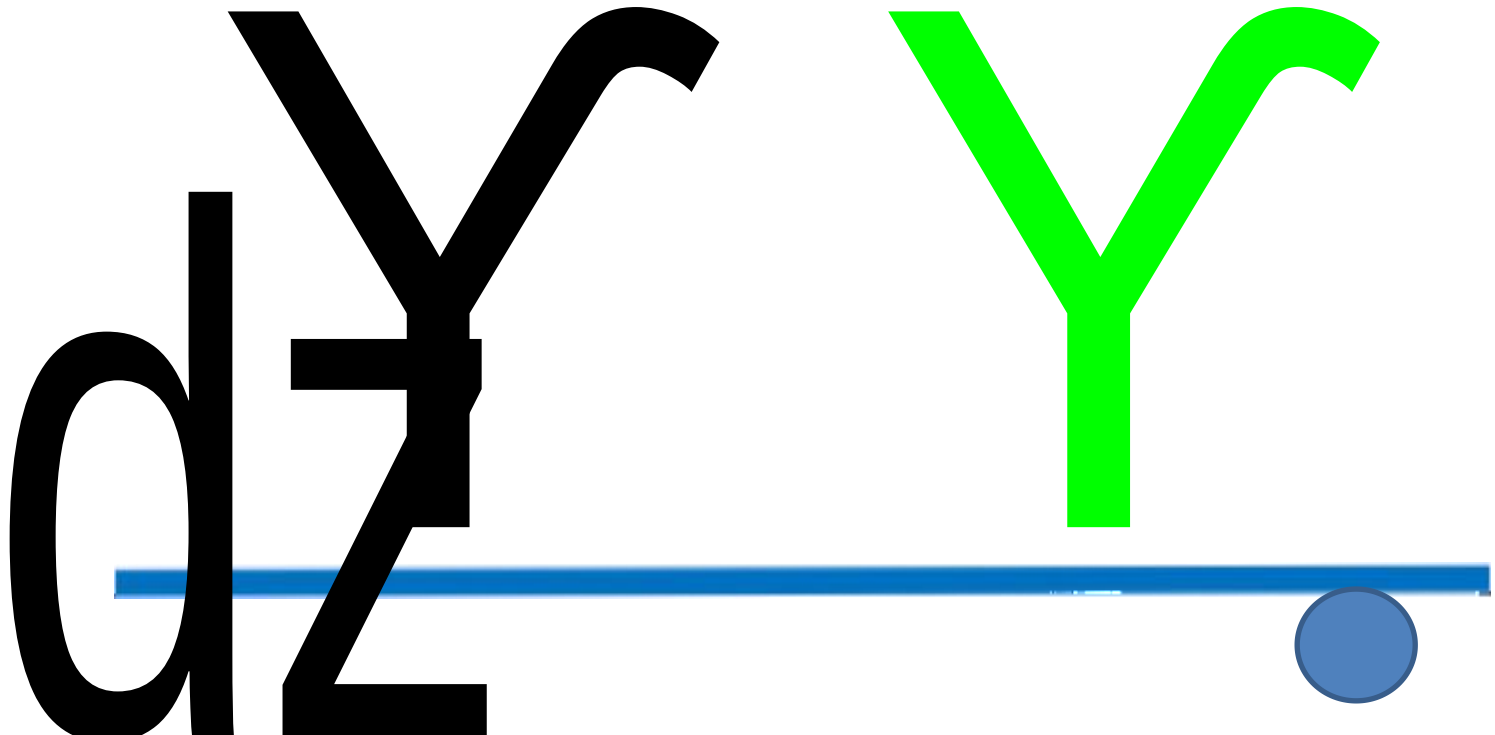

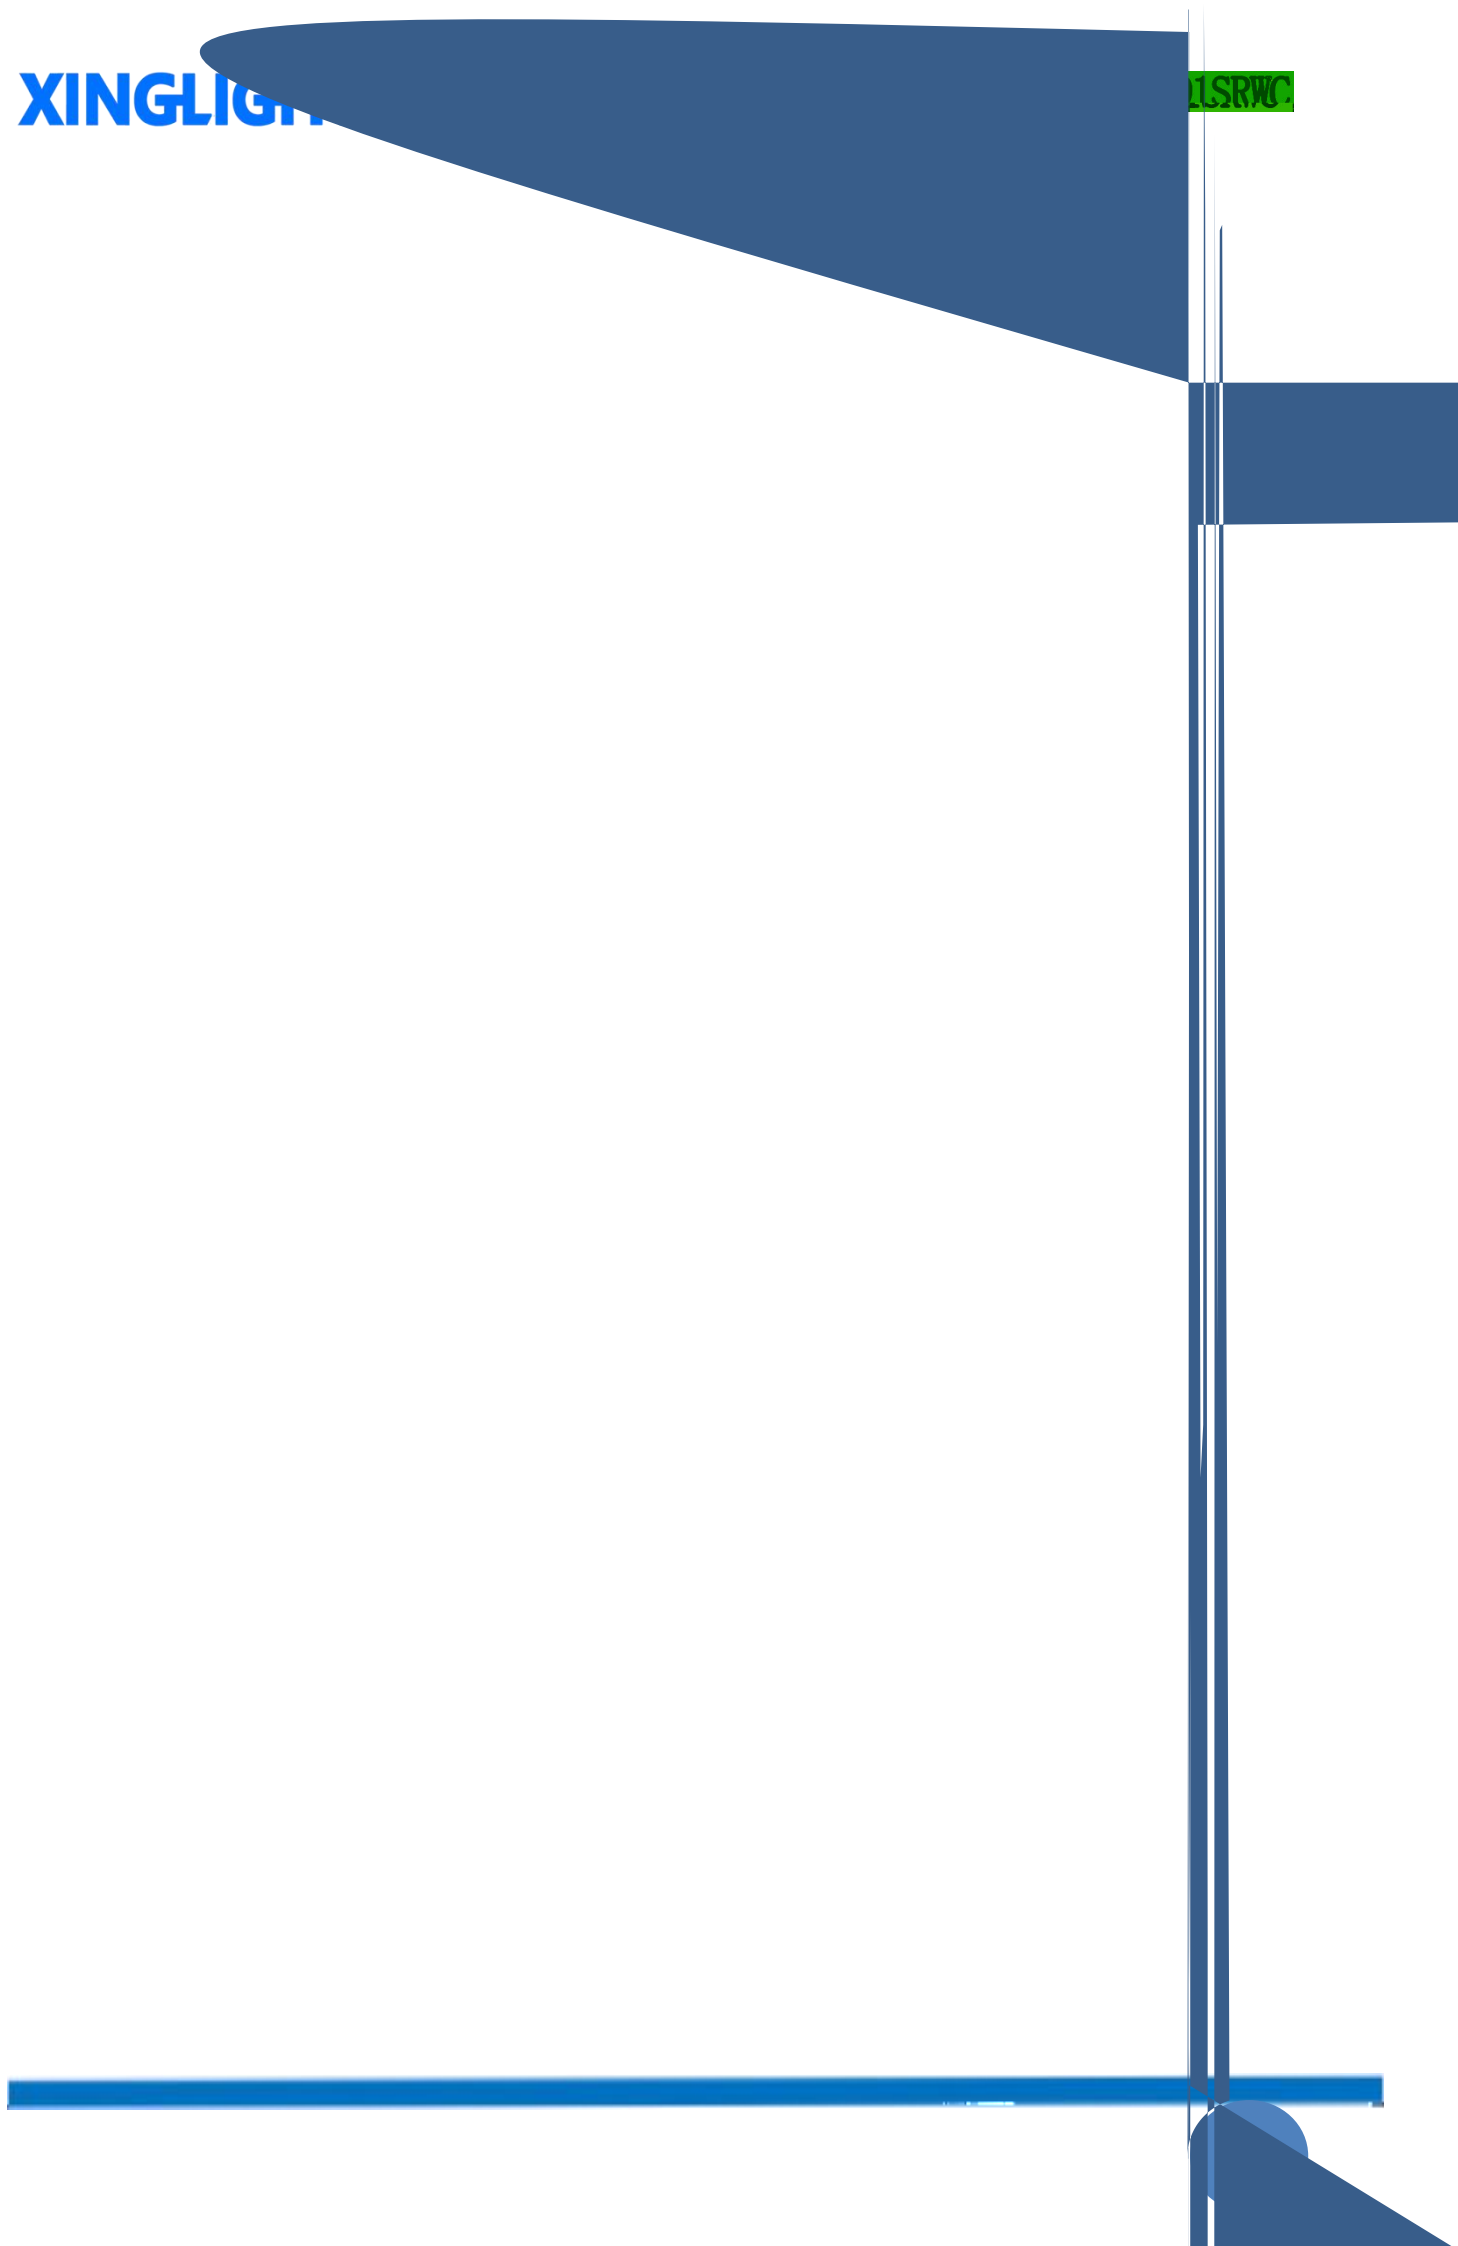

<300 :3s

we g temperatu <300 ; Welding me: 3

2 100 120 235-245

<6s

Pr ating temperature for tin immersion and (not ex eding 120 , with stable heating), soldering temperature: 235-245 (search for timal temperature), soldering time:<6s

3

Exceeding the above conditions leads to a sharp increase in digital tube failure

1

When in use, the current and voltage must be correct; Add current limiting resistors to segments and decimal points;

The product should not be stored or used in corrosive gases, and should not be exposed to air for too long, otherwise it may cause oxidation;

3

All devices and instruments that come into contact with digital devices must be grounded

4