Part [redacted]

Part [redacted]

包装（1）

Packaging (1)

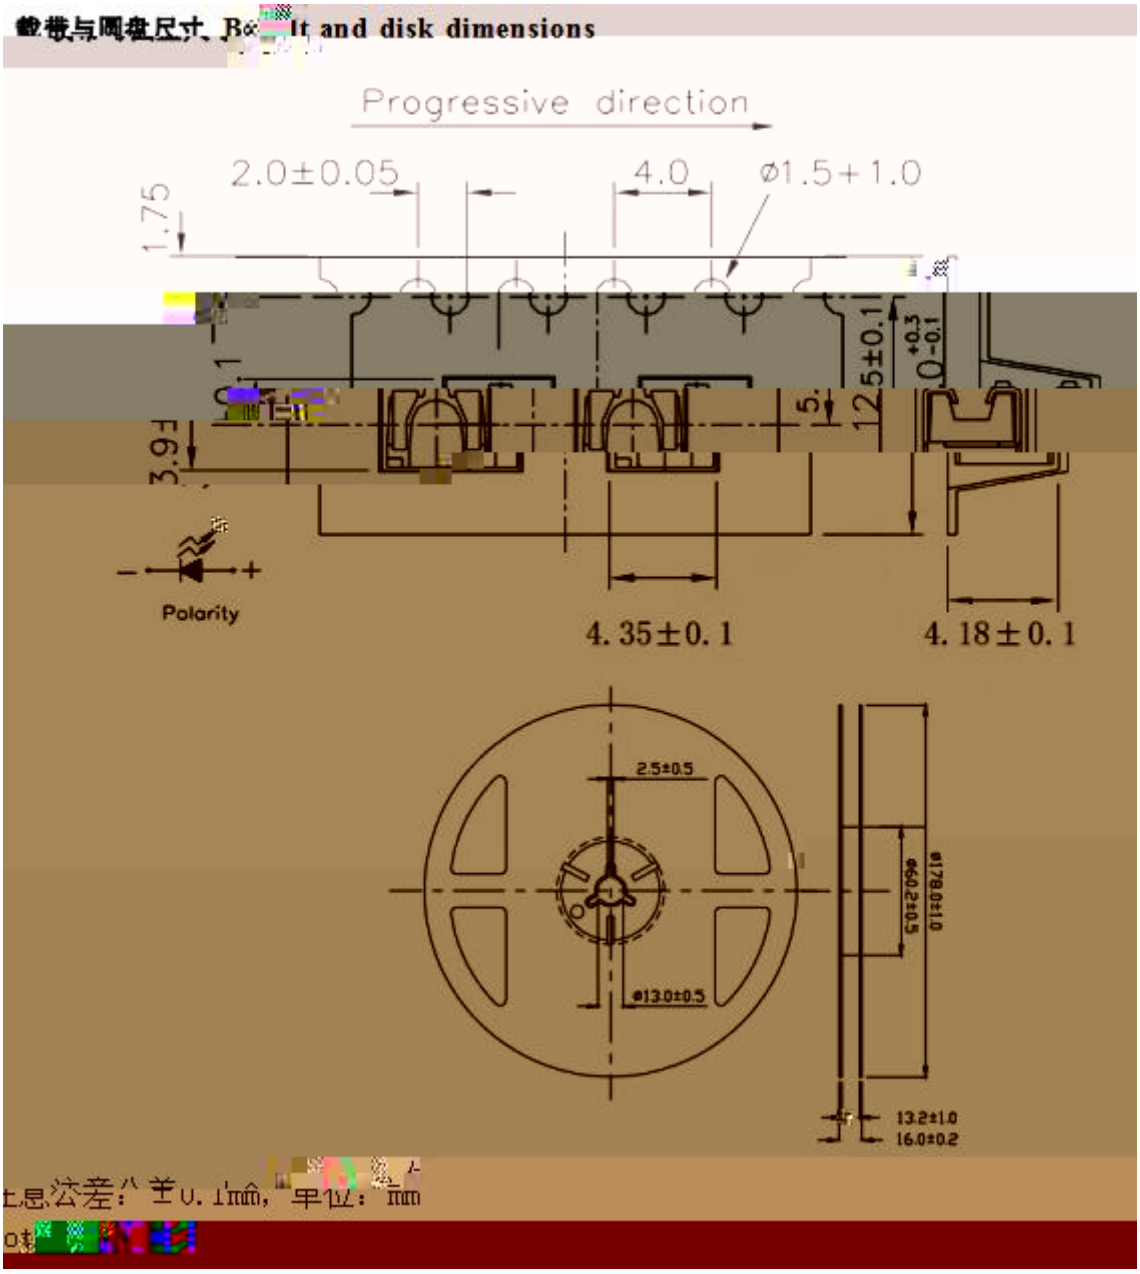

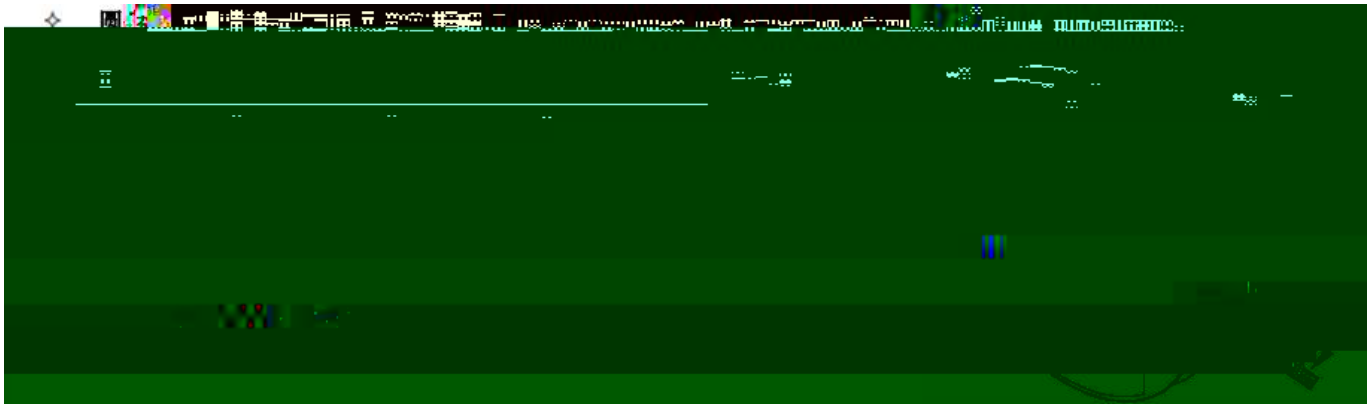

焊接指导（2）

Guideline for Soldering (2)

[redacted]

30 3 50

30

LED

300W LED

LED

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 for 3 utes or 50 or 30 s ds. When ng other sol ents, it ld be co d beforehand whether the s ents will c ve th ckage and th sin or not.

Ultrasonic leaning i lso effective w for eaning. But e influen of Ultra ic cleaning on fac such as ultra ic power. Generally, th trasc po sho not be higher than 300W. Befor eaning, retest shou e done to onfirm whether any damage to LEDs will occur.

[redacted]

* **注意：** PCB

PCB

* This general guideline may not apply to all PCB designs and configurations of all soldering equipment. The technics in practise is inf