

XL-DZ504SYGSIURD/2


技术数据表 Technical Data Sheet

ESMM 光通量-5.8W/1.4

特点 (characteristic) :

) :

Qv



目录
Catalogue

Electrical Characteristics.....3

Typical Characteristic Curves.....6

Outline Dimensions.....9

Packaging..... 10


Precautions.....11



电性参数


Electrical Characteristics

Absolu



Initial Electrical Optical Characteristics Ta=25

Parameter	Symbol		Min.	Typ.	Max.	Unit.	Test Conditions



亮度分档:
Brightness grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions

亮度误差±10% Brightness error ±10%

电压分档:
Voltage grading:


代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions


电压误差±0.1V Voltage error ± 0.1V

波长分档:
Wavelength grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions




波长误差±1nm Wavelength error ± 1nm






典型特性曲线


Typical Characteristics Curves

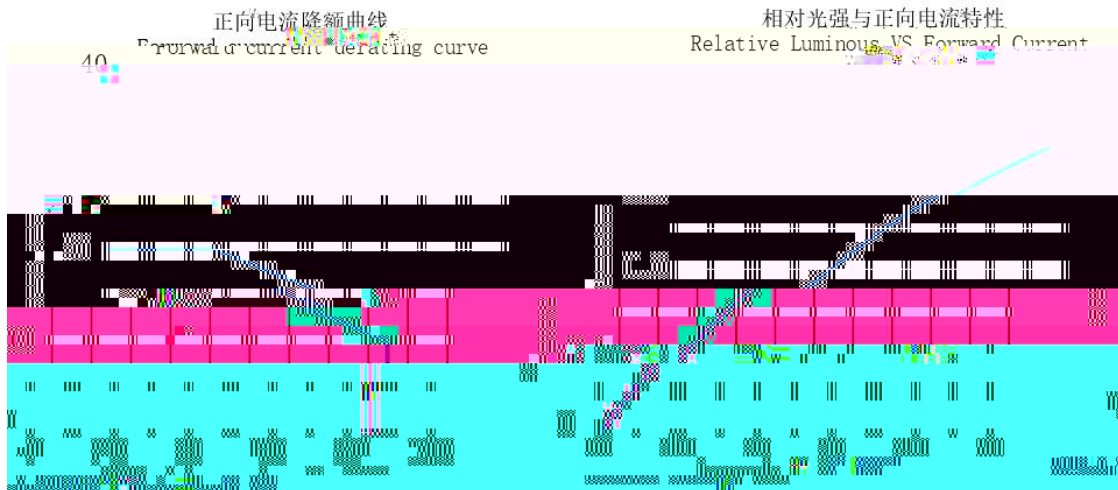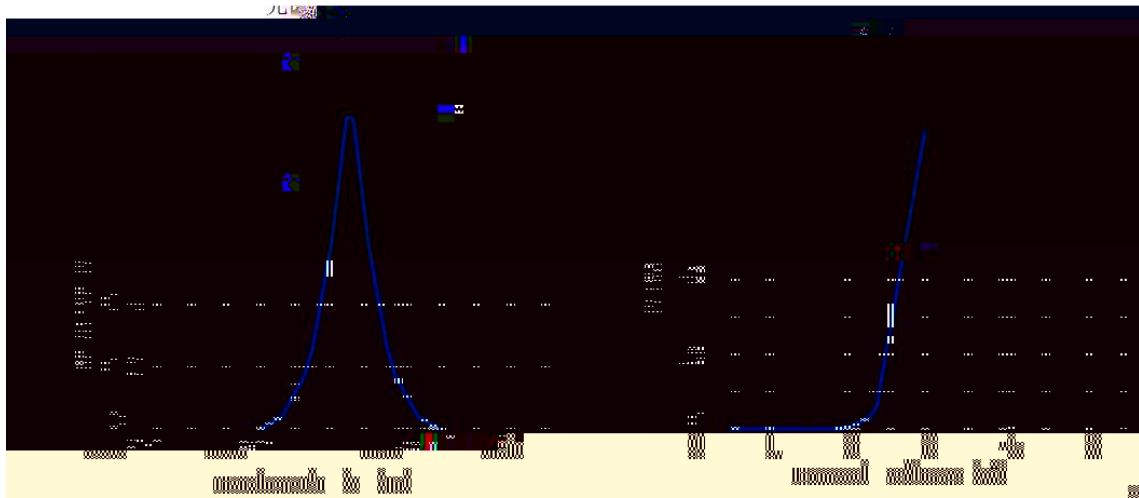



外形尺寸

Outline Dimension





Part No. :

使用注意事項 ()

設計建議

Design Consideration

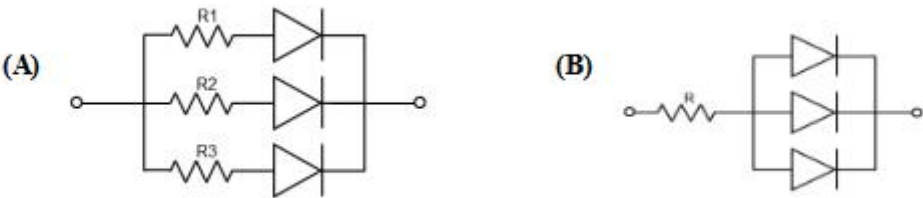

使用注意事项目 ()

4、其他事项:

Others

