XINGLIGHT®

Part :XL-5[illegible]C-WS2812B

技[illegible]数据表

Ð Ũ ѽ

特点（C ）：

* L/W/H :5.8*5.0*8.7*27.3mm

outline Dimensions (L / w / h): 5.8*5.0*8.7*27.3mm

* Ũ ѽ Ĩ r : / r

Luminous color and colloid: Colorful magic/Transparent colloid

* Ḡ ROHS

Environmental protection products Complied With ROHS Directive

* MSL :2

Moisture sensitivity level MSL : 2 levels

* EIA ‰´

EIA standard packaging

* G SMT

Suitable for SMT automatic production

* G L

应用领域（P ）：

* LED~ ŭ Ď D

Led full-color luminous word lamp n

WS2

1.F5

The F5 ba
dri ps*ig

目录

电性参数

曲型特性曲线

可靠性实验

外形尺寸

包装

使用注意事项

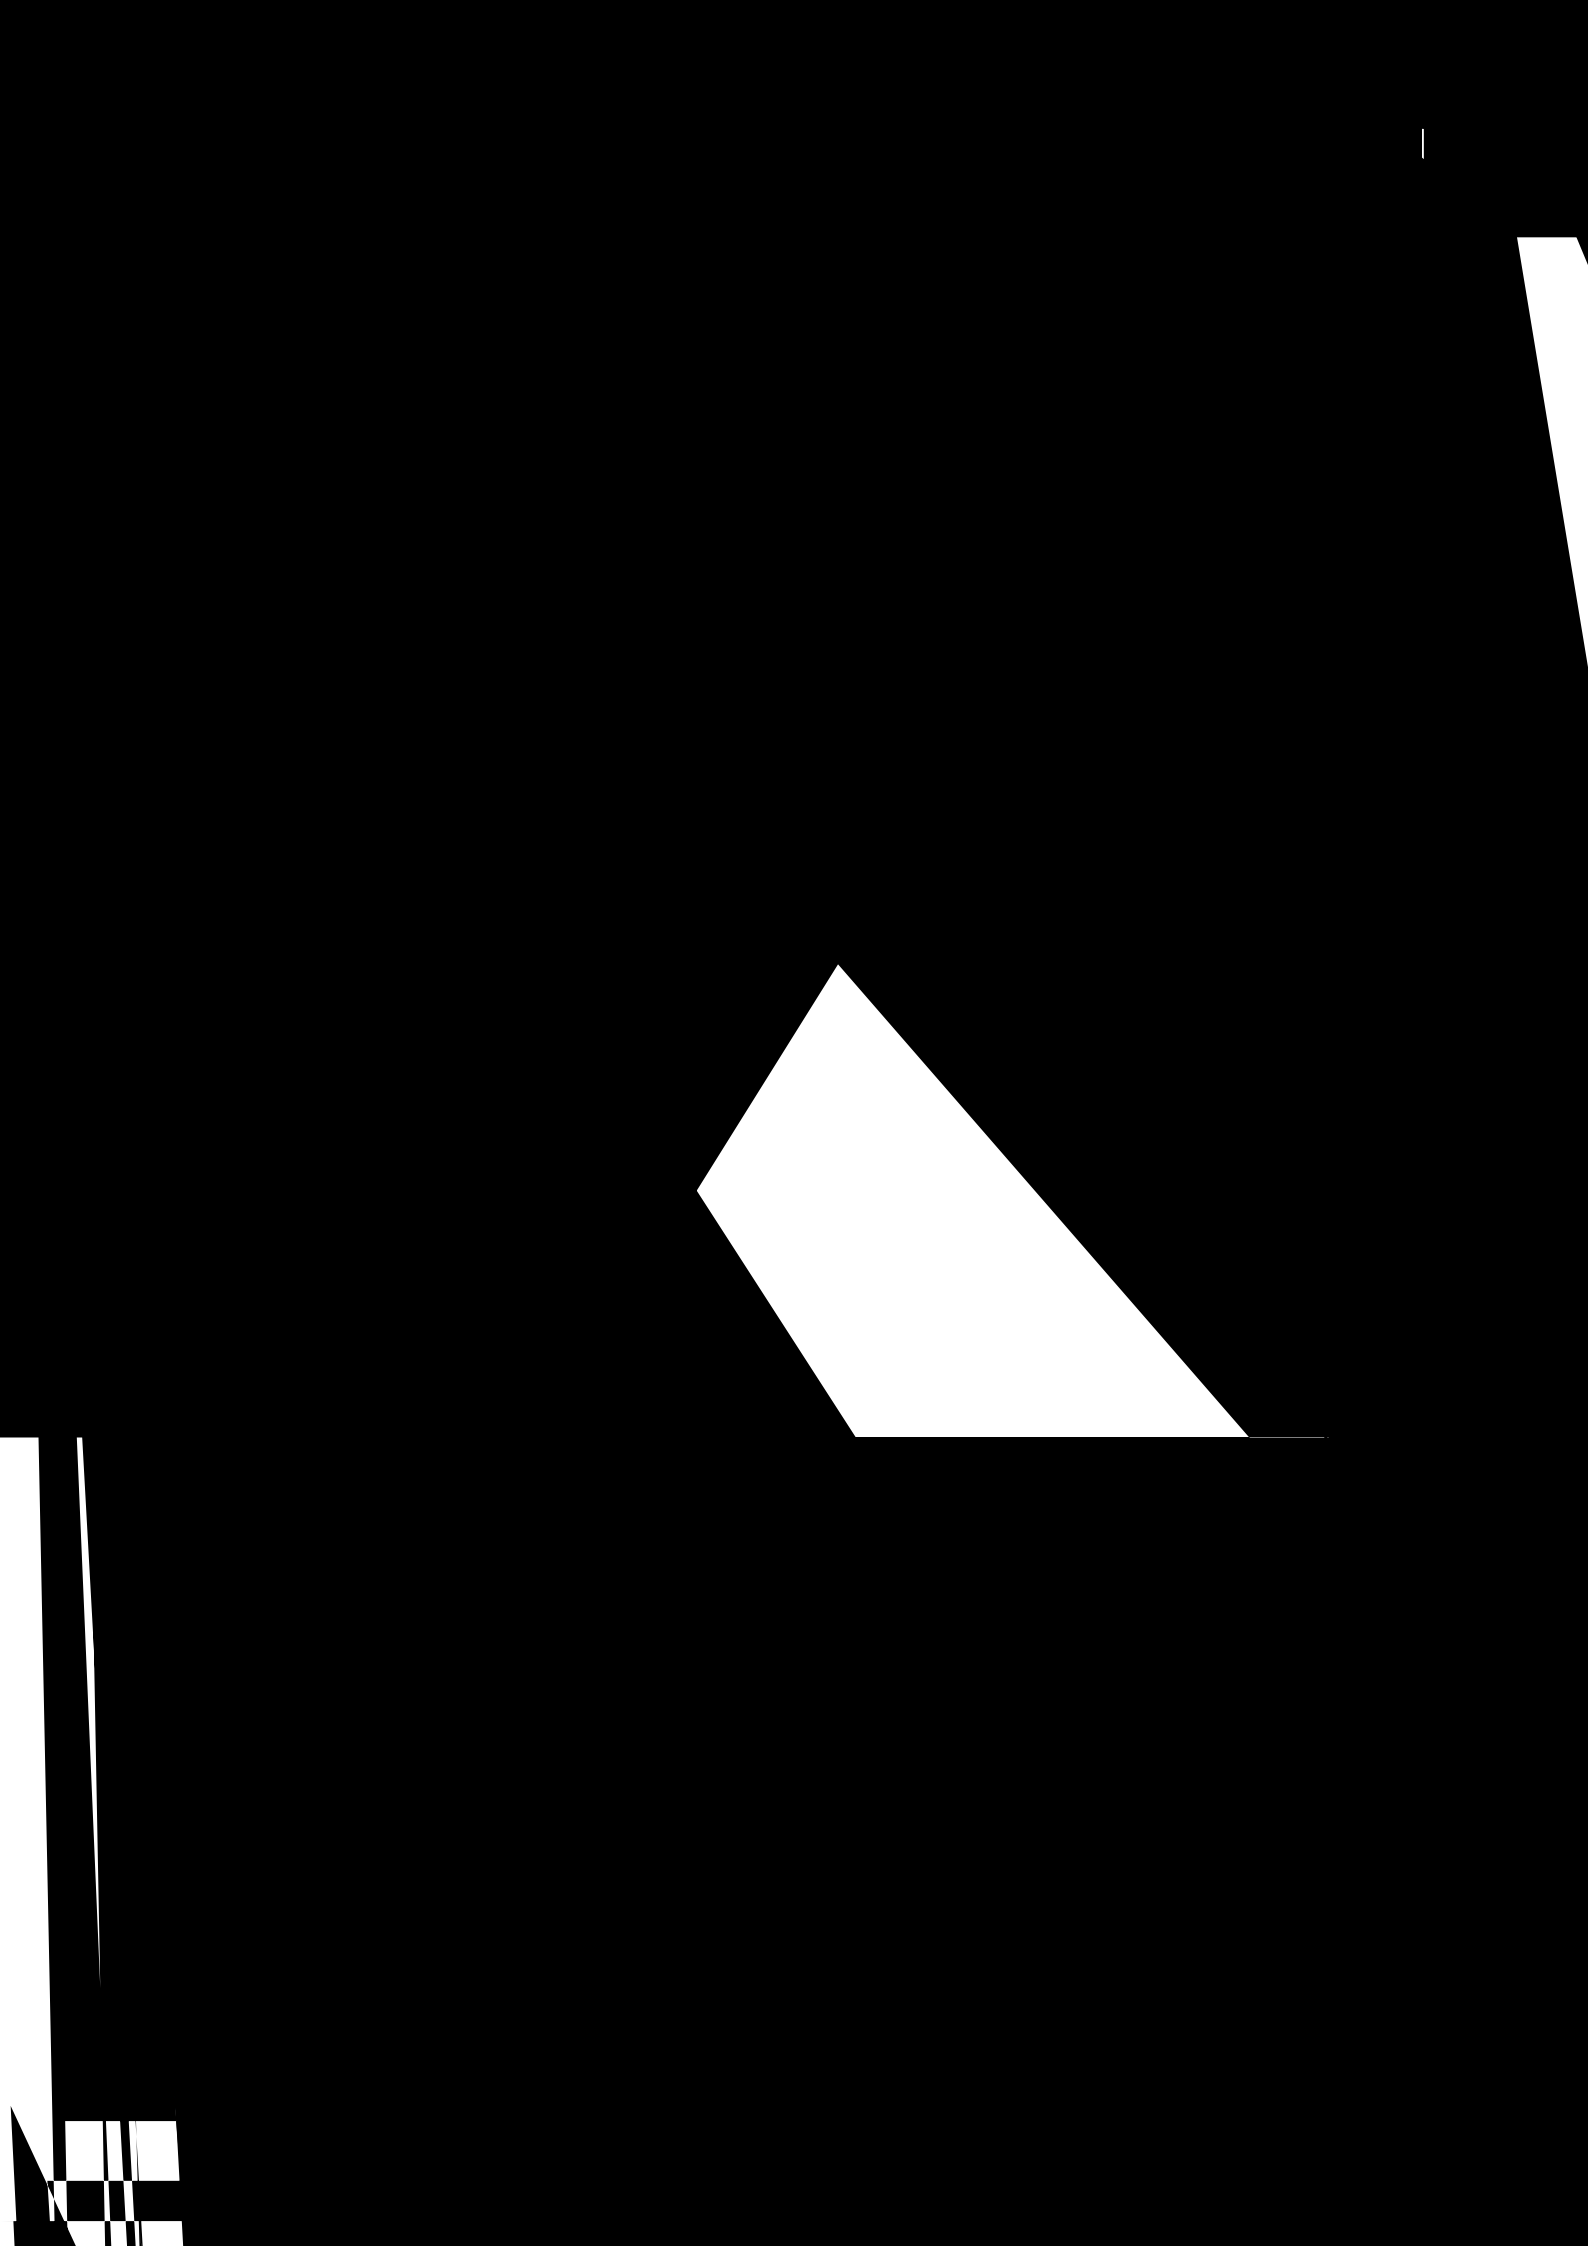

:

D

ì D1 MCU ŭ D2 D3 D4 - ŭ

Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit

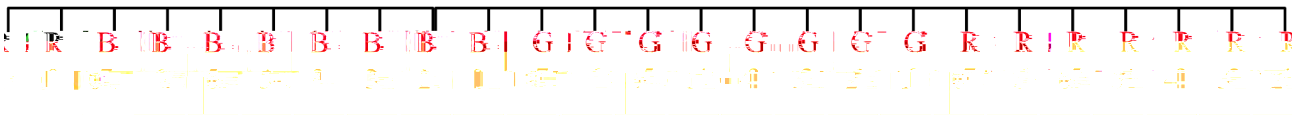

β ώ ŭ GRB ŭ

Note: high order first send, send data in the order of GrB

典型特性曲线

Typical Characteristics Curves

光谱分布曲线

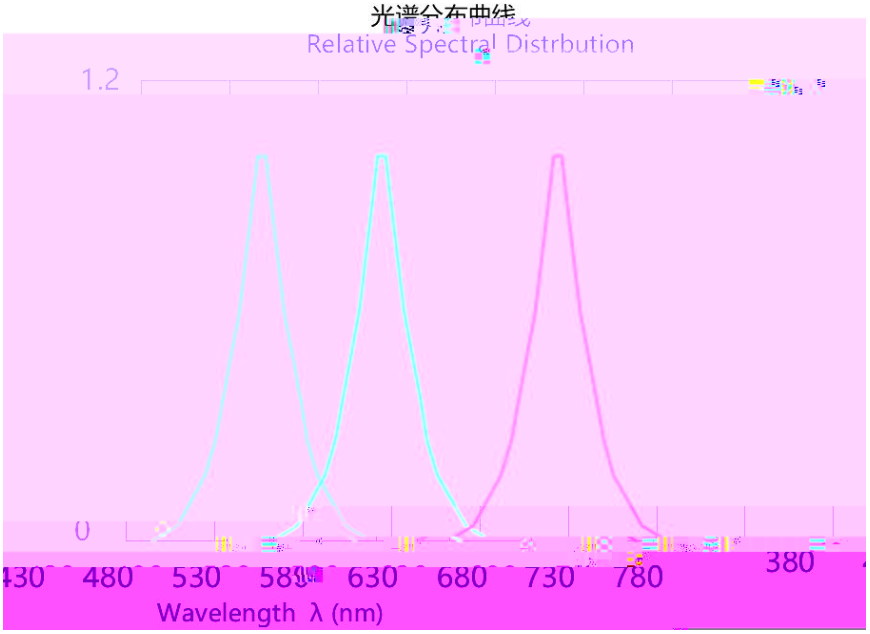
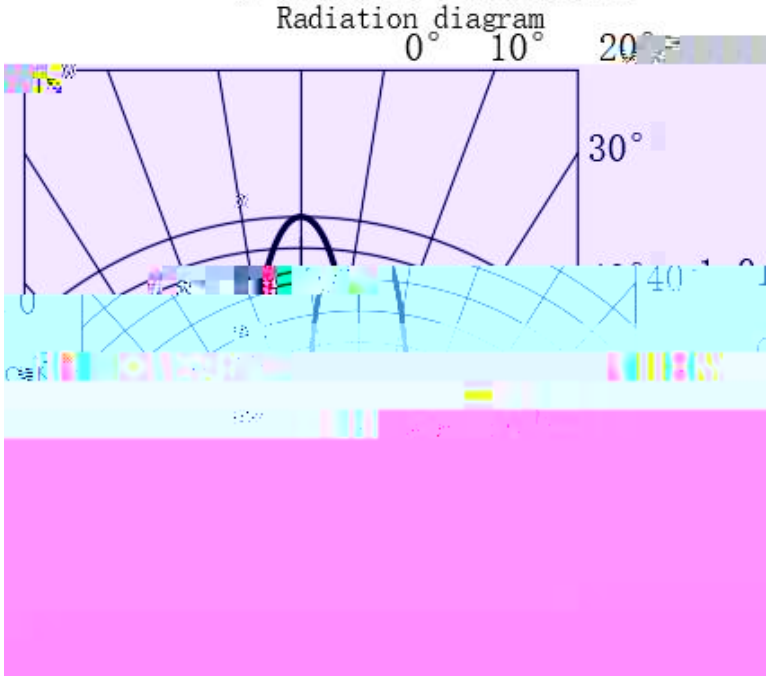
相对辐射强度与空间角度关系