XL-502UYC F5 技术数据表

## 特点（ ）：

* : F5/5.5*5.0*8.7*18mm
Appearance dimension: F5/5.5*5.0*8.7*18mm
* : /
Luminous color and colloid: yellow brightness White /water colloid
* ROHS
Environmental protection products meet ROHS requirements
* MSL :2
Moisture sensitivity level MSL : 2 levels
* EIA
EIA standard packaging
*
Long operating life
*
High energy efficiency, fast startup
*
Low voltage DC drive

## 应用领域（ ）：

* ;
Home appliances, digital, communication
*
Automotive Electronics
*
Lighting decoration
*
electronic toy
*
electronic clock
*
Traffic instructions
*
Medical beauty instruments
*
Electronic teaching equipment
*
Urban lighting

# 目录

Catalogue

## 电性参数

| | | | |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| Luminous Intensity | Iv | 900 | 1300 | 1800 | mcd | IF=20mA |
| Dominant Wave Length | λd | 585 | 590 | 595 | nm | IF=20mA |
| Peak Wave Length | λp | / | 590 | / | nm | IF=20mA |
| Forward Voltage | | | | | | |

亮度分档

：

| 代码 | 最小值 |
| --- | --- |

电压分档

：

波长分档

# 典型特性曲线

光谱分布曲线

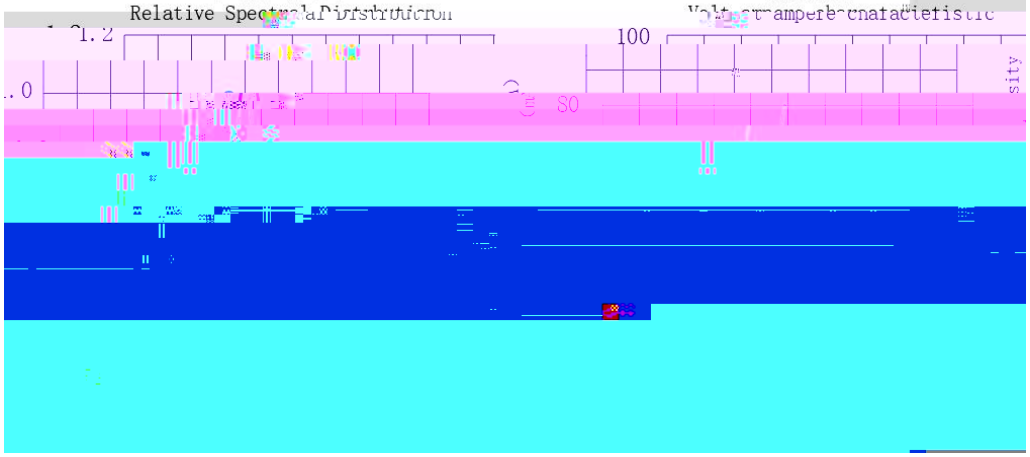

伏安特性



正向电流降额曲线

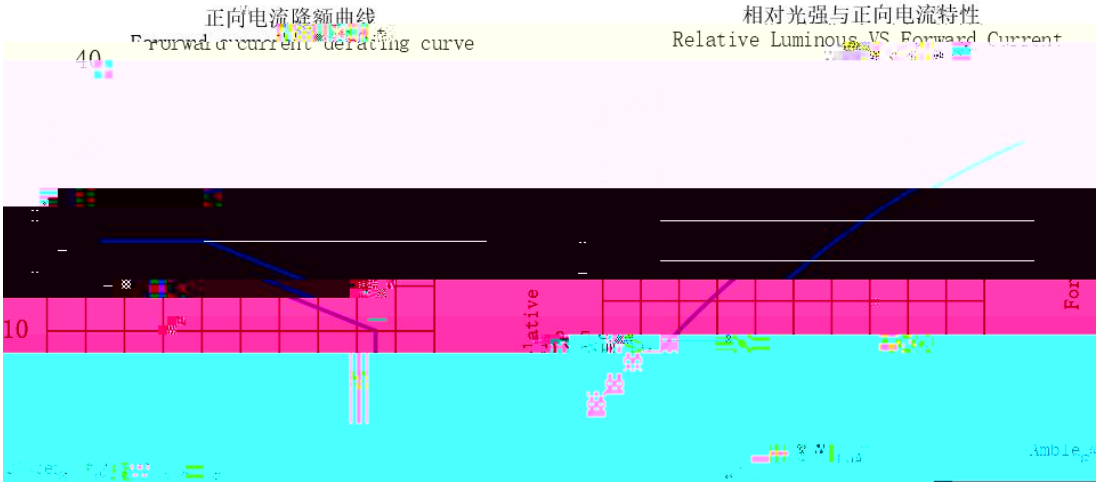

相对光强与正向电流特性



光强与环境温度曲线

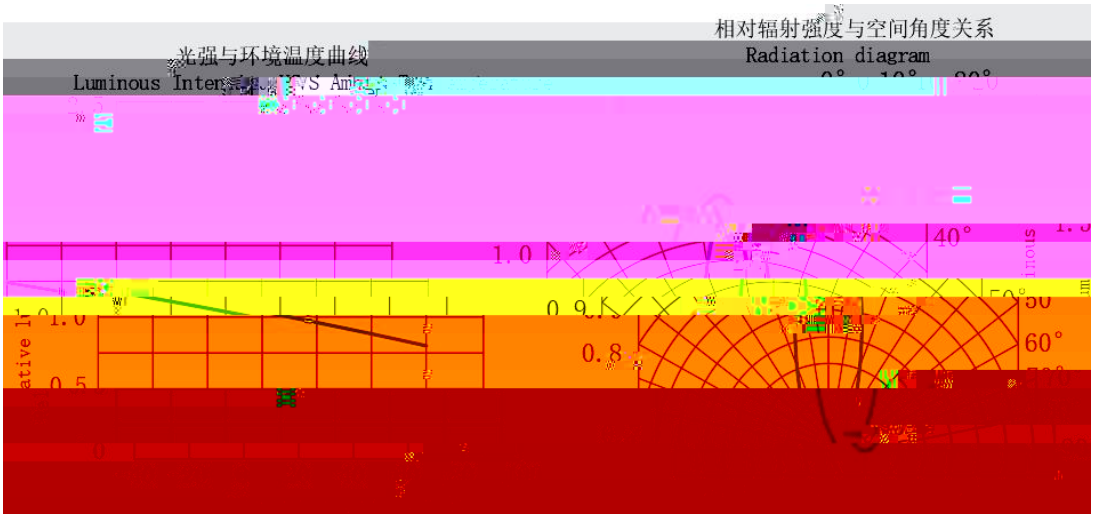

相对辐射强度与空间角度关系

# 可靠性试验

## Reliability Test Items And Conditions

| | | | | | |
|---|---|---|---|---|---|
| Endurance test | Working life | Ta=25 ±5 ,IF=20mA | 1000hrs | 22 PCS | 0/1 |
| | High temperature and high humidity experiment | Ta= 85±5 , RH= 85 90% | 1000hrs | 22 PCS | 0/1 |
| | High-temperature storage | Ta= 85±5 | 1000hrs | 22 PCS | 0/1 |
| | Low temperature storage | Ta= -40±5 | 1000hrs | 22 PCS | 0/1 |
| Environmental testing | Cold and hot cycle | 100 ±5 30mins 5mins -40 ±5 30mins | 100 Circles | 22 PCS | 0/1 |
| | Hot and cold impact | 105 ±5 5mins -45 ±5 5mins | 100 Circles | 22 PCS | 0/1 |
| Mechanical Test | Resistance to Soldering Heat | T.sol= 250 ± 5 | 2times | 22 PCS | 0/1 |
| | Lead Integrity | Load 2.5N(0.25kgf) 0 °~ 90 ° ~ | | | |

# 外形尺寸

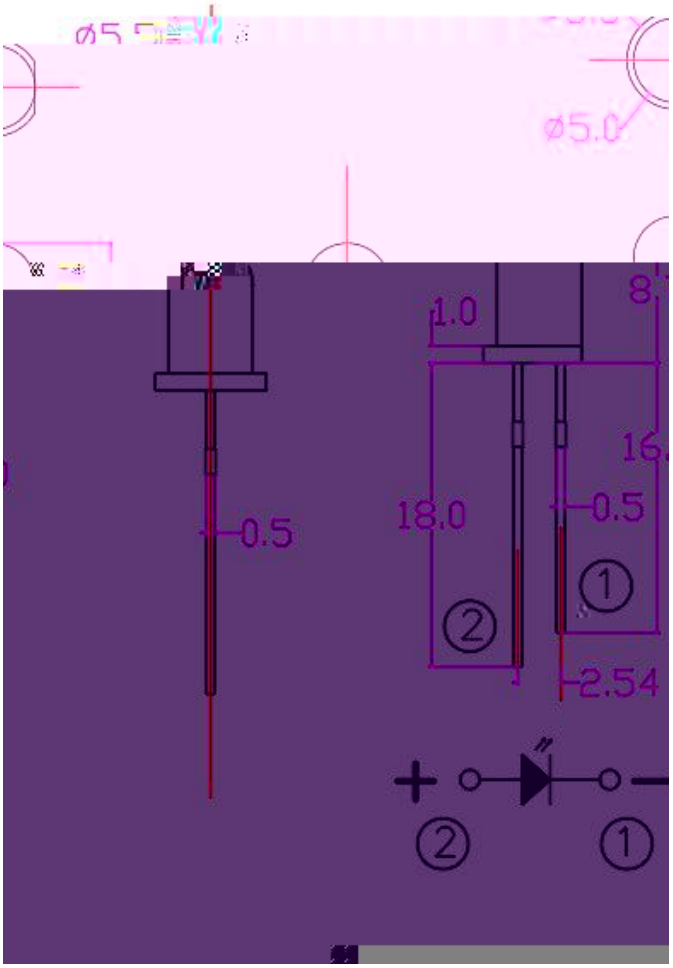


1.

2. mm .

使用注意事项(2)

(2)

LED

LED

使用注意事项（

()

**8、其他事项：**

*

*



*