


技术数据表

红 贴片式发光二极管

特点 (C) :

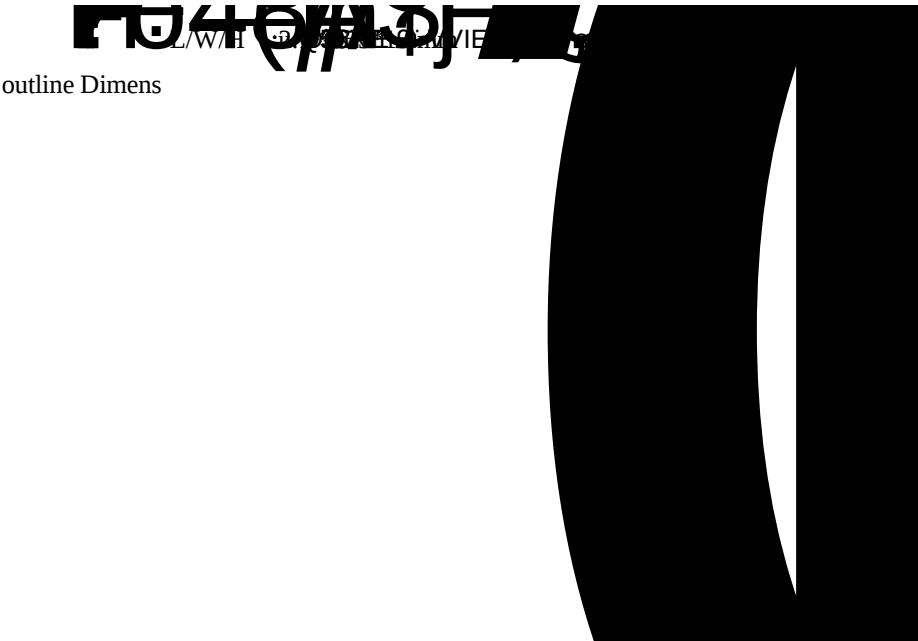

应用领域 (P) :



电性参数

--	--

		-40 ~ +85 C	
		-40 ~ +85 C	

* 0.1ms 1/10

* Note: Pulse width 0.1ms, Duty 1/10

光電參數

光電參數 Ta=25

--	--



可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Reference standard

MT pμæ€ (0

Part No. : XL2000














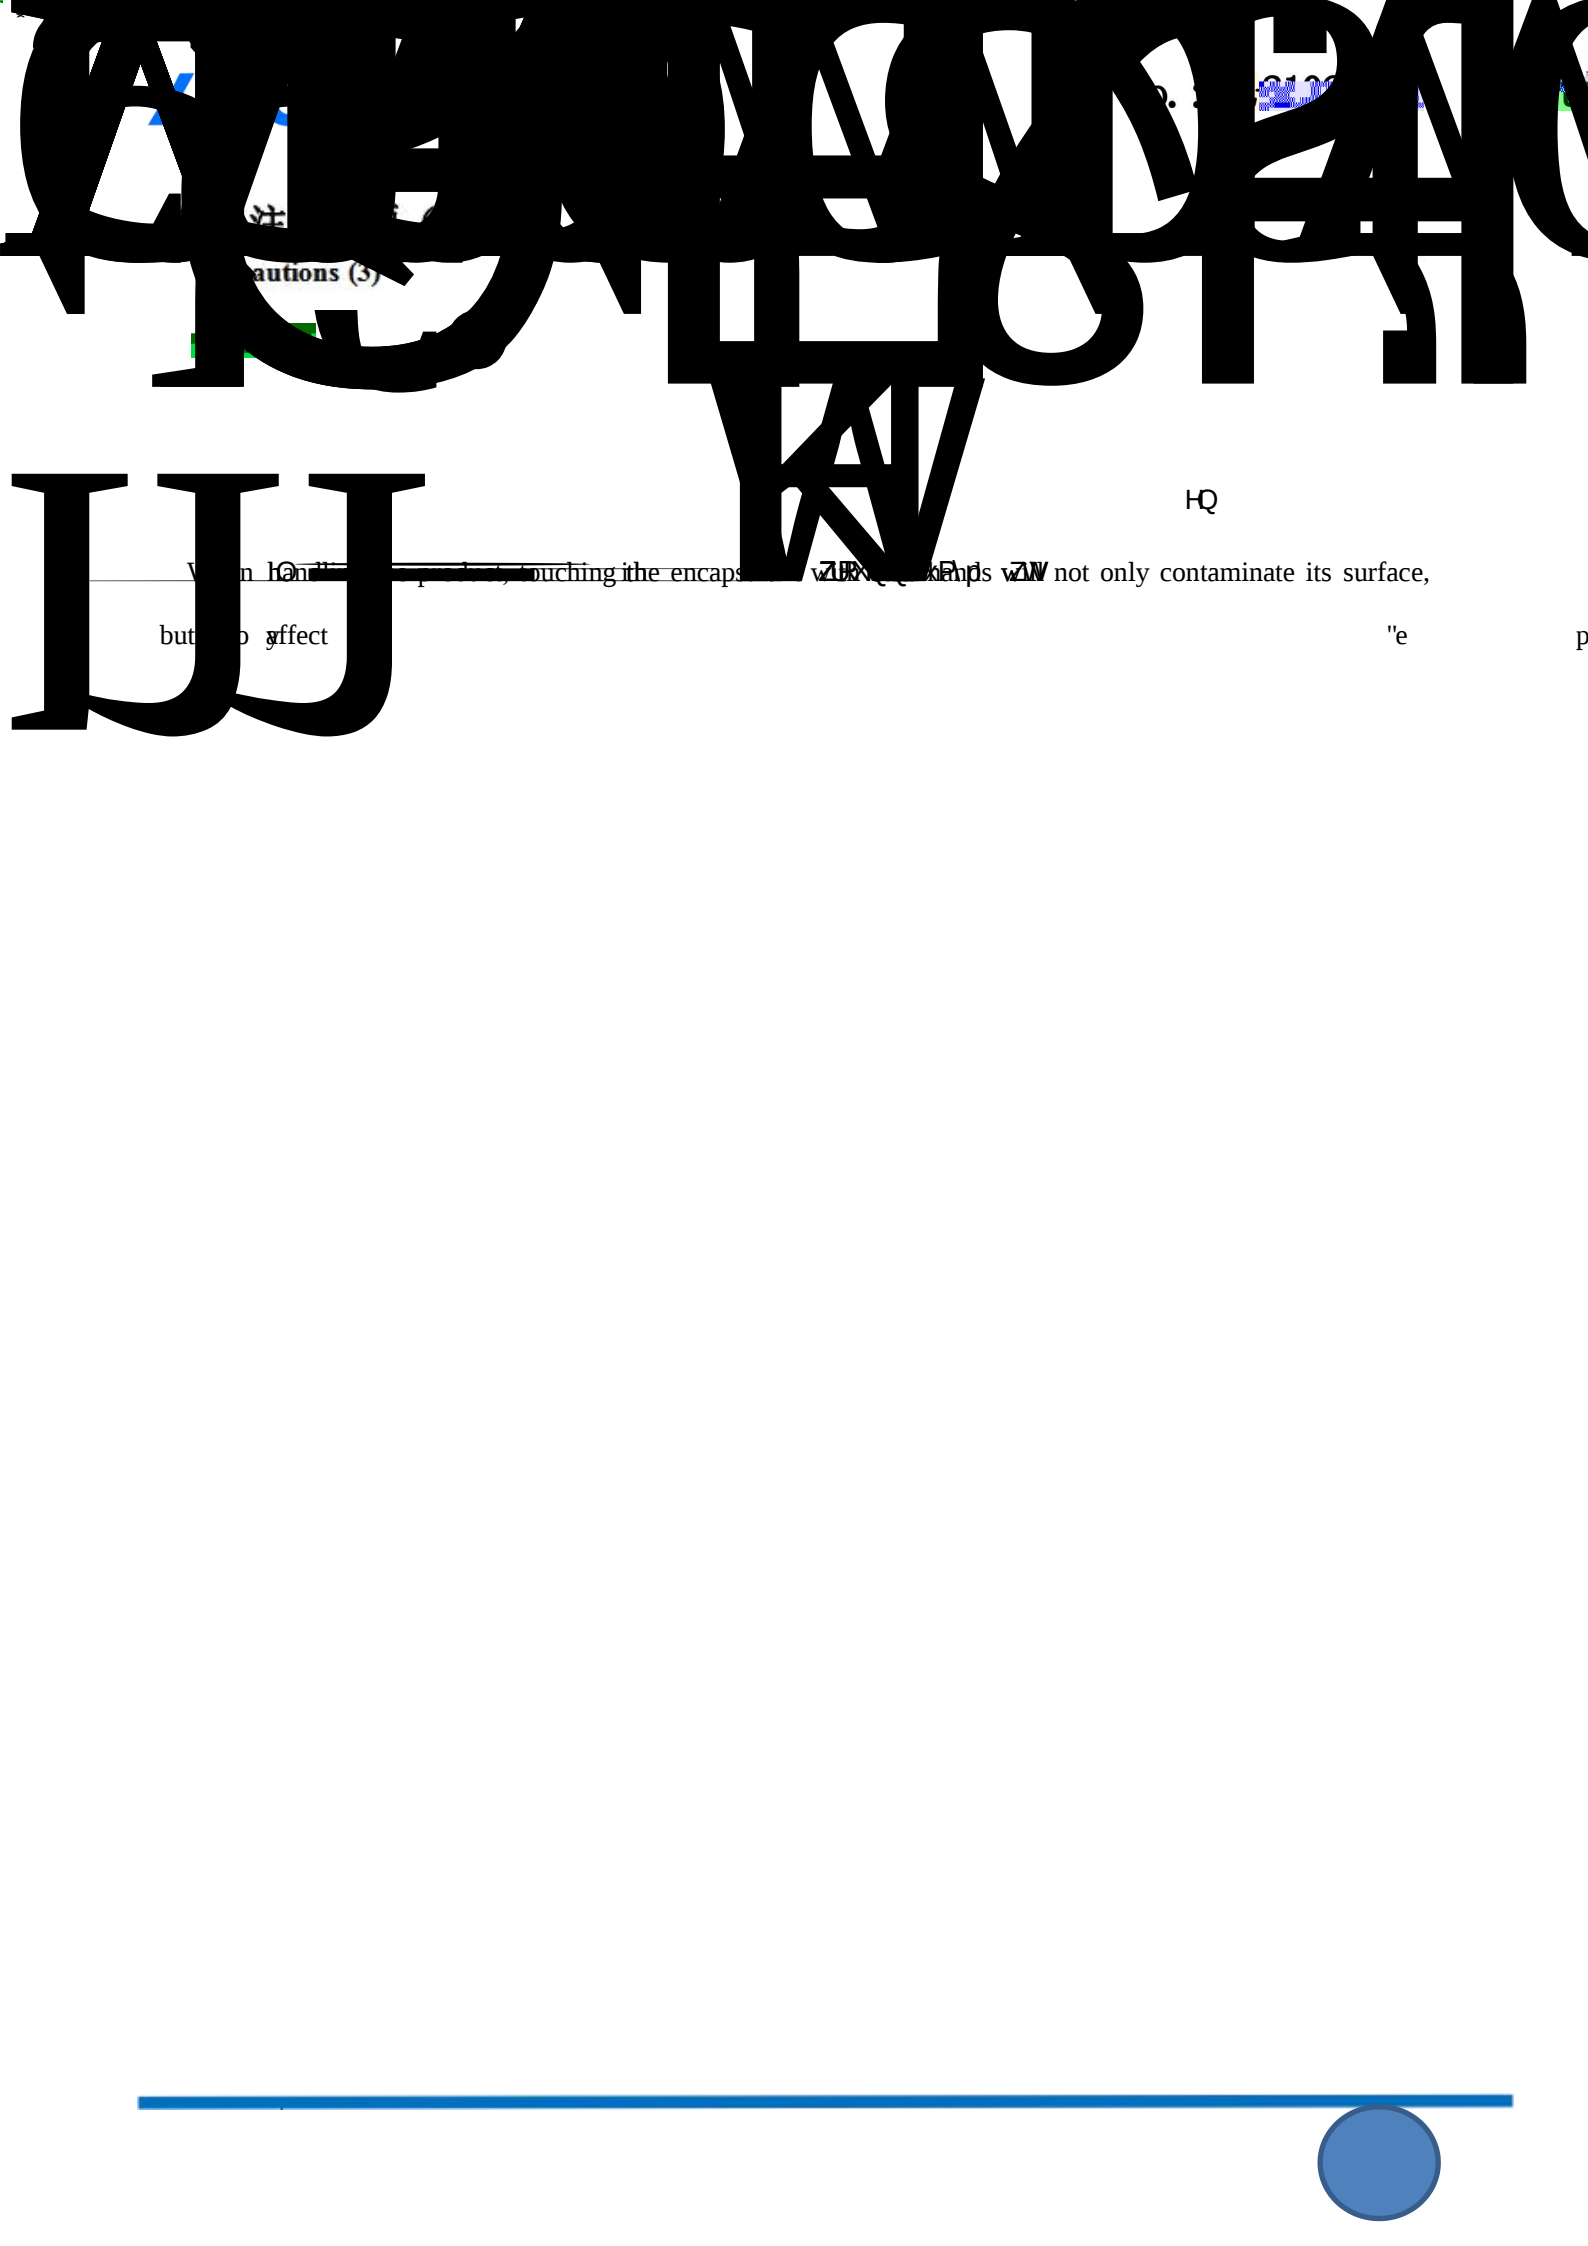

utions (3)

HQ

When the " " is touching the encapsulation, the encapsulation not only contaminate its surface, but also affect the "e" p

