



目录

Catalogue



电性参数

Parameter	Symbol	Rating	Unit
Consumed power	Pd	70	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFp	80	mA
Operating ambient temperature	Topr	-	



亮度分档

:

代码	最小值	最大值	单位	测试条件
A4	300	400	mcd	IF=20mA
A5	400	500		
A6	500	700		
A7	700	900		


电压分档

:


代码	最小值	最大值	单位	测试条件
N13-3	2.8	3.0	V	IF=20mA
N13-4	3.0	3.2		
N13-5	3.2	3.4		

波长分档

代码	最小值	最大值	单位	测试条件
HB04	460	465	nm	IF=20mA
HB05	465	470		
HB06	470	475		



典型特性曲线

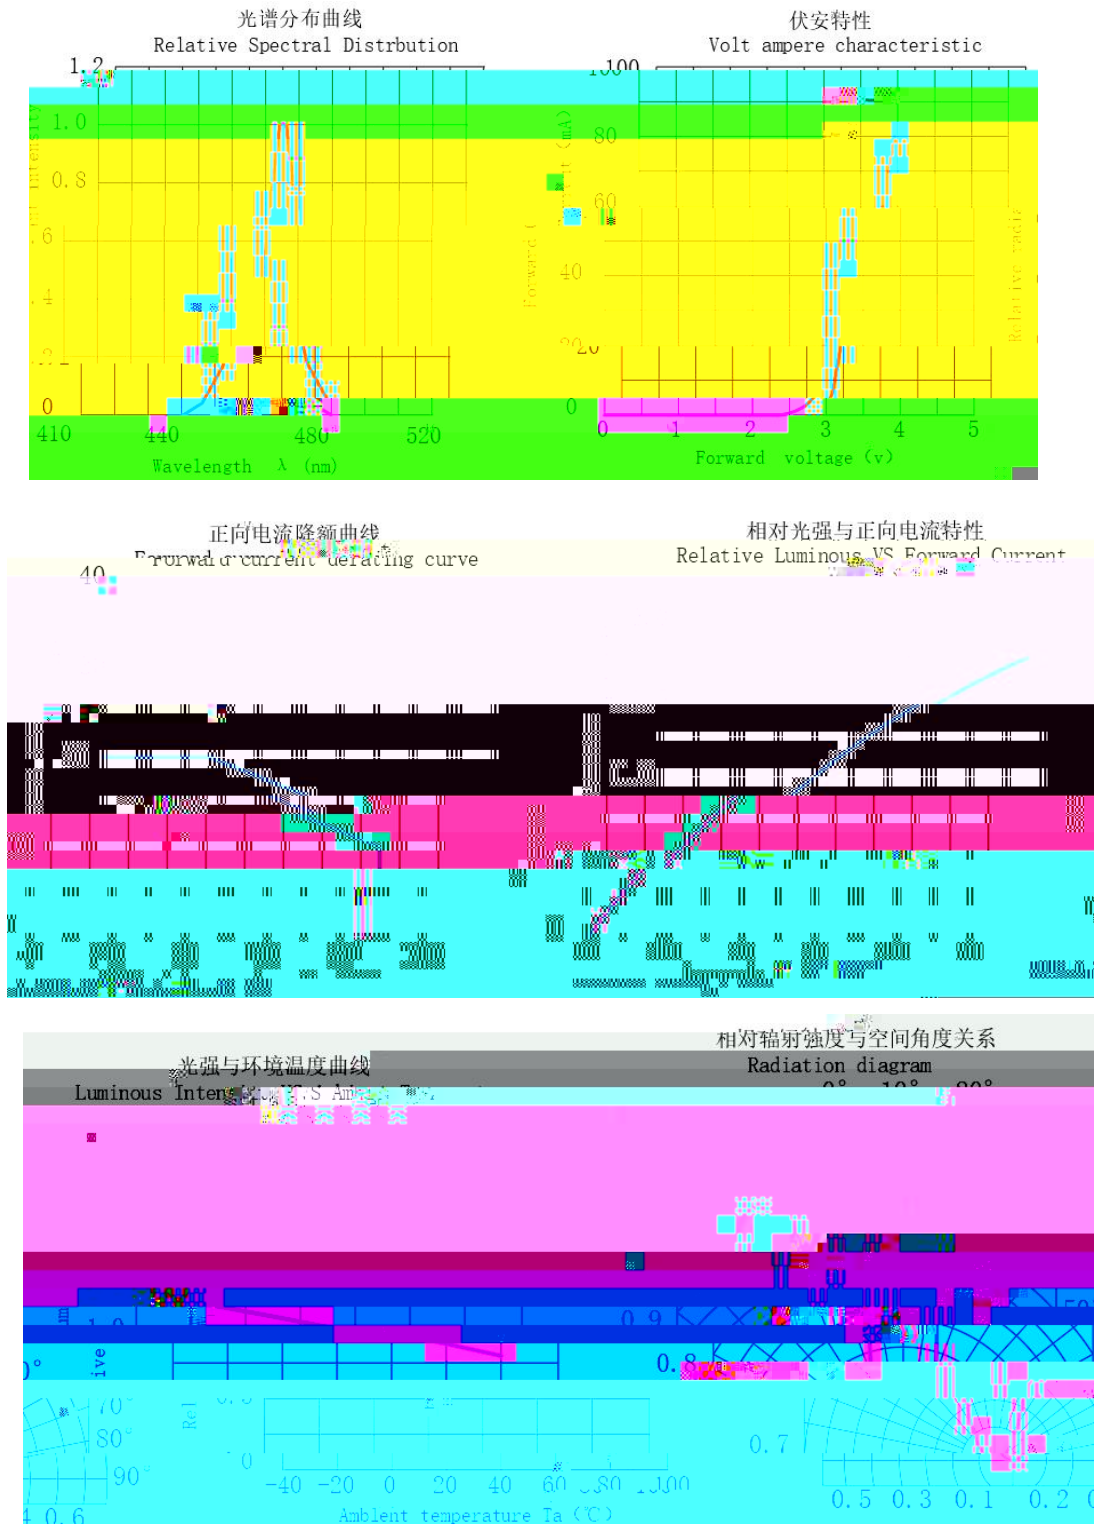


25±5 /Note If not otherwise indicated the test environment temperature is 25±5




可靠性试验

Reliability Test Items And Conditions

Class	Test item
-------	-----------



外形尺寸

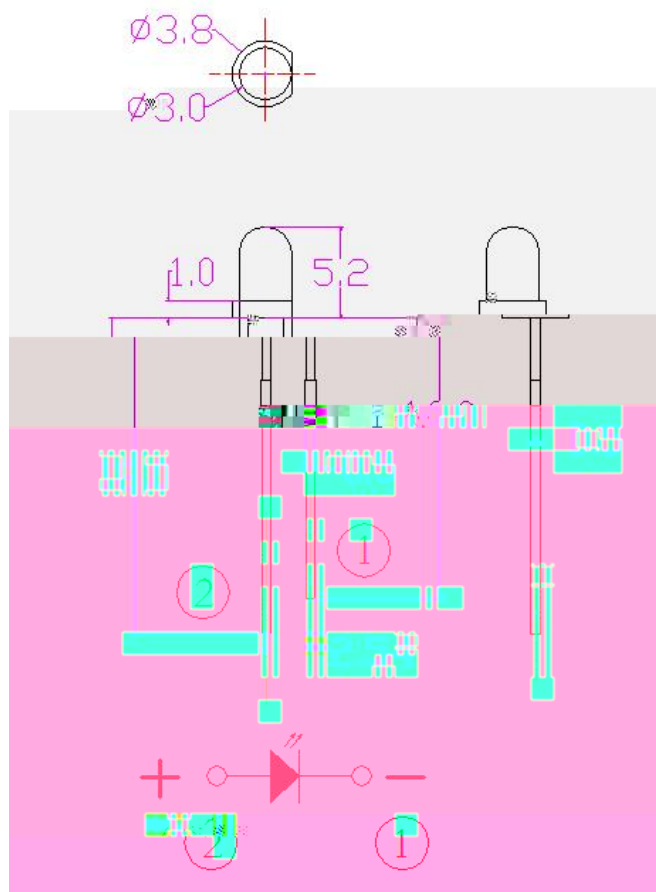

(Note)

1.

Dimensions are in millimeters.

2.


$\pm 0.50\text{mm}$.

Tolerances unless mentioned are $\pm 0.50\text{mm}$.




包装

- *
In Bags
- *
Moisture Proof and Anti-Static Foil Bag

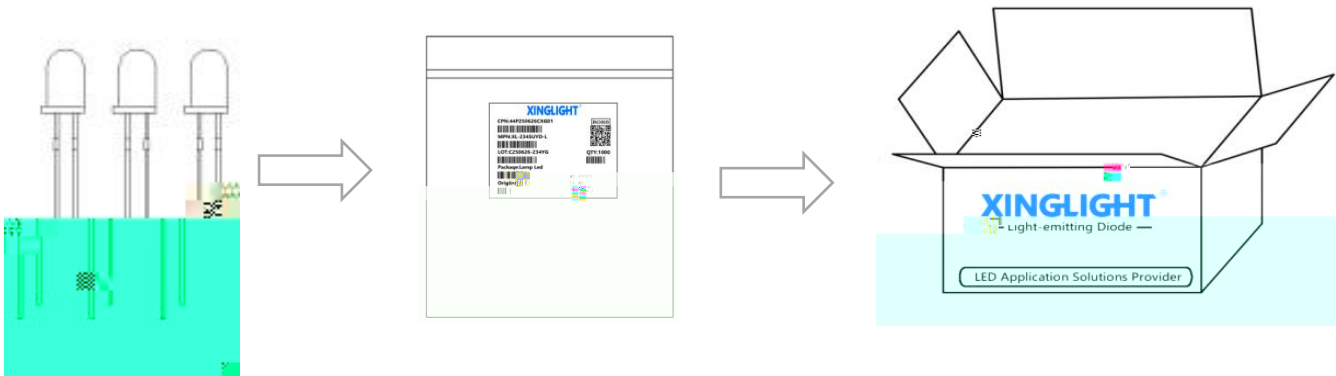

标签说明 Label Expansion

CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
WL: 波长代码	IV: 亮度代码
ORIGIN: 产地	QTY: 数量
PACKAQE: 封装	

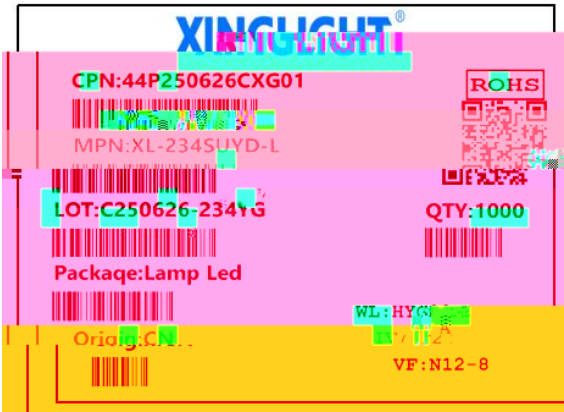


使用注意事項 ()

1.
- LED
- LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

j -



使用注意事項 ()



